

Technical Data Sheet

TOP View LEDs

67-21UBC/C430/TR8

Features

- P-LCC-2 package.
- White package.
- Optical indicator.
- Colorless clear window.
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment.
- Available on tape and reel (8mm Tape).
- Pb-free.
- The product itself will remain within RoHS compliant version

Descriptions

• The 67-21 series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes TOP LED ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- Light pipe application.
- General use.

Device Selection Guide

Chip		T 0.1	
Material	Emitted Color	Lens Color	
GaN/SiC	Purplish Blue	Water Clear	




Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 3 Page: 1 of 9

0.8


EVERLIGHT ELECTRONICS CO.,LTD.

67-21UBC/C430/TR8

Package Dimensions

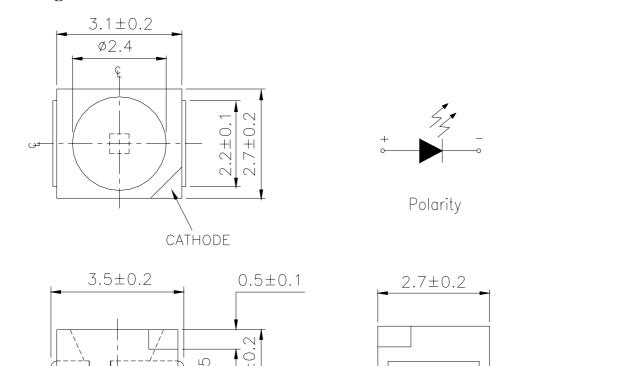



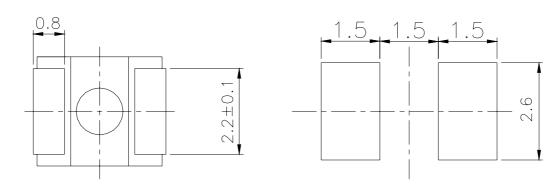

Notes: All dimensions are in millimeters

Everlight Electronics Co., Ltd.

Device No.: DSE-671-010

http://www.everlight.com

Prepared date:17-Sep-2005

Rev. 3

Page: 2 of 9

Prepared by: Teresa Lee



67-21UBC/C430/TR8

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I F	30	mA
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	Tstg	-40~ +100	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	260 (for 5 second)	$^{\circ}\!\mathbb{C}$
Electrostatic Discharge(HBM)	ESD	1000	V
Power Dissipation	Pd	130	mW
Peak Forward Current (Duty 1/10 @ 1KHz)	$I_{ ext{FP}}$	70	mA


Electro-Optical Characteristics (Ta=25 $^{\circ}$ C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	Iv	35	55		mcd		
Viewing Angle	2 \theta 1/2		120		deg	IF=20mA	
Peak Wavelength	λp		428		nm		
Dominant Wavelength	λd		466		nm	ir–20mA	
Spectrum Radiation Bandwidth	Δλ		65		nm		
Forward Voltage	Vf		3.8	4.5	V		
Reverse Current	Ir			50	μ A	V _R =5V	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 3 Page: 3 of 9

67-21UBC/C430/TR8

Typical Electro-Optical Characteristics Curves

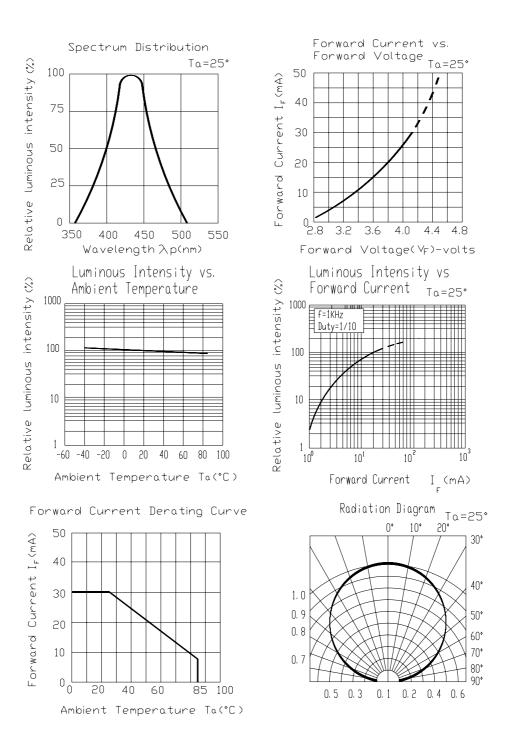

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 3 Page: 4 of 9

Device No.: DSE-671-010 Prepared date:17-Sep-2005 Prepared by: Teresa Lee




67-21UBC/C430/TR8

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

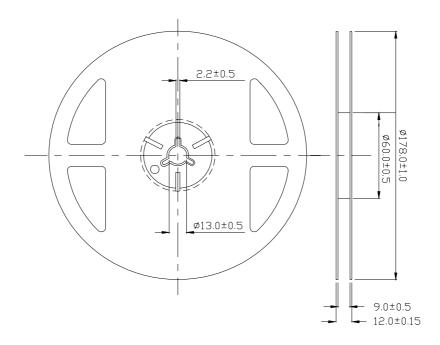

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

 $Everlight\ Electronics\ Co.,\ Ltd.$

Device No.: DSE-671-010

http://www.everlight.com

Prepared date:17-Sep-2005


Rev. 3 Page: 5 of 9

Prepared by: Teresa Lee




67-21UBC/C430/TR8

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

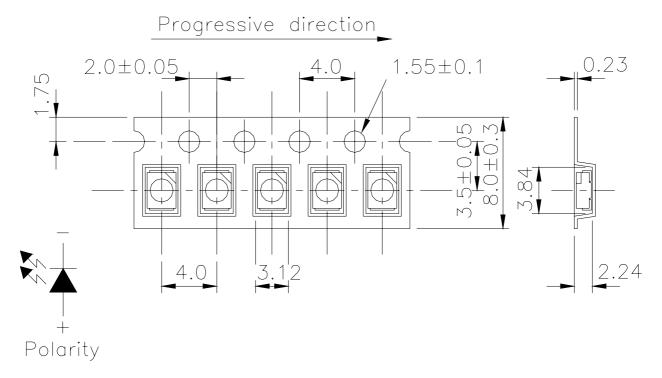

Note: The tolerances unless mentioned is ± 0.1 mm

Moisture Resistant Packaging

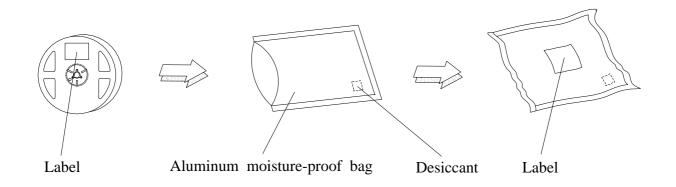

Everlight Electronics Co., Ltd.

Device No.: DSE-671-010

http://www.everlight.com

Prepared date:17-Sep-2005

Rev. 3

Page: 6 of 9

Prepared by: Teresa Lee



67-21UBC/C430/TR8

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 3 Page: 7 of 9



67-21UBC/C430/TR8

Precautions For Use

1. Over-current-proof


Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30° C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5°C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

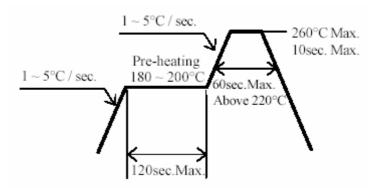

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 3 Page: 8 of 9


Device No.: DSE-671-010 Prepared date:17-Sep-2005 Prepared by: Teresa Lee



67-21UBC/C430/TR8

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

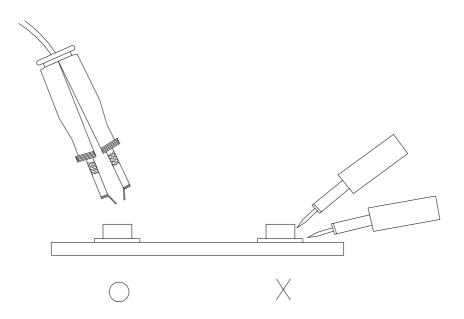

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 3 Page: 9 of 9