# MAFL-009055-CD4254



**Broadband CATV Diplexer** 5 - 1000 MHz

M/A-COM Products Part Status: V1

#### **Features**

- 75 Ohm
- SMT Unit
- **RoHS Compliant**
- **Excellent Temperature Stability**
- **Excellent Repeatability**

#### **Description**

M/A-COM's MAFL-009055-CD4254 is a low cost, SMT diplex filter designed for CATV, DTV, DBS, cable modem and set top box applications. The technology used in this design is patent pending.




#### **Pin Configuration**

Function	Pin Number
Ground	1, 2, 4, 5, 7, 8, 9, 11
Low Pass Port	3
High Pass Port	6
Common	10


## **Ordering Information**

Part Number	Package
MAFL-009055-CT4254	200 per reel
MAFL-009055-CT42TB	Customer test board

#### **Schematic**



#### Case Style SM-162

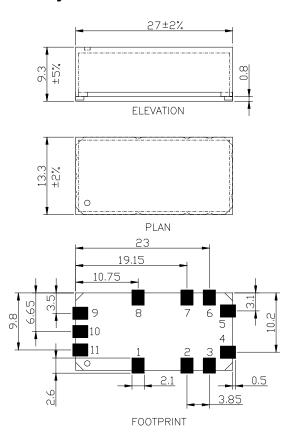

Dimensions are millimeters.

Tolerance:  $.x \pm 0.1$ ,  $.xx \pm 0.05$ , except where specified.

• India Tel: +91.80.4155721

• China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

# MAFL-009055-CD4254



**Broadband CATV Diplexer** 5 - 1000 MHz

M/A-COM Products

Part Status: V1

### Electrical Specifications: $T_A = 25$ °C, $Z_0 = 75\Omega$

Parameter	Test Conditions	Units	Min.	Тур.	Max.
Frequency Range	5-42 MHz / 54-1000 MHz				
Insertion Loss	5-42 MHz 54-1000 MHz	dB dB		0.5 0.5	1.1 1.2
Isolation	5-37 MHz 37-42 MHz	dB dB	50 43	55 48	_
	42-54 MHz	dB	16	19	_
	54-100 MHz 100-600 MHz 600-1000 MHz	dB dB dB	45 50 45	50 55 50	
Input Port Return Loss	5-42 MHz 54-1000 MHz	dB dB	12 12	16 16	

Additional Specifications (MHz)	Group Delay (ns) Typ. Max		
40.5 - 42	5	20	
54 - 55.5	10	20	


### **Absolute Maximum Ratings**

Commitment to produce in volume is not guaranteed.

Parameter	Absolute Maximum
RF Power	250mW
DC Current	30mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C

## **Recommended PCB Configuration**

Note: Pad size dimensions match size of those specified in SM-162 case style drawing.



Note: Substrate is 1.6mm thick FR-4. A ground plane is directly under diplexer. This is connected to the ground plane on the bottom of the PCB. This forms a 75 Ohm co-planar wave guide for input and output transmission lines.

<sup>•</sup> India Tel: +91.80.4155721

<sup>•</sup> China Tel: +86.21.2407.1588

# MAFL-009055-CD4254




**Broadband CATV Diplexer** 5 - 1000 MHz

M/A-COM Products


Part Status: V1

Typical Performance:  $T_A = 25^{\circ}C$ ,  $Z_0 = 75\Omega$ 


## **Input Return Loss**

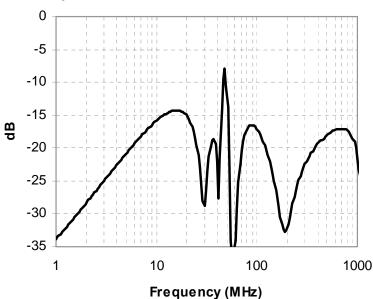


#### Isolation

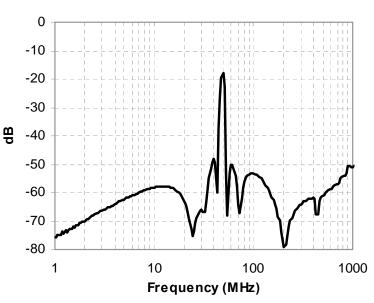

### **High Pass Filter Insertion Loss**

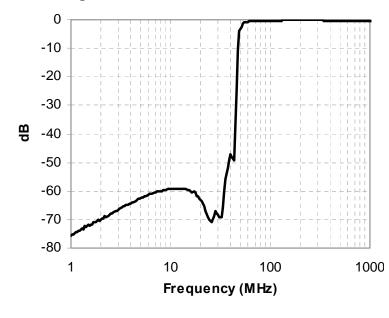

#### **Low Pass Filter Insertion Loss**

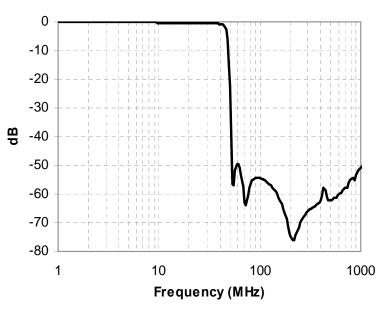

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed. PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400

• India Tel: +91.80.4155721

• China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.