
### **Vishay High Power Products**

# Schottky Rectifier, 2 x 20 A

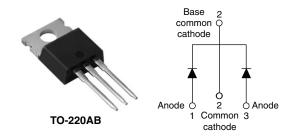


**SHA**`

PRODUCT SUMMARY				
I <sub>F(AV)</sub>	2 x 20 A			
V <sub>R</sub>	15 V			
I <sub>RM</sub> 600 mA at 100 °C				

#### **FEATURES**

High

- 125 °C T<sub>J</sub> operation (V<sub>R</sub> < 5 V)</li>
- · Center tap configuration
- Very low forward voltage drop



- · High frequency operation
- · Guard ring for enhanced ruggedness and long term reliability
- Lead (Pb)-free ("PbF" suffix)
- · Designed and qualified for industrial level

#### DESCRIPTION

This center tap Schottky rectifier has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to 125 °C junction temperature. Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

MAJOR RATINGS AND CHARACTERISTICS					
SYMBOL	CHARACTERISTICS	VALUES	UNITS		
I <sub>F(AV)</sub>	Rectangular waveform	40	A		
V <sub>RRM</sub>		15	V		
I <sub>FSM</sub>	$t_p = 5 \ \mu s \ sine$	700	А		
V <sub>F</sub>	19 Apk, $T_J = 125 \ ^\circ C$ (per leg)	0.25	V		
TJ	Range	- 55 to 125	٥C		

VOLTAGE RATINGS					
PARAMETER	SYMBOL	40L15CTPbF	UNITS		
Maximum DC reverse voltage	V <sub>R</sub>	15	V		
Maximum working peak reverse voltage	V <sub>RWM</sub>	15	v		

ABSOLUTE MAXIMUM RATINGS						
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS	
Maximum average pr	er leg	$I_{F(AV)}$ 50 % duty cycle at T <sub>C</sub> = 85 °C, rectangular waveform		20		
See fig. 5 per d				40	А	
Maximum peak one cycle non-repet		5 $\mu s$ sine or 3 $\mu s$ rect. pulse	Following any rated load condition and with	700		
surge current per leg See fig. 7	IFSM	10 ms sine or 6 ms rect. pulse	rated V <sub>RRM</sub> applied	330		
Non-repetitive avalanche energy pe	leg E <sub>AS</sub>	$T_{J} = 25 \text{ °C}, I_{AS} = 2 \text{ A}, L = 6 \text{ mH}$		10	mJ	
Repetitive avalanche current per leg	I <sub>AR</sub>	Current decaying linearly to zero in 1 $\mu$ s Frequency limited by T <sub>J</sub> maximum V <sub>A</sub> = 1.5 x V <sub>B</sub> typical		2	А	

\* Pb containing terminations are not RoHS compliant, exemptions may apply



### 40L15CTPbF

# Vishay High Power Products Schottky Rectifier, 2 x 20 A



ELECTRICAL SPECIFICATIONS						
PARAMETER	SYMBOL	TEST CONDITIONS		TYP.	MAX.	UNITS
Forward voltage drop per leg See fig. 1	V <sub>FM</sub> <sup>(1)</sup>	19 A	T <sub>J</sub> = 25 °C	-	0.41	v
		40 A		-	0.52	
		19 A	T <sub>J</sub> = 125 °C	0.25	0.33	
		40 A		0.37	0.50	
Reverse leakage current per leg See fig. 2	I <sub>RM</sub> <sup>(1)</sup>	T <sub>J</sub> = 25 °C	V <sub>R</sub> = Rated V <sub>R</sub>	-	10	mA
		T <sub>J</sub> = 100 °C		-	600	
Threshold voltage	V <sub>F(TO)</sub>	$T_J = T_J$ maximum		0.1	82	V
Forward slope resistance	r <sub>t</sub>			7	.6	mΩ
Maximum junction capacitance per leg	CT	$V_{R}$ = 5 $V_{DC}$ (test signal range 100 kHz to 1 MHz) 25 °C		-	2000	pF
Typical series inductance per leg	L <sub>S</sub>	Measured lead to lead 5 mm from package body		8	-	nH
Maximum voltage rate of change	dV/dt	Rated V <sub>R</sub>		10	000	V/µs


#### Note


 $^{(1)}\,$  Pulse width < 300  $\mu s,$  duty cycle < 2 %


THERMAL - MECHANICAL SPECIFICATIONS						
PARAMETER		SYMBOL	TEST CONDITIONS	VALUES	UNITS	
Maximum junction and st temperature range	orage	T <sub>J</sub> , T <sub>Stg</sub>		- 55 to 125	°C	
Maximum thermal resistation to case per leg	ance,	R <sub>thJC</sub>	DC operation	1.5	°C/W	
Typical thermal resistance case to heatsink	e,	R <sub>thCS</sub>	Mounting surface, smooth and greased	0.50		
Approximate weight				2	g	
				0.07	oz.	
Mounting torque	minimum			6 (5)	kgf ⋅ cm	
	maximum			12 (10)	(lbf ⋅ in)	
Marking device			Case style TO-220AB	40L15CT		




Schottky Rectifier, 2 x 20 A Vishay High Power Products

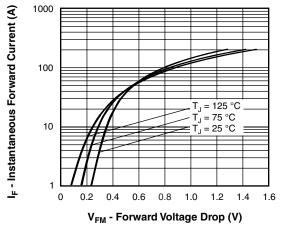



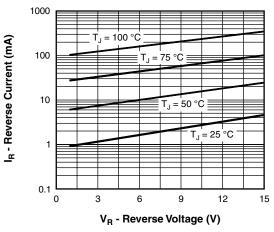





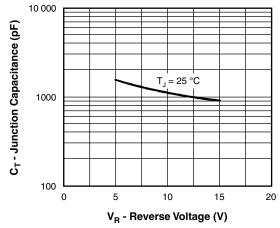



Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage (Per Leg)

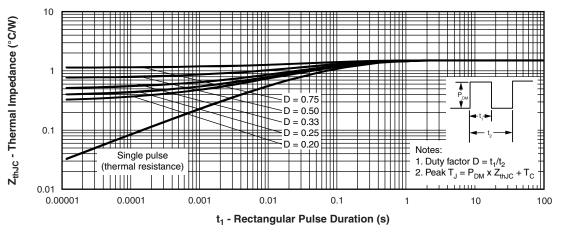




### 40L15CTPbF

### Vishay High Power Products Schottky Rectifier, 2 x 20 A

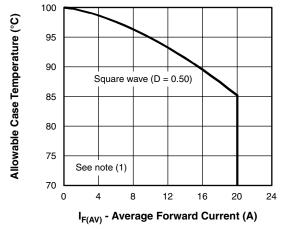



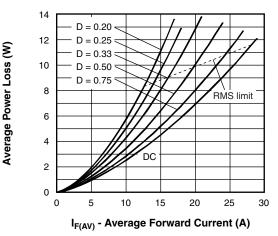


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

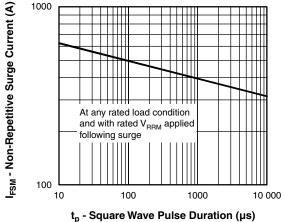


Fig. 7 - Maximum Non-Repetitive Surge Current (Per Leg)

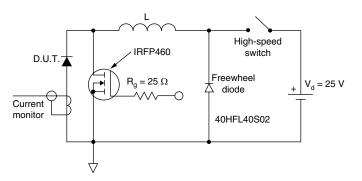


Fig. 8 - Unclamped Inductive Test Circuit


#### Note

<sup>(1)</sup> Formula used:  $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$ ;  $Pd = Forward power loss = I_{F(AV)} \times V_{FM} at (I_{F(AV)}/D)$  (see fig. 6);  $Pd_{REV} = Inverse power loss = V_{R1} \times I_R (1 - D); I_R at V_{R1} = 10 V$ 



Schottky Rectifier, 2 x 20 A Vishay High Power Products

#### ORDERING INFORMATION TABLE

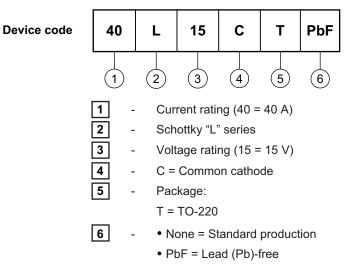

Tube standard pack quantity: 50 pieces

LINKS TO RELATED DOCUMENTS				
Dimensions http://www.vishay.com/doc?95222				
Part marking information	http://www.vishay.com/doc?95225			



Vishay

# Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.