
# MS-225 Cylindrical Proximity Sensor M5 threaded, Nickel plated Brass housing, 10 W

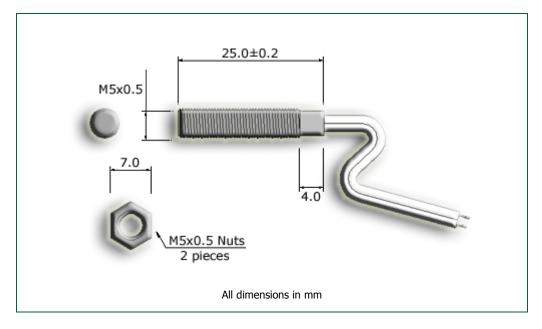

- Does not require power for operation
- Omni-polar device; actuates with either pole of magnet
- Normally open (NO) contact
- Three magnetic sensitivity bands
- 0.5 mm pitch threaded barrel for fine adjustment
- Lead (Pb) free and RoHS compliant

### **Applications**

This magnet sensor is suitable for use in the following applications and many others: coil winder tension sensing, digital speedometers and tachometers, anemometers, pneumatic cylinders and actuators...

Contact Form		A
Contact Rating (max)	W / VA	10
Switching Current (max)	A	0.5
Carry Current (max)	A	1.5
Switching Voltage (max)	V <sub>DC</sub>	180
Breakdown Voltage (min)	V <sub>DC</sub>	200
Initial Contact Resistance (max)	mΩ	150
Operating Temperature	°C	-40 to +70
Shock Resistance (1/2Sin wave for 11ms)	g	50
Vibration Resistance (10-2000Hz)	g	20

## IIII Ordering Code

MS-225-(Operate AT Code)-(Cable length in mm)-(Lead Code)						
OAT Code		Lead Code				
1	10 – 15	S	Stripped to 5mm			
2	15 – 20	Т	Stripped to 5mm and Tinned			
3	20 – 25	М	Molex Connector			

#### 💰 Example

MS-225-1-500-M denotes 10-15 Operate AT, with 500 mm cable length and Molex connectors.

Due to continual improvement, specifications are subject to change without notice www.reed-sensor.com

22 December 2006

## **MS-225 Cylindrical Proximity Sensor Actuation Distances**

Operate and release distances for the MS-225 M5 threaded proximity sensor, in two AT bands when actuated (as shown in the sketches) with NdFeB standard magnets is shown below. All distances given are in mm with tolerances of ±0.5mm. Although some of the AT band / magnet combinations will produce similar actuating distances, selecting the right AT band and magnet for an application is important and can be done by going through our AT band FAQ and our magnet selection guide.

NDR-T NDC-T NDR-S NDC-S NDR-M NDC-M NDR-L NDC-L	$\begin{array}{c} 4.0 \times 1.5 \times 1.5 \\ \hline \ensuremath{\varnothing}2.0 \times 4.0 \\ \hline 6.0 \times 2.5 \times 2.5 \\ \hline \ensuremath{\varnothing}3.0 \times 7.0 \\ \hline \ensuremath{\vartheta}8.0 \times 3.0 \times 3.0 \\ \hline \ensuremath{\varnothing}4.0 \times 10.0 \\ \hline \ensuremath{19.0} \times 4.0 \times 4.0 \\ \hline \ensuremath{\varnothing}8.0 \times 15.0 \end{array}$	N/A N/A 3.0 - 4.5 3.5 - 6.0 5.5 - 8.0 8.0 - 11.0 12.0 - 17.0	N/A N/A 5.0 - 5.5 5.5 - 7.0 8.0 - 9.0 11.0 - 13.0 16.0 - 19.0
NDR-S NDC-S NDR-M NDC-M NDR-L	6.0 x 2.5 x 2.5 Ø3.0 x 7.0 8.0 x 3.0 x 3.0 Ø4.0 x 10.0 19.0 x 4.0 x 4.0	3.0 - 4.5 3.5 - 6.0 5.5 - 8.0 8.0 - 11.0	5.0 - 5.5 5.5 - 7.0 8.0 - 9.0 11.0 - 13.0
NDC-S NDR-M NDC-M NDR-L	Ø3.0 x 7.0   8.0 x 3.0 x 3.0   Ø4.0 x 10.0   19.0 x 4.0 x 4.0	3.5 - 6.0 5.5 - 8.0 8.0 - 11.0	5.5 - 7.0 8.0 - 9.0 11.0 - 13.0
NDR-M NDC-M NDR-L	8.0 x 3.0 x 3.0 Ø4.0 x 10.0 19.0 x 4.0 x 4.0	5.5 - 8.0 8.0 - 11.0	8.0 - 9.0 11.0 - 13.0
NDC-M NDR-L	Ø4.0 x 10.0 19.0 x 4.0 x 4.0	8.0 - 11.0	11.0 - 13.0
NDR-L	19.0 x 4.0 x 4.0		
		12.0 - 17.0	16.0 - 19.0
NDC-L	Ø8.0 x 15.0		
	00.0 X 10.0	25.5 – 32.0	30.5 - 35.0
Magnet	Dimensions	Operate Distance	Release Distance
NDR-T	4.0 x 1.5 x 1.5	1.5 - 3.0	2.5 - 3.5
NDC-T	Ø2.0 x 4.0	2.0 - 4.0	3.0 – 5.0
NDR-S	6.0 x 2.5 x 2.5	7.0 - 9.0	9.0 - 10.0
NDC-S	Ø3.0 x 7.0	7.5 - 10.5	9.5 - 11.5
NDR-M	8.0 x 3.0 x 3.0	10.0 - 12.5	12.0 - 13.5
NDC-M	Ø4.0 x 10.0	13.5 - 17.0	16.0 - 18.0
NDR-L	19.0 x 4.0 x 4.0	19.0 - 22.0	22.0 - 24.0
NDC-L	Ø8.0 x 15.0	28.0 - 34.0	33.0 - 36.0
	NDR-T NDC-T NDR-S NDC-S NDR-M NDC-M NDR-L	NDR-T 4.0 x 1.5 x 1.5   NDC-T Ø2.0 x 4.0   NDR-S 6.0 x 2.5 x 2.5   NDC-S Ø3.0 x 7.0   NDR-M 8.0 x 3.0 x 3.0   NDC-M Ø4.0 x 10.0   NDR-L 19.0 x 4.0 x 4.0	NDR-T 4.0 x 1.5 x 1.5 1.5 - 3.0   NDC-T Ø2.0 x 4.0 2.0 - 4.0   NDR-S 6.0 x 2.5 x 2.5 7.0 - 9.0   NDC-S Ø3.0 x 7.0 7.5 - 10.5   NDR-M 8.0 x 3.0 x 3.0 10.0 - 12.5   NDC-M Ø4.0 x 10.0 13.5 - 17.0   NDR-L 19.0 x 4.0 x 4.0 19.0 - 22.0

	Actuation Sketch	Magnet	Dimensions	Operate Distance	Release Distance
ſ		NDR-T	4.0 x 1.5 x 1.5	N/A	N/A
		NDC-T	Ø2.0 x 4.0	N/A	N/A
		NDR-S	6.0 x 2.5 x 2.5	1.5 - 3.0	4.5 - 5.0
		NDC-S	Ø3.0 x 7.0	2.5 – 3.5	5.5 - 6.5
		NDR-M	8.0 x 3.0 x 3.0	4.5 – 5.5	7.5 – 8.5
		NDC-M	Ø4.0 x 10.0	7.5 – 8.0	11.0 - 11.5
		NDR-L	19.0 x 4.0 x 4.0	10.5 - 12.0	15.5 – 16.5
		NDC-L	Ø8.0 x 15.0	23.0 - 25.5	30.0 - 31.0
	Actuation Sketch	Magnet	Dimensions	Operate Distance	Release Distance
	S/N	NDR-T	4.0 x 1.5 x 1.5	1.0 - 1.5	2.0 - 2.5
		NDC-T	Ø2.0 x 4.0	1.5 – 2.0	2.5 – 3.0
		NDR-S	6.0 x 2.5 x 2.5	5.5 – 7.0	8.5 – 9.0
		NDC-S	Ø3.0 x 7.0	7.0 – 7.5	9.5 – 10.0
		NDR-M	8.0 x 3.0 x 3.0	9.5 - 10.0	11.5 – 12.0
		NDC-M	Ø4.0 x 10.0	12.0 - 13.5	15.0 - 16.0

Ø4.0 x 10.0 19.0 x 4.0 x 4.0

Ø8.0 x 15.0

NDR-L NDC-L 12.0 - 13.5 17.0 - 19.0

26.0 - 28.0

15.0 - 16.0 21.0 - 22.0

32.0 - 33.0

Due to continual improvement, specifications are subject to change without notice www.reed-sensor.com

10 February 2009