## **DI-8B47 Linearized Thermocouple Input Modules**

#### **FEATURES**

- Interfaces to Types J, K and T
- Linearizes Thermocouple Signal
- High Level Voltage Outputs
- 1500Vrms Transformer Isolation
- ANSI/IEEE C37.90.1
- Input Protected to 240VAC Continuous
- 120dB CMR
- 70dB NMR at 60Hz
- Low Drift with Ambient Temperature
- Accurate CJC -40°C to +85°C
- CSA, FM, and CE Certifications Pending
- Mix and Match Module Types

### DESCRIPTION

DI-8B modules are an optimal solution for monitoring real-world process signals and providing high level signals to a data acquisition system. Each DI-8B47 module isolates, filters, amplifies, and linearizes a single channel of temperature input from a thermocouple and provides an analog voltage output.

Linearization is accomplished using a four breakpoint piecewise linear approximation.

The DI-8B47 can interface to industry standard thermocouple type J, K, and T and has an output signal of 0V to +5V. Each module is cold-junction compensated to correct for parasitic thermocouples formed by the thermocouple wire and screw terminals on the mounting backpanel. Upscale open thermocouple detect is provided by an internal pull-up resistor.

Signal filtering is accomplished with a three-pole filter optimized for time and frequency response which provides 70dB of normal-mode-rejection at 60Hz. One pole of this filter is on the field side of the isolation barrier for anti-aliasing, and the other two are on the system side.

A special input circuit on the DI-8B47 module provides protection against accidental connection of power-line voltages up to 240VAC.

The modules are designed for installation in Class I, Division 2 hazardous locations and have a high level of immunity to environmental noise.


### **SPECIFICATIONS**

Typical at  $T_A = +25^{\circ}C$  and +5V Power

	DI-8B47	
Input Range	-0.1V to +0.5V	
Input Bias Current	-25nA	
Input Resistance		
Normal	$50 \mathrm{M}\Omega$	
Power Off Overload	450kΩ 450kΩ	
Input Protection	430822	
Continuous	240VAC	
Transient	ANSI/IEEE C37.90.1	
Sensor Excitation Current	0.25mA	
Lead Resistance Effect	±0.02°C/Ω¹	
CMV, Input to Output	1500Vrms max	
Transient, Input to Output	ANSI/IEEE C37.90.1	
CMR (50Hz or 60Hz)	120dB	
NMR	70dB at 60Hz	
Accuracy	See Ordering Information on Page 2	
Stability		
Offset	±20ppm/°C	
Gain	±75ppm/°C	
Noise Output, 100kHz	250μVrms	
Bandwidth, -3dB	3Hz	
Response Time, 90% Span	150ms	
Output Range	0 to +5V	
Output Protection	Continuous Short to Ground	
Transient	ANSI/IEEE C37.90.1	
Cold Junction Compensation		
Accuracy, 25°C	±0.5°C	
Accuracy, -40°C to +85°C	±1.5°C	
Power Supply Voltage	+5VDC ±5%	
Power Supply Current	30mA	
Power Supply Sensitivity	±25ppm/%	
Mechanical Dimensions	$1.11" \times 1.65" \times 0.40"$ (28.1mm × 41.9mm × 10.2mm)	
Environmental	(20.111111 ^ 71.711111 ^ 10.211111)	
Operating Temperature	-40°C to +85°C	
Storage Temperature	-40°C to +85°C	
Relative Humidity	0 to 95% Noncondensing	

# **DI-8B47 Linearized Thermocouple Input Module**

### **Block Diagram**

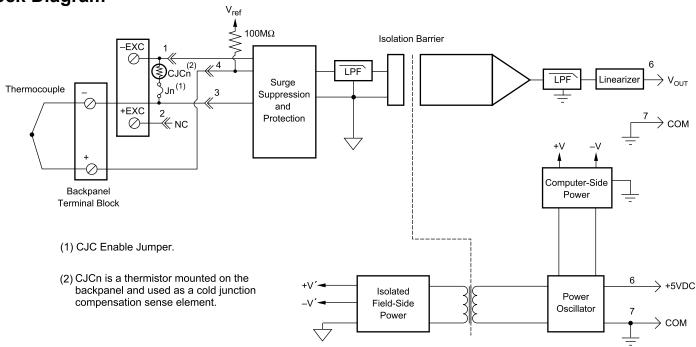

## **Ordering Information**

Model Number	TC Type	Input Range	Accuracy*
DI-8B47J-01	J	0°C to +760°C (+32°F to +1400°F)	±0.24% ±1.82°C
DI-8B47J-02	J	-100°C to +300°C (-148°F to +572°F)	±0.24% ±0.96°C
DI-8B47J-03	J	0°C to +500°C (+32°F to +932°F)	±0.21% ±1.05°C
DI-8B47J-12	J	-100°C to +760°C (-148°F to +1400°F)	±0.24% ±2.10°C
DI-8B47K-04	K	0°C to +1000°C (+32°F to +1832°F)	±0.24% ±2.40°C
DI-8B47K-05	K	0°C to +500°C (+32°F to +932°F)	±0.24% ±1.05°C
DI-8B47K-13	K	-100°C to +1350°C (-148°F to +2462°F)	±0.24% ±3.60°C
DI-8B47K-14	K	0°C to +1200°C (+32°F to +2192°F)	±0.24% ±2.88°C
DI-8B47T-06	Т	-100°C to +400°C (+32°F to +392°F)	±0.48% ±2.40°C
DI-8B47T-07	Т	0°C to +200°C (+32°F to +392°F)	±0.39% ±0.75°C
* Includes conformity, hysteresis, and repeatability. Does not include CJC Accuracy.			



241 Springside Drive Akron, Ohio 44333 330-668-1444

### **Data Acquisition Product Links**

(click on text to jump to page)