# **ADAM-6060 ADAM-6066**

# 6-ch Digital Input and 6-ch Relay Module

## 6-ch Digital Input and 6-ch Power Relay Module





## **Specifications**

#### General

- LAN **Power Consumption**  10/100Base-T(X) 2 W @ 24 V<sub>DC</sub> (ADAM-6060)

**Connectors** 

2.5 W @ 24 V<sub>DC</sub> (ADAM-6066) 1 x RJ-45 (LAN), Plug-in screw terminal block (I/O and power) System (1.6 second) and Communication (programmable)

**Watchdog Timer** Power Input 10 ~ 30 Vnc Supports Peer-to-Peer

Supports GCL

Supports Modbus/TCP, TCP/IP, UDP and HTTP Protocols

#### **Digital Input**

Channels

**Dry Contact** Logic level 0: close to GND Logic level 1: open Wet Contact Logic level 0 ~ 3 V<sub>DC</sub> Logic level 1: 10 ~ 30 V<sub>D</sub>

Supports 3 kHz Counter Input (32-bit + 1-bit overflow)

Keep/Discard Counter Value when Power-off

Supports 3 kHz Frequency Input

Supports Inverted DI Status

#### **Relay Output (Form A)**

Channels

Contact Rating (Resistive) ADAM-6060: 120 V @ 0.5 A (AC)

30 V @ 1 A (DC) ADAM-6066: 250 V @ 5 A (AC) 30 V @ 5 A (DC)

Breakdown Voltage

500 V<sub>AC</sub> (50/60 Hz) 7 ms

Relay On Time

10 ms

Relay Off Time **Total Switching Time** 

1 G $\Omega$  min. at 500 V<sub>DC</sub> Insulation Resistance Maximum Switching 20 operations/minute

Rate (at rated load)

Supports Pulse Output

# **Protection**

**Power Reversal Protection** 

Isolation Voltage 2,000 V<sub>DC</sub>

#### **Environment**

**Operating Temperature** 

-10 ~ 70° C

Storage Temperature


-20 ~ 80° C

Humidity (Operating) Humidity (Storage)

20 ~ 95% RH (non-condensing) 0 ~ 95% RH (non-condensing)

# **Ordering Information**

ADAM-6060 6-ch DI and 6-ch Relay Module ADAM-6066 6-ch DI and 6-ch Power Relay Module

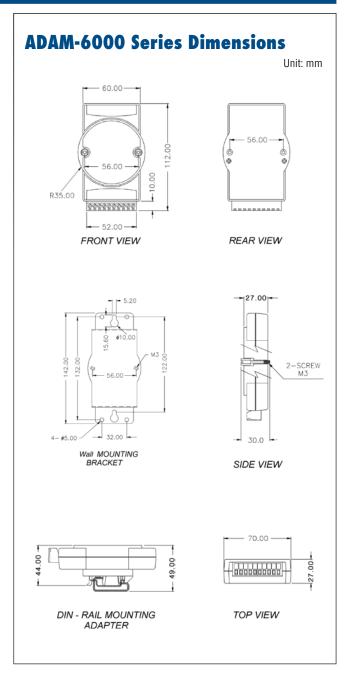

## ADAM-6000 I/O Module Common **Specifications**

#### General

**Dimension (W x H x D)** 70 x 120 x 30 mm

 Enclosure ABS+PC

Mounting DIN 35 rail, stack, wall