

PHOTOCOUPLER PS9611L

HIGH NOISE REDUCTION, HIGH-SPEED 10 Mbps TOTEM POLE OUTPUT TYPE 8-PIN DIP PHOTOCOUPLER

-NEPOC Series-

DESCRIPTION

The PS9611 and PS9611L are optically coupled high-speed, totem pole output isolators containing a GaAlAs LED on the input side and a photodiode and a signal processing circuit on the output side on one chip.

The PS9611 is in a plastic DIP (Dual In-line Package) and the PS9611L is lead bending type (Gull-wing) for surface mounting.

FEATURES

- High common mode transient immunity (CMH, CML = $\pm 10 \text{ kV/}\mu\text{s}$ TYP.)
- High-speed response (tphL = 30 ns TYP., tpLH = 35 ns TYP.)
- Pulse width distortion (| tphl tplh | = 5 ns TYP.)
- Totem pole output (No pull-up resistor required)
- Ordering number of tape product: PS9611L-E3, E4: 1 000 pcs/reel
- Safety standards
 - UL approved: File No. E72422 (S)
 - VDE0884 approved (Option): No.91877


APPLICATIONS

- · Computer and peripheral manufactures
- · Measurement equipment
- PDP


The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

★ PACKAGE DIMENSIONS (UNIT: mm)


DIP Type

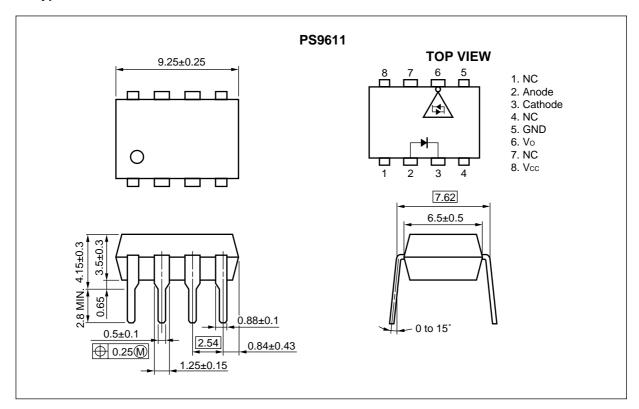


Lead Bending Type

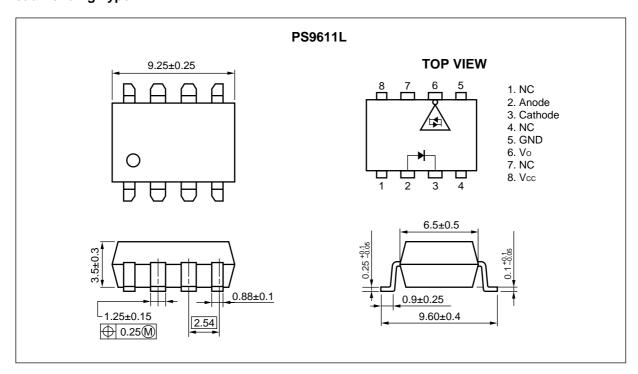

INTERNAL OUTPUT CIRCUIT

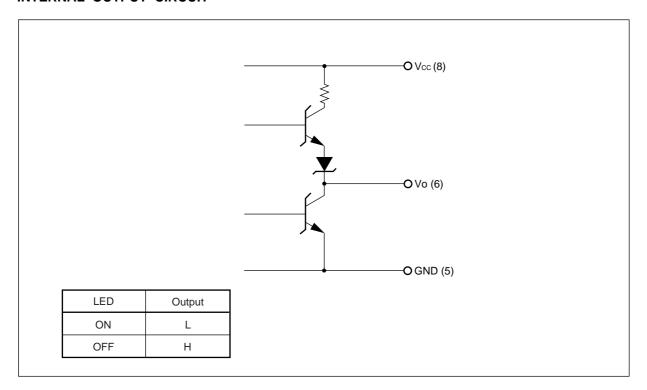

MARKING EXAMPLE

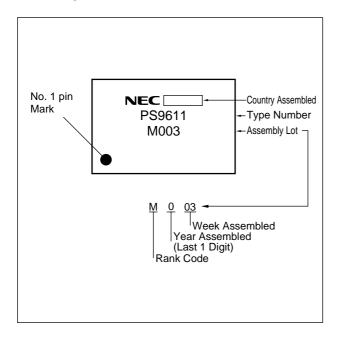

ORDERING INFORMATION (Solder Contains Lead)

Part Number	Package	Packing Style	Safety Standards Approval	Application Part Number*1
PS9611	8-pin DIP	Magazine case 50 pcs	Approved products	PS9611
PS9611L			other than VDE	PS9611L
PS9611L-E3		Embossed Tape 1 000 pcs/reel		
PS9611L-E4				
PS9611-V		Magazine case 50 pcs	VDE0884 approved	PS9611
PS9611L-V			(Option)	PS9611L
PS9611L-V-E3		Embossed Tape 1 000 pcs/reel		
PS9611L-V-E4				

^{*1} For the application of the Safety Standard, following part number should be used.

ORDERING INFORMATION (Pb-Free)

Part Number	Package	Packing Style	Safety Standards Approval	Application Part Number*1
PS9611-A	8-pin DIP	Magazine case 50 pcs	Approved products	PS9611
PS9611L-A			other than VDE	PS9611L
PS9611L-E3-A		Embossed Tape 1 000 pcs/reel		
PS9611L-E4-A				
PS9611-V-A		Magazine case 50 pcs	VDE0884 approved	PS9611
PS9611L-V-A			(Option)	PS9611L
PS9611L-V-E3-A		Embossed Tape 1 000 pcs/reel		
PS9611L-V-E4-A				

^{*1} For the application of the Safety Standard, following part number should be used.

ABSOLUTE MAXIMUM RATINGS (TA = 25°C, unless otherwise specified)

Parameter		Symbol	Ratings	Unit
Diode	Forward Current	lF	30	mA
	Reverse Voltage	VR	3.0	V
Detector	Supply Voltage	Vcc	7	V
	Output Voltage		7	V
	High Level Output Current*1	Іон	- 5	mA
	Low Level Output Current*1	lol	25	mA
	Power Dissipation*1, 2	Pc	150	mW
Isolation Voltage*3		BV	3 750	Vr.m.s.
Operating Ambient Temperature		TA	-40 to +85	°C
Storage Temperature		T _{stg}	-55 to +125	°C

^{*1} T_A = -40 to +85°C

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
High Level Input Current	Іғн	7.5		12.5	mA
Low Level Input Current	IFL	0		250	μА
Supply Voltage	Vcc	4.5	5.0	5.5	V
TTL (loads)	N			5	


^{*2} Applies to output pin Vo and power supply pin Vcc.

^{*3} AC voltage for 1 minute at $T_A = 25$ °C, RH = 60% between input and output.

ELECTRICAL CHARACTERISTICS (T_A = -40 to +85°C, unless otherwise specified)


Parameter		Symbol	Conditions		MIN.	TYP.*1	MAX.	Unit
Diode	Forward Voltage	VF	I _F = 10 mA, T _A = 25°C		1.4	1.65	1.9	V
	Reverse Current	lR	VR = 3 V, TA = 25°C				10	μΑ
	Terminal Capacitance	Ct	V = 0 V, f = 1 MHz,	V = 0 V, f = 1 MHz, T _A = 25°C		30		pF
Detector	High Level Output Current	Іон	Vcc = Vo = 5.5 V, In	= 250 μA		1	200	μА
	High Level Output Voltage	Vон	Vcc = 4.5 V, I _F = 25	$0 \mu A$, Iон = -2 mA	2.4	3.0		V
	Low Level Output Voltage	Vol	Vcc = 4.5 V, I _F = 7 r	mA, IoL = 8 mA		0.38	0.6	V
	High Level Supply Current	Іссн	Vcc = 5.5 V, I _F = 0 r	mA		11	17	mA
	Low Level Supply Current	Iccl	Vcc = 5.5 V, I _F = 10	mA		12	18	mA
	High Level Output Short Circuit Current	Іоѕн	Vcc = 5.5 V, Vo = G 10 ms or less	BND, IF = 0 mA,		-26		mA
	Low Level Output Short Circuit Current	losL	Vcc = Vo = 5.5 V, I _F 10 ms or less	= 8 mA,		34		mA
Coupled	Threshold Input Current	IFHL	Vcc = 5 V	T _A = 25°C		2.7	5	mA
	$(H \rightarrow L)$						6]
	Threshold Input Current	IFLH	Vcc = 5 V	T _A = 25°C	0.5			mA
	$(L \rightarrow H)$				0.35			
	Isolation Resistance	R _{I-O}	V _{I-O} = 1 kV _{DC} , RH = T _A = 25°C	40 to 60%,	10 ¹¹			Ω
	Isolation Capacitance	Cı-o	V = 0 V, f = 1 MHz,	T _A = 25°C		0.9		pF
	Propagation Delay Time	tрнL		T _A = 25°C	15	30	65	ns
	$(H \rightarrow L)^{*2}$		Vcc = 5 V, I _F = 7.5 r	mA	10		85]
	Propagation Delay Time	tрын		T _A = 25°C	15	35	65	ns
	$(L \rightarrow H)^{*2}$		Vcc = 5 V, I _F = 7.5 r	mA	10		85	1
	Pulse Width Distortion (PWD)*2	tphl-tplh	Vcc = 5 V, I _F = 7.5 mA			5	35	ns
	Common Mode Transient Immunity at High Level Output*3	СМн	Vcc = 5 V, TA = 25°C, IF = 0 mA, Vo (MIN.) = 2 V, VcM = 100 V		1	10		kV/μs
	Common Mode Transient Immunity at Low Level Output ¹³	CM∟	Vcc = 5 V, Ta = 25°C, I _F = 7.5 mA, Vo (MAX.) = 0.8 V, VcM = 100 V		1	10		kV/μs

- *1 Typical values at T_A = 25°C
- *2 Test circuit for propagation delay time

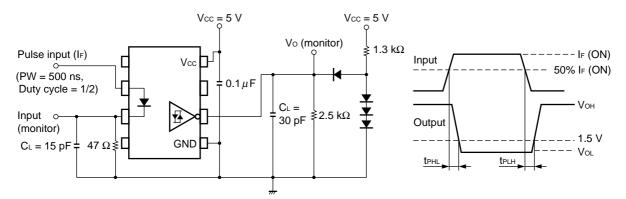

CL includes probe and stray wiring capacitance.

*3 Test circuit for common mode transient immunity

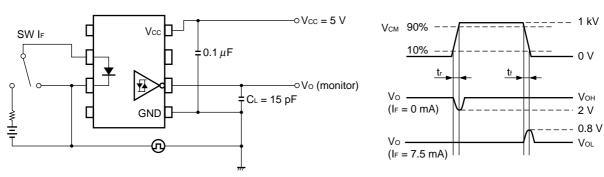


CL includes probe and stray wiring capacitance.


USAGE CAUTIONS

- 1. This product is weak for static electricity by designed with high-speed integrated circuit so protect against static electricity when handling.
- 2. By-pass capacitor of more than 0.1 μ F is used between Vcc and GND near device. Also, ensure that the distance between the leads of the photocoupler and capacitor is no more than 10 mm.
- ★ 3. Avoid storage at a high temperature and high humidity.


TYPICAL CHARACTERISTICS (TA = 25°C, unless otherwise specified)

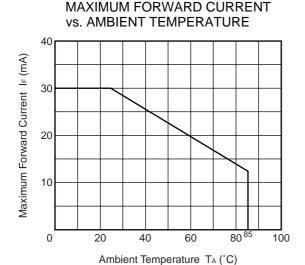


FORWARD CURRENT vs. FORWARD VOLTAGE

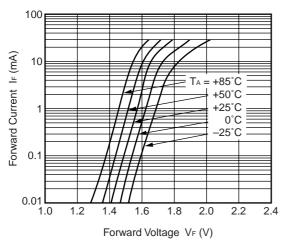


HIGH LEVEL OUTPUT VOLTAGE vs. HIGH LEVEL OUTPUT CURRENT

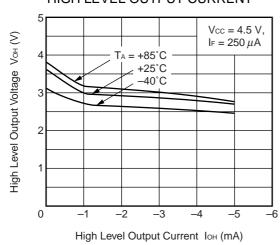


DETECTOR POWER DISSIPATION vs. AMBIENT TEMPERATURE

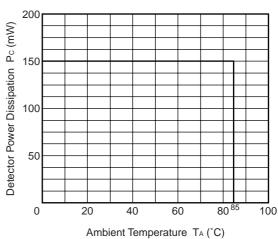


SUPPLY CURRENT vs. AMBIENT TEMPERATURE

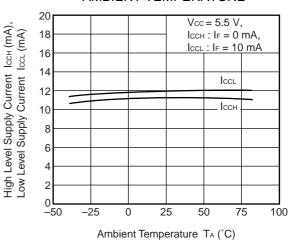


HIGH LEVEL OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE

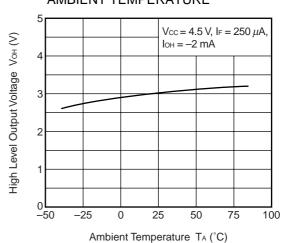


LOW LEVEL OUTPUT VOLTAGE vs. LOW LEVEL OUTPUT CURRENT

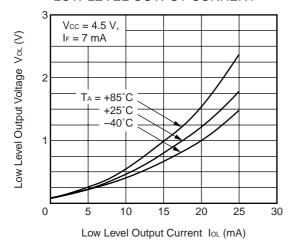

PROPAGATION DELAY TIME, PULSE WIDTH DISTORTION vs. FORWARD CURRENT

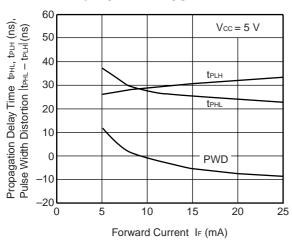


THRESHOLD INPUT CURRENT vs. AMBIENT TEMPERATURE

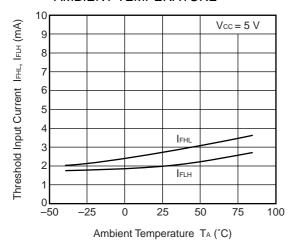


Remark The graphs indicate nominal characteristics.


LOW LEVEL OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE

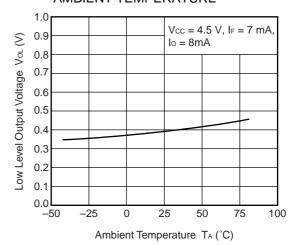

PROPAGATION DELAY TIME, PULSE WIDTH DISTORTION vs. AMBIENT TEMPERATURE

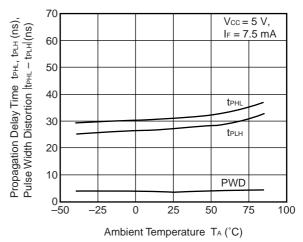

★ TAPING SPECIFICATIONS (UNIT: mm)

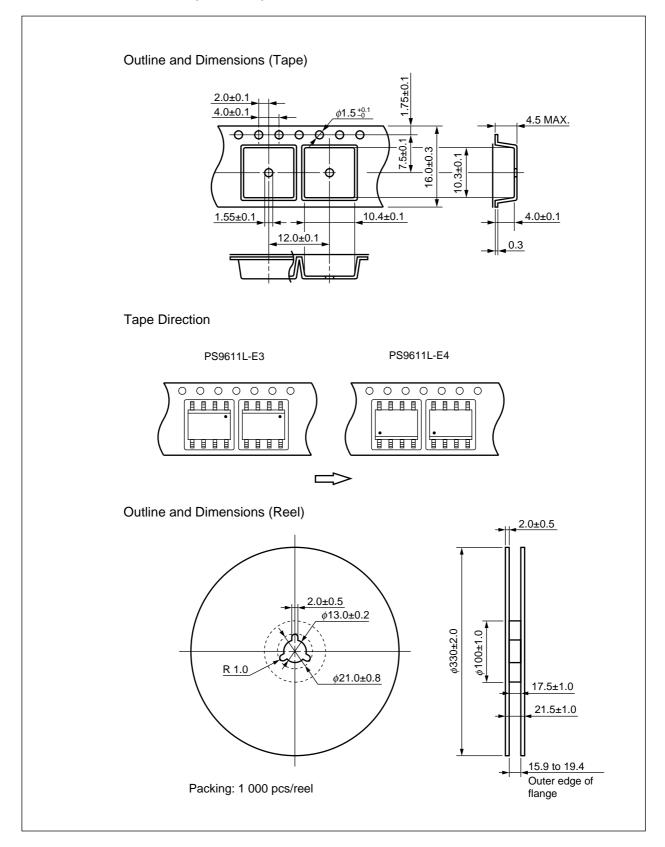

NOTES ON HANDLING

1. Recommended soldering conditions

(1) Infrared reflow soldering

• Peak reflow temperature 260°C or below (package surface temperature)


• Time of peak reflow temperature 10 seconds or less • Time of temperature higher than 220°C 60 seconds or less

• Time to preheat temperature from 120 to 180°C 120±30 s · Number of reflows Three

• Flux Rosin flux containing small amount of chlorine (The flux with a

maximum chlorine content of 0.2 Wt% is recommended.)

Recommended Temperature Profile of Infrared Reflow

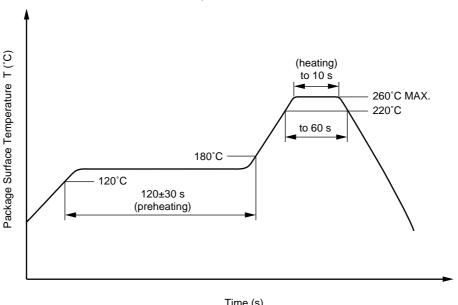

Time (s)

(2) Wave soldering

• Temperature 260°C or below (molten solder temperature)

• Time 10 seconds or less

· Preheating conditions 120°C or below (package surface temperature)

· Number of times One (Allowed to be dipped in solder including plastic mold portion.)

• Flux Rosin flux containing small amount of chlorine (The flux with a maximum chlorine

content of 0.2 Wt% is recommended.)

(3) Cautions

Fluxes

Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.

2. Cautions regarding noise

Be aware that when voltage is applied suddenly between the photocoupler's input and output or between collector-emitters at startup, the output side may enter the on state, even if the voltage is within the absolute maximum ratings.



4590 Patrick Henry Drive Santa Clara, CA 95054-1817 Telephone: (408) 919-2500

Facsimile: (408) 988-0279

Subject: Compliance with EU Directives

CEL certifies, to its knowledge, that semiconductor and laser products detailed below are compliant with the requirements of European Union (EU) Directive 2002/95/EC Restriction on Use of Hazardous Substances in electrical and electronic equipment (RoHS) and the requirements of EU Directive 2003/11/EC Restriction on Penta and Octa BDE.

CEL Pb-free products have the same base part number with a suffix added. The suffix –A indicates that the device is Pb-free. The -AZ suffix is used to designate devices containing Pb which are exempted from the requirement of RoHS directive (*). In all cases the devices have Pb-free terminals. All devices with these suffixes meet the requirements of the RoHS directive.

This status is based on CEL's understanding of the EU Directives and knowledge of the materials that go into its products as of the date of disclosure of this information.

Restricted Substance per RoHS	Concentration Limit per RoHS (values are not yet fixed)	Concentration contained in CEL devices		
Lead (Pb)	< 1000 PPM	-A Not Detected	-AZ (*)	
Mercury	< 1000 PPM	Not Detected		
Cadmium	< 100 PPM	Not Detected		
Hexavalent Chromium	< 1000 PPM	Not Detected		
PBB	< 1000 PPM	Not Detected		
PBDE	< 1000 PPM	Not Detected		

If you should have any additional questions regarding our devices and compliance to environmental standards, please do not hesitate to contact your local representative.

Important Information and Disclaimer: Information provided by CEL on its website or in other communications concerting the substance content of its products represents knowledge and belief as of the date that it is provided. CEL bases its knowledge and belief on information provided by third parties and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. CEL has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. CEL and CEL suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall CEL's liability arising out of such information exceed the total purchase price of the CEL part(s) at issue sold by CEL to customer on an annual basis.

See CEL Terms and Conditions for additional clarification of warranties and liability.