EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

Technical Data Sheet

1.8mm round Subminiature Chip LED

Features

- Package in 12mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

Descriptions

- The 42-21A SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications, etc.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

	Cl		
Part No.	Material	Emitted Color	Lens Color
42-21A/GHC-YX1Y2N/1T	InGaN	Brilliant Green	Water Clear


http://www.everlight.com

Prepared date: 11-Apr-2007


Release Date:2008-09-20 00:15:56.0



42-21A/GHC-YX1Y2N/1T



Package Outline Dimensions

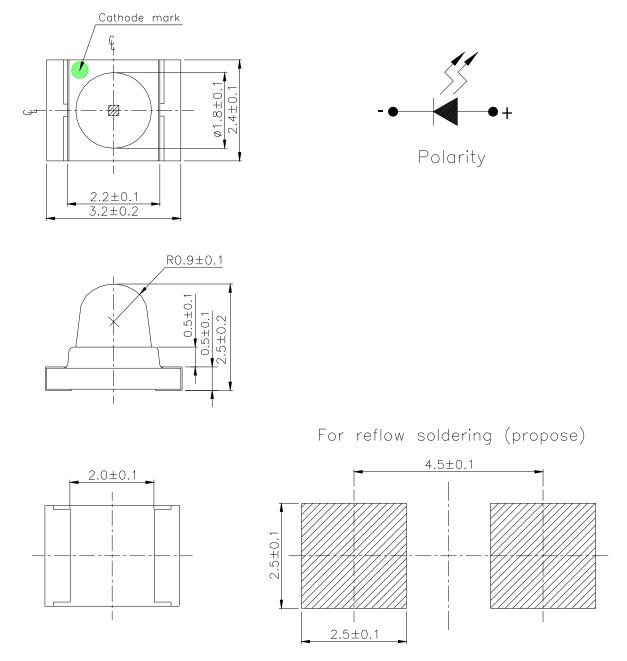

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No. : DSE-42A-G04 Revision : 1 LifecyclePhase:正式發行 http://www.everlight.com Rev. 1 Page: 2 of 10 Prepared date: 11-Apr-2007 Prepared by: Esther Yan Release Date:2008-09-20 00:15:56.0

EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

42-21A/GHC-YX1Y2N/1T

Absolute Maximum Ratings (Ta=25)

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	$\mathbf{I}_{\mathbf{F}}$	25	mA
Peak Forward Current (Duty 1/10 @1KHz)	IFP	100	mA
Power Dissipation	Pd	110	mW
Electrostatic Discharge(HBM)	ESD	150	V
Operating Temperature	Topr	-40 ~ +85	
Storage Temperature	Tstg	-40 ~ +90	
Soldering Temperature	Tsol	Reflow Soldering : 260 Hand Soldering : 350	for 10 sec. for 3 sec.

					0		
Electro-Optical Characteristics (Ta=25)							
Parameter	Symbol	Min.	Тур.	Max.	<mark>U</mark> nit	Condition	
Luminous Intensity	Iv	1800		4500	mcd		
Viewing Angle	2 1/2		30		deg]	
Peak Wavelength	р		518		nm		
Dominant Wavelength	d	520		535	nm	IF=20mA	
Spectrum Ra <mark>di</mark> ation Bandwidth	U,		35		nm		
Forward Voltage	VF	2.7		3.7	V		
Reverse Current	Ir			50	μA	Vr=5V	

Notes:

1.Tolerance of Luminous Intensity ±11% 2.Tolerance of Dominant Wavelength ±1nm 3.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. Device No. : DSE-42A-G04 Revision :1 LifecyclePhase:正式發行

http://www.everlight.com Rev. 1 Page: 3 of 10 Prepared date: 11-Apr-2007 Prepared by: Esther Yan Release Date:2008-09-20 00:15:56.0

EVERLIGHT ELECTRONICS CO.,LTD.

42-21A/GHC-YX1Y2N/1T

Bin Range Of Dom. Wavelength

EVERLIGHT

Group	Bin	Min	Max	Unit	Condition
	X	520	525		
Y	Y	525	530	nm	IF=20mA
	Z	530	535		

Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition	
X1	1800	2250	mcd		
X2	2250	2850		IF=20mA	
Y1	2850	3600			
Y2	3600	4500			

Bin Range Of Forward Voltage

Group	Bin	Min	Max	Unit	Condition	
	10	2.70	2.90			
	11	2.90	3.10		A	
Ν	12	3.10	3.30	V	IF=20mA	
	13	3.30	3.50			
	14	3.50	3.70			

Notes:

1.Tolerance of Luminous Intensity ±11%


2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.1V

Page: 4 of 10

Rev. 1

Typical Electro-Optical Characteristics Curves

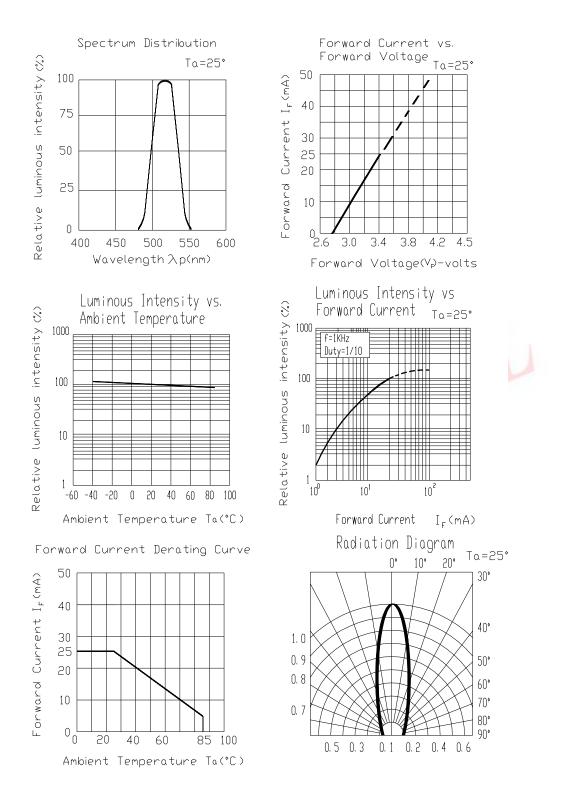


Everlight Electronics Co., Ltd. Device No. : DSE-42A-G04 Revision : 1 LifecyclePhase:正式發行 http://www.everlight.com Rev. 1 Page: 5 of 10 Prepared date: 11-Apr-2007 Prepared by: Esther Yan Release Date:2008-09-20 00:15:56.0

EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.


42-21A/GHC-YX1Y2N/1T

Label explanation

- **CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**

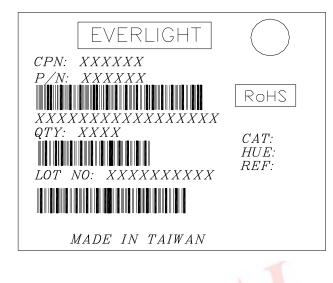


Reel Dimensions

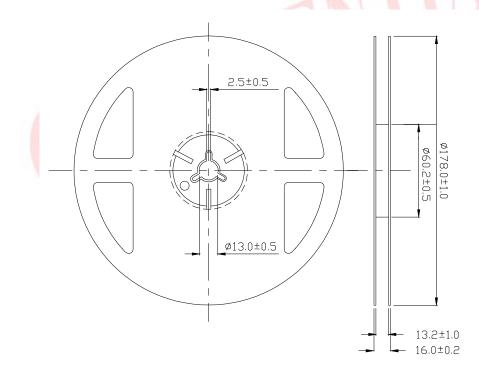

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No. : DSE-42A-G04 Revision : 1 LifecyclePhase:正式發行 http://www.everlight.com Rev. 1 Page: 6 of 10 Prepared date: 11-Apr-2007 Prepared by: Esther Yan Release Date:2008-09-20 00:15:56.0

Carrier Tape Dimensions: Loaded quantity 1000 PCS per reel

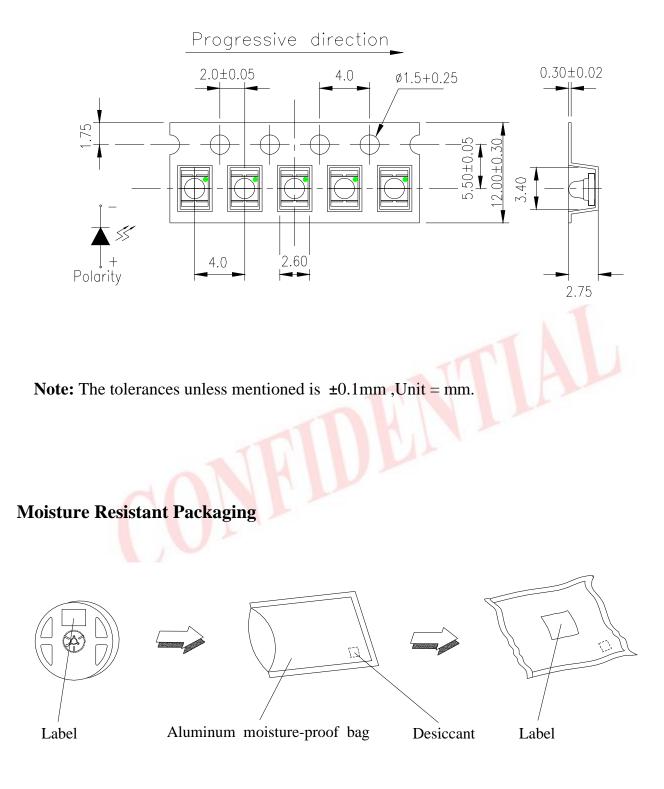

Everlight Electronics Co., Ltd. Device No. : DSE-42A-G04 Revision : 1 LifecyclePhase:正式發行 http://www.everlight.com Rev. 1 Page: 7 of 10 Prepared date: 11-Apr-2007 Prepared by: Esther Yan Release Date:2008-09-20 00:15:56.0

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below. Confidence level : 90% LTPD : 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260 ±5 Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100 15min 5 min L : -40 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100 5min 10 sec L : -10 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85 / 85%RH	1000 Hrs.	22 PCS.	0/1
		A			

Prepared date: 11-Apr-2007 Prepared by: Esther Yan Release Date:2008-09-20 00:15:56.0


Rev. 1

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30 or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 or less and 60% RH or less.If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.Baking treatment : 60±5 for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

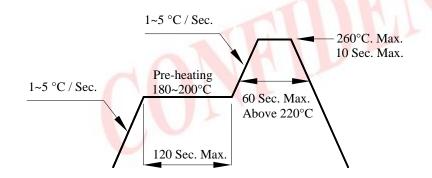

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.


http://www.everlight.com Rev. 1 Page: 9 of 10 Prepared date: 11-Apr-2007 Prepared by: Esther Yan Release Date:2008-09-20 00:15:56.0

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

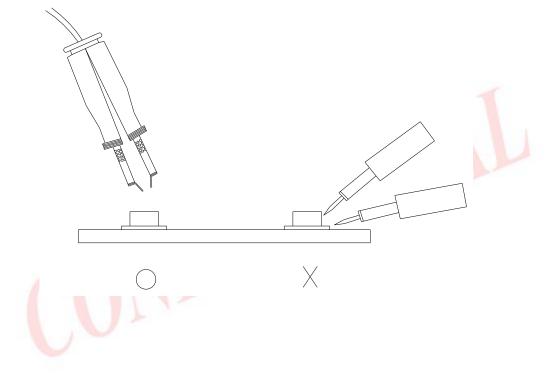

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936 Fax: 886-2267-6244, 2267-6189, 2267-6306 http://www.everlight.com

Everlight Electronics Co., Ltd. Device No. : DSE-42A-G04 Revision :1 LifecyclePhase:正式發行

http://www.everlight.com Rev. 1

Page: 10 of 10

Prepared date: 11-Apr-2007

Prepared by: Esther Yan Release Date:2008-09-20 00:15:56.0