


MARBO ADAPTORS.

Farnell
Technical
Data
Service

Order Code 108-085, 108-086

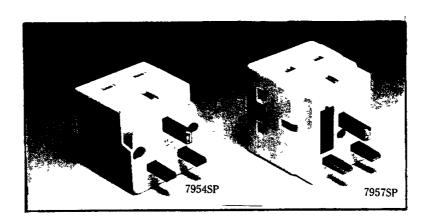

<u>List No.</u>	Description.	Farnell Code.
7954.	13 Amp 2 way unfused adaptor. Sleeved pins.	F.E.C. 108 - 085
7957.	13 Amp 3 way fused adaptor. Sleeved pins.	F.E.C. 108 - 086

Mouldings manufactured from Thermo-set Urea material to BS.1322. Pins machined in solid brass and fitted with moulded-on nylon insulating sleeves. All current carrying parts are manufactured from brass and phosphor bronze. All pin apertures are spring shuttered. All adaptors are manufactured in accordance with BS.5733 (Including amendments 1 and 2) and fused adaptors are fitted with an ASTA approved 13 Amp fuse complying with BS.1362. Socket outlets are designed to accept BS.1363 type plugs.

OVERALL DIMENSIONS:-

2 way unfused - $52,0 \times 50,5 \times 50,5 \text{ mm}$. (Excluding pins).

3 way fused - $56,0 \times 52,0 \times 58,5 \text{ mm.}$ (Excluding pins).