## **Technical Data Sheet**

# **Chip LED with Right Angle Lens**

## 12-21/R8C-AN1P2B/2D

#### **Features**

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS complaint version.

### **Descriptions**

- The 12-21 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

#### **Applications**

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.


#### **Device Selection Guide**

Dout No.	Chip	Emitted Color	Resin Color	
Part No.	Material	Limited Color		
12-21/R8C-AN1P2B/2D	AlGaInP	Deep-Red	Water Clear	



## 12-21/R8C-AP1Q2B/2D

# **Package Outline Dimensions**

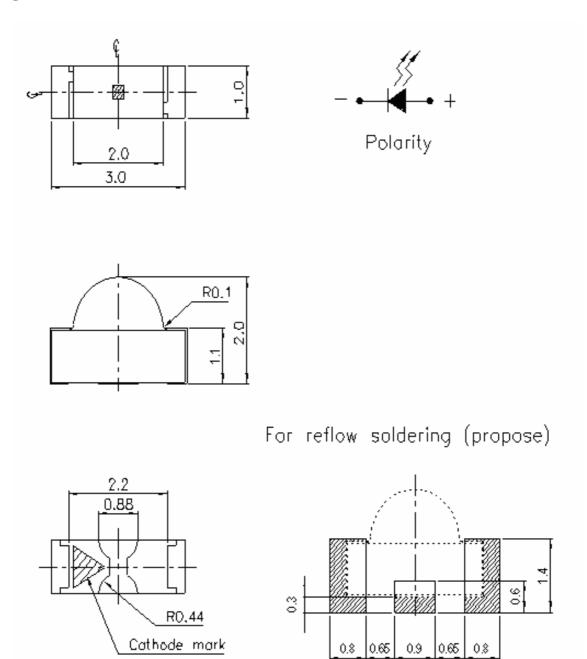

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd. Device No. :DSE-0003914

http://www.everlight.com

Prepared date: 17-July-2010

Rev. 1

Page: 2 of 10



# EVERLIGHT ELECTRONICS CO.,LTD.

# 12-21/R8C-AN1P2B/2D

# **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit
Reverse Voltage	$V_R$	5	V
Forward Current	$I_{\mathrm{F}}$	25	mA
Peak Forward Current (Duty 1/10 @1KHz)	$ m I_{FP}$	60	mA
Power Dissipation	$P_d$	60	mW
ElectrostaticDischarge(HBM)	ESD	2000	V
Operating Temperature	Topr	-40 ~ +85	$^{\circ}$
Storage Temperature	Tstg	-40~ +90	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	Reflow Soldering:260°C for 10 sec Hand Soldering:350°C for 3 sec	

# **Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	$I_{V}$	28.5		72.0	mcd	
Viewing Angle	$2 heta_{1/2}$		120		deg	
Peak Wavelength	$\lambda_{ m p}$		650		nm	
Dominant Wavelength	$\lambda_{ m d}$	629.5		645.5	nm	I <sub>F</sub> =20mA
Spectrum Radiation Bandwidth	Δλ		20		nm	
Forward Voltage	$V_{\mathrm{F}}$	1.75		2.35	V	
Reverse Current	$I_R$			10	μΑ	$V_R=5V$

#### **Notes:**

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Dominant Wavelength ±1nm

3. Tolerance of Forward Voltage: ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 3 of 10 Device No.:DSE-0003914 Prepared date: 17-July-2010 Prepared by:Yang yuanyuan



# EVERLIGHT ELECTRONICS CO.,LTD.

## 12-21/R8C-AN1P2B/2D

### **Bin Range Of Luminous Intensity**

Bin	Min	Max	Unit	Condition	
N1	28.5	36.0	mcd		
N2	36.0	45.0		I <sub>F</sub> =20mA	
P1	45.0	57.0			
P2	57.0	72.0			

## Bin Range Of Dom. Wavelength

Groups	Bin	Min	Max	Unit	Condition
A	E7	629.5	633.5	nm	IF=20mA
	E8	633.5	637.5		
	E9	637.5	641.5		
	E10	641.5	645.5		

#### **Bin Rang Of Forward Voltage**

		0			
Groups	Bin	Min	Max	Unit	Condition
	0	1.75	1.95		
В	1	1.95	2.15	V	IF=20mA
	2	2.15	2.35		

#### **Notes:**


1. Tolerance of Luminous Intensity ±11%


2.Tolerance of Dominant Wavelength ±1nm


3. Tolerance of Forward Voltage ±0.1V


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 4 of 10 Device No.:DSE-0003914 Prepared date: 17-July-2010 Prepared by:Yang yuanyuan


#### **Typical Electro-Optical Characteristics Curves**














Everlight Electronics Co., Ltd.

Device No. :DSE-0003914

http://www.everlight.com Prepared date: 17-July-2010 Rev. 1

Page: 5 of 10

## Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 



#### **Reel Dimensions**

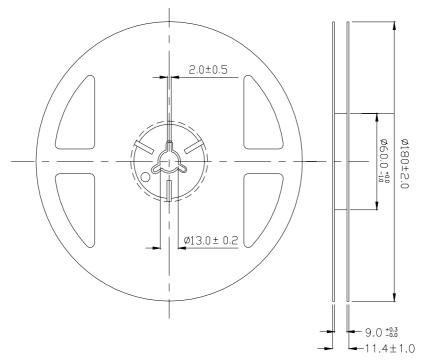

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd. Device No.: DSE-0003914

http://www.everlight.com


Prepared date: 17-July-2010

Rev. 1

Page: 6 of 10




## Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

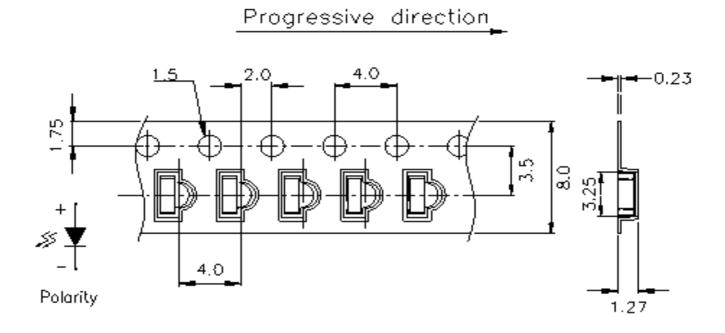

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

## **Moisture Resistant Packaging**

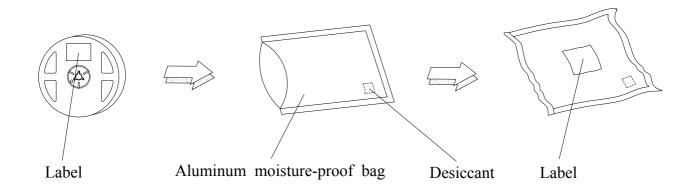

Everlight Electronics Co., Ltd. Device No.: DSE-0003914

http://www.everlight.com

Prepared date: 17-July-2010

Rev. 1 Page: 7 of 10



# EVERLIGHT ELECTRONICS CO.,LTD.

# 12-21/R8C-AN1P2B/2D

# **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90 %

LTPD: 10 %


No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Rc
1	Reflow Soldering	Temp. : 260°C±5°C Min5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H: $+100^{\circ}$ C 15min $\int$ 5 min L: $-40^{\circ}$ C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min  ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85% RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 8 of 10 Device No.:DSE-0003914 Prepared date: 17-July-2010 Prepared by:Yang yuanyuan



#### **Precautions For Use**

- 1. Over-current-proof
  Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).
- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
  - 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
  - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
  - 3.1 Pb-free solder temperature profile

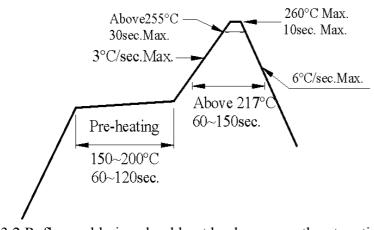

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 9 of 10 Device No.:DSE-0003914 Prepared date: 17-July-2010 Prepared by:Yang yuanyuan




#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

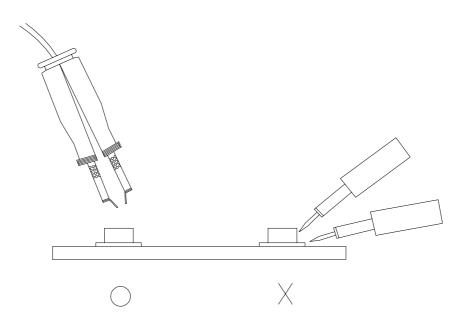

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 10 of 10 Device No.:DSE-0003914 Prepared date: 17-July-2010 Prepared by:Yang yuanyuan