

## CMM0014-BD

2.0 to 22.0 GHz GaAs MMIC Power Amplifer

Mimix Broadband, Inc. 10795 Rockley Rd., Houston, Texas 77099 Tel: 281.988.4600 Fax: 281.988.4615 www.mimixbroadband.com ©2005 Mimix Broadband, Inc.



# **CMM0014-BD**


## 2.0 to 22.0 GHz GaAs MMIC Power Amplifier

## Advanced Product Information August 2004

(1 of 3)

### Features

- □ Small Size: 45 x 92 mils
- □ High Gain: 11.5 dB, Nom
- □ Medium Power: +25 dBm, Typ P1dB @14 GHz
- **Directly Cascadable Fully Matched**
- **Unconditionally Stable**
- □ Single Bias Operation
- **Bias Control**
- pHEMT Technology
- □ Silicon Nitride Passivation

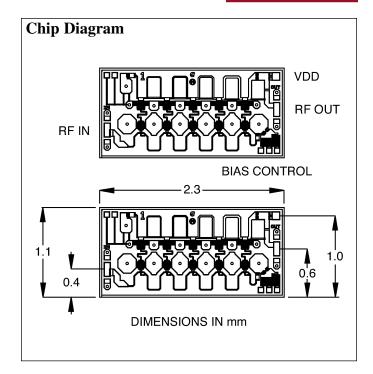

Parameters	Units	Min	Тур	Max
Frequency Range	GHz	2.0		22.0
Small Signal Gain	dB	10.0		13.5
Gain Flatness	±dB			0.8
Gain Variation (-40°C to +85°C)	±dB			0.35
Input Return Loss	dB		-10.0	
Output Return Loss	dB		-9.0	
Power Output (@1 dB Gain Compression) 1	dBm	22.5		
P1dB Variation (over operating frequency)	dBm			4.5
P1dB Variation (-40°C to +85°C)	±dBm			0.25
Saturated Output Power	dBm	24.0		29.0
Second Order Intercept Point @ 10 GHz	dBm		48.0	
Third Order Intercept Point @ 10 GHz	dBm		37.5	
Noise Figure	dB			7.5
Current	mA	250	295	340
Thermal Resistance	°C/W			33.0
Stability <sup>2</sup>	Unconditionally Stable			

Notes: 1. Tested on Celeritek Connectorized evaluation board (standard assembly condition detailed on page 3). 2. Stability factor measured on-wafer.

### **Absolute Maximum Ratings**

Parameter	Rating	
Drain Voltage	7V (min.) / 9V (max.)	
Drain Current	350 mA	
Continuous Power Dissipation	2.8 W	
Input Power	+20 dBm	
Storage Temperature	-50°C to +150°C	
Channel Temperature	+175°C	
Operating Backside Temperature	-40 to (see note 2)°C	


Notes: 1. Operation outside these limits can cause permanent damage. 2. Calculation maximum operating temperature: Tmax = 175–(Pdis [W] x 33.0) [°C].


### **Die Attach and Bonding Procedures**


**Die Attach:** Eutectic die attach is recommended. For eutectic die attach: Preform: AuSn (80% Au, 20% Sn); Stage Temperature:  $290^{\circ}$ C,  $\pm 5^{\circ}$ C; Handling Tool: Tweezers; Time: 1 min or less.


**Wire Bonding:** Wire Size: 0.7 to 1.0 mil in diameter (prestressed); Thermocompression bonding is preferred over thermosonic bonding. For thermocompression bonding: Stage Temperature: 250°C; Bond Tip Temperature: 150°C; Bonding Tip Pressure: 18 to 40 gms depending on size of wire.

## Typical Performance (Vdd = 8V, 300 mA)

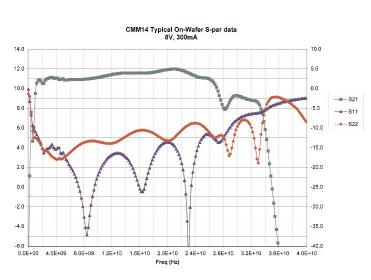



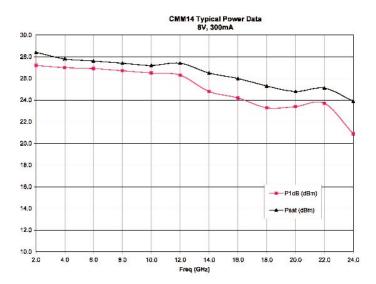

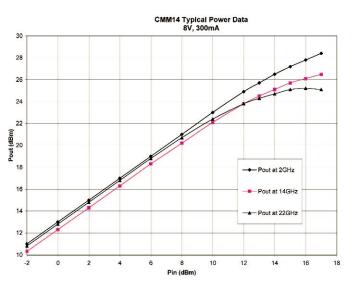






## **CMM0014-BD**

## Advanced Product Information - August 2004

(3 of 3)

### **Assembly Example**

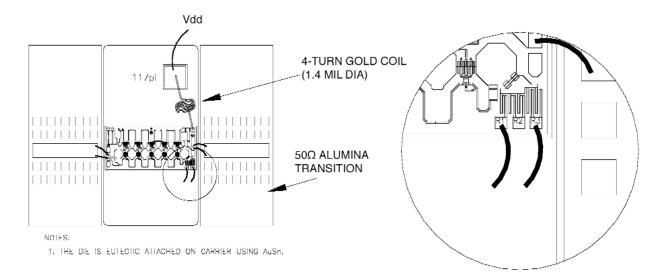

#### Note:

1. Eutectic attach on at least 30mil thick CuW or CuMo carrier is recommend.

2. For evaluation, a 1.4mil wire diameter lithium gold air coil has been used .

#### **Ordering Information**

The CMM-0014-BD is available in bare die and is shipped in Gel Pak.Part Number for OrderingPackageCMM0014-BDBare Die

Celeritek reserves the right to make changes without further notice to any products herein. Celeritek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Celeritek assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Celeritek does not convey any license under its patent rights nor the rights of others. Celeritek products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Celeritek product could create a situation where personal injury or death may occur. Should Buyer purchase or use Celeritek products for any such unintended or unauthorized application, Buyer shall indemnify and hold Celeritek and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Celeritek was negligent regarding the design or manufacture of the part. Celeritek is a registered trademark of Celeritek, Inc. Celeritek, Inc. is an Equal Opportunity/Affirmative Action Employer.