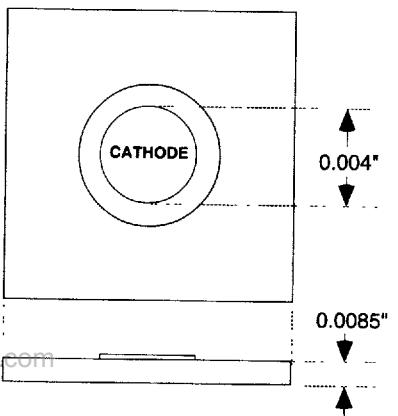


**CS6638 Series • Mesa Switching Diodes**


Type	Volts	mA	mW	(V <sub>F</sub> ) Volts	@ I <sub>F</sub> mA	(I <sub>R</sub> ) nA	@ V <sub>R</sub> Volts	Maximum Reverse Recovery (NOTE 1) (t <sub>rr</sub> ) nS	Die Geometry Fig #
CS6638	150	300	750	1.1	200	25	20	4.5	3
CS6642	100	300	750	1.2	100	25	20	5.0	3
CS6643	75	300	750	1.2	100	25	20	6.0	3

Note 1: I<sub>F</sub> = I<sub>R</sub>, t<sub>rr</sub> @ 0.1 I<sub>R</sub>**BKC 2000 Series • High Voltage, General Purpose Switching Diodes**

Type	Volts	mA	mW	(V <sub>F</sub> ) Volts	@ I <sub>F</sub> mA	(I <sub>R</sub> ) nA	@ V <sub>R</sub> Volts	Maximum Reverse Recovery (NOTE 1) (t <sub>rr</sub> ) nS	Die Geometry Fig #
CSA170	20	150	300	1.0	80	50	10	100	1
CSAV17	25	200	400	1.0	100	100	20	50	1
CSAV18	60	200	400	1.0	100	100	100	50	1
CSAV19	120	200	400	1.0	100	100	100	50	1
CSAV20	200	200	400	1.0	100	100	150	50	1
CSAV21	250	200	400	1.0	100	100	200	50	1
CSAY80	120	200	400	1.0	150	100	120	50	1
CS658	120	200	500	1.0	100	50	50	300	1
CS659	60	200	500	1.0	6	5000	50	-	1
CS660	120	200	500	1.0	6	5000	100	-	1
CS661	240	200	500	1.0	6	10000	200	300	1
CS3070	200	200	500	1.0	100	100	175	50	1
CS4938	200	200	500	1.0	100	100	175	50	1

Note 1: I<sub>F</sub> = I<sub>R</sub>, t<sub>rr</sub> @ 0.1 I<sub>R</sub>**Fig. 3**

0.015" x 0.015" Square

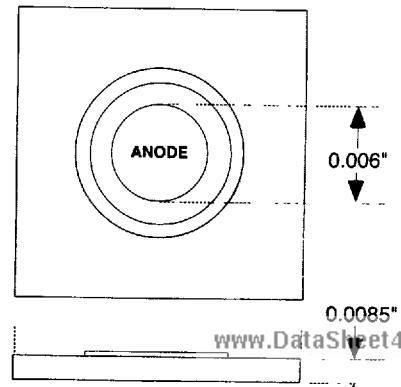**Fig. 4**

0.015" x 0.015" Square