

SMALL SIGNAL NPN TRANSISTORS


| Туре | Marking |
|--------|---------|
| BC547B | BC547B |
| BC547C | BC547C |


- SILICON EPITAXIAL PLANAR NPN TRANSISTORS
- TO-92 PACKAGE SUITABLE FOR THROUGH-HOLE PCB ASSEMBLY
- BC547B THE PNP COMPLEMENTARY TYPE IS BC557B

.

APPLICATIONS

- WELL SUITABLE FOR TV AND HOME APPLIANCE EQUIPMENT
- SMALL LOAD SWITCH TRANSISTORS WITH HIGH GAIN AND LOW SATURATION VOLTAGE

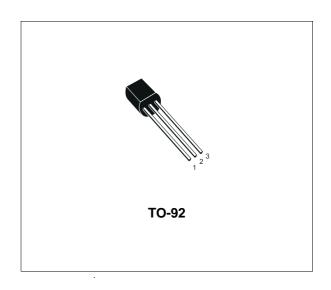

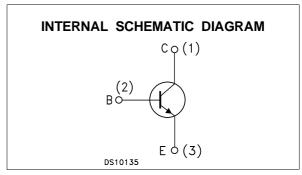

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit |
|-------------------|--|------------|------|
| V _{CBO} | Collector-Base Voltage (I _E = 0) | 50 | V |
| V_{CEO} | Collector-Emitter Voltage (I _B = 0) | 45 | V |
| V _E BO | Emitter-Base Voltage (Ic = 0) | 6 | V |
| Ic | Collector Current 100 | | mA |
| I _{CM} | Collector Peak Current | 200 | mA |
| P _{tot} | Total Dissipation at T _C = 25 °C | 500 | mW |
| T _{stg} | Storage Temperature | -65 to 150 | °C |
| Tj | Max. Operating Junction Temperature | 150 | °C |

January 2003 1/4

THERMAL DATA

| R _{thj-amb} • | Thermal Resistance Junction-Ambient | Max | 250 | °C/W |
|-------------------------|-------------------------------------|-----|------|------|
| R _{thj-Case} • | Thermal Resistance Junction-Case | Max | 83.3 | °C/W |

ELECTRICAL CHARACTERISTICS (T_{case} = 25 °C unless otherwise specified)


| Symbol | Parameter | Test Conditions | Min. | Тур. | Max. | Unit |
|-----------------------|--|---|------------|-------------|-------------|----------|
| I _{CBO} | Collector Cut-off Current (I _E = 0) | $V_{CB} = 30 \text{ V}$ $V_{CB} = 30 \text{ V}$ $T_{C} = 150 ^{\circ}\text{C}$ | | | 15 5 | nΑ μΑ |
| I _{EBO} | Emitter Cut-off Current (I _C = 0) | V _{EB} = 5 V | | | 100 | nA |
| V _{(BR)CEO*} | Collector-Emitter Breakdown Voltage (I _B = 0) | Ic = 10 mA | 45 | | | V |
| $V_{CE(sat)^*}$ | Collector-Emitter Saturation Voltage | I_C = 10 mA I_B = 0.5 mA I_C = 100 mA I_B = 5 mA | | 0.09 0.2 | 0.25 0.6 | V |
| $V_{BE(sat)^*}$ | Base-Emitter Saturation Voltage | $I_{C} = 10 \text{ mA}$ $I_{B} = 0.5 \text{ mA}$ $I_{C} = 100 \text{ mA}$ $I_{B} = 5 \text{ mA}$ | | 0.7 0.9 | | V |
| V _{BE(on)} * | Base-Emitter On Voltage | I _C = 2 mA | 0.58 | 0.66 | 0.7 0.77 | V |
| h _{FE} | DC Current Gain | I _C = 2 mA | 200 420 | | 450 800 | |
| f _T | Transition Frequency | $I_C = 10 \text{ mA } V_{CE} = 5 \text{ V } f = 100 \text{MHz}$ | 100 | | | MHz |
| Ссво | Collector-Base Capacitance | IE = 0 VCB = 10 V f = 1 MHz | | 1.5 | | pF |
| C _{EBO} | Emitter-Base Capacitance | $I_C = 0$ $V_{EB} = 0.5 \text{ V}$ $f = 1 \text{ MHz}$ | | 11 | | pF |
| NF | Noise Figure | $V_{CE} = 5 \text{ V}$ $I_C = 200 \mu\text{A}$ $f = 1 \text{KHz}$ $\Delta f = 200 \text{Hz}$ $R_G = 2 \text{K}\Omega$ | | 2 | 10 | dB |

^{*} Pulsed: Pulse duration = 300 μ s, duty cycle \leq 2 %

2/4

TO-92 MECHANICAL DATA

| DIM. | mm | | inch | | | |
|------|----------|------|----------|----------|------|----------|
| 2 | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| А | 4.32 | | 4.95 | 0.170 | | 0.195 |
| b | 0.36 | | 0.51 | 0.014 | | 0.020 |
| D | 4.45 | | 4.95 | 0.175 | | 0.194 |
| Е | 3.30 | | 3.94 | 0.130 | | 0.155 |
| е | 2.41 | | 2.67 | 0.095 | | 0.105 |
| e1 | 1.14 | | 1.40 | 0.045 | | 0.055 |
| L | 12.70 | | 15.49 | 0.500 | | 0.609 |
| R | 2.16 | | 2.41 | 0.085 | | 0.094 |
| S1 | 1.14 | | 1.52 | 0.045 | | 0.059 |
| W | 0.41 | | 0.56 | 0.016 | | 0.022 |
| V | 4 degree | , | 6 degree | 4 degree | | 6 degree |

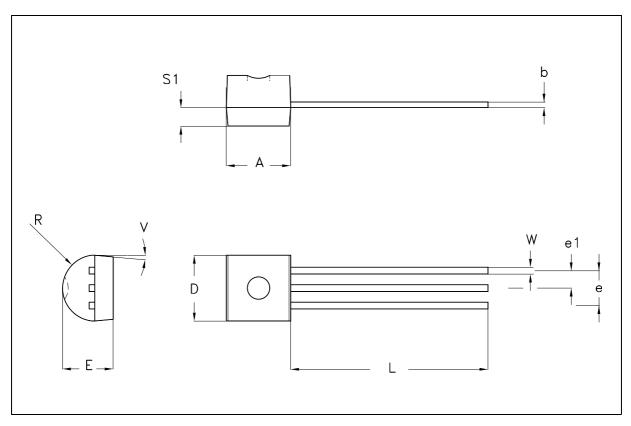

₹₹ 3/4

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 2002 STMicroelectronics – Printed in Italy – All Rights Reserved STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

http://www.st.com

47/