


Lowpass Filter

KR Model
2218

Specifications

KR Part Number	2218
Filter Type	Lowpass
Insertion Loss	< 1 dB
End of Passband	1.75 MHz
Passband Ripple	< 0.25 dB
1.92 MHz	< 3 dB
Start of Stopband	2.41 MHz
Stopband Attenuation	> 45 dB
Group Delay Ripple	< 50 nsec
Group Delay Control to	1.75 MHz
Source and Load Impedance	75 Ω

Outline Drawing

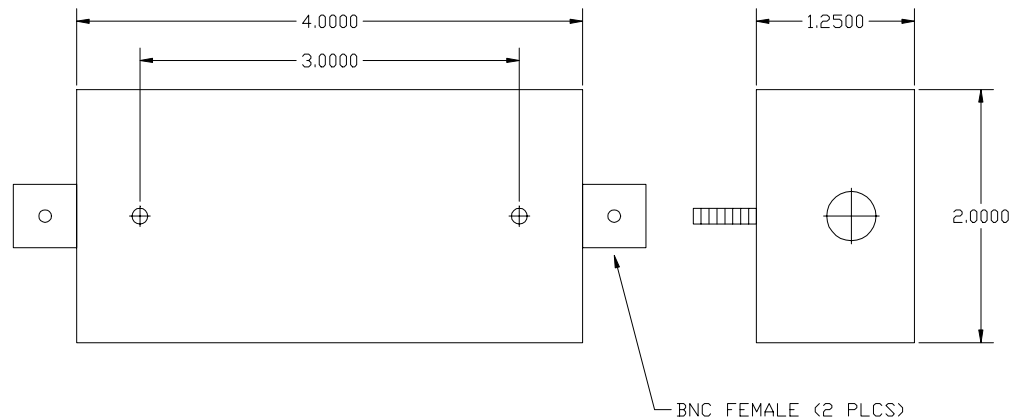

KR Electronics
www.krfilters.com
 91 Avenel Street
 Avenel, NJ 07001
 732-636-1900

Dimensions inches [mm]