

High Power Lamp Modules

Preliminary

EHP-1103/UT01X-P01

EHP-1103/UT01A-P01

Features

- Popular 10mm package.
- Color coordinates: x=0.29, y=0.28 according to CIE.
- View angle:100°.
- High light flux output
- Soldering methods: Dip soldering.
- Grouping parameter: total luminous flux, color coordinates.
- Optical efficiency: 35 lm/W
- Thermal resistance (junction to heat sink): 15K/W
- The product itself will remain within RoHS compliant version.
- ESD-withstand voltage: up to 4KV

EHP-1103/UT01B-P01

Descriptions

- The LED module consists of an emitter connected to a finny heat sink and PCB. The module/A only includes finny a heat sink; the module/B option includes PCB to connect external circuit.
- High power lamp modules can be connected and powered in a close packed finny configuration for tight spacing and increased light output per unit area.



Applications

- Flashlight
- Sunshine light.
- Advertising Signs.
- Back lighting.

Device Selection Guide

LED D. AM	Cl		
LED Part No.	Material	Emitted Color	Lens Color
EHP1103/UT01X-P01	InGaN	White	Water Clear

Everlight Electronics Co., Ltd.

 $http \verb|\| : www.everlight.com|\\$

Prepared date:06-06-2006

Rev

Page: 1 of 9

Prepared by: Grace Shen

Device Number:



High Power Lamp Modules


Preliminary

EHP-1103/UT01X-P01

Package Dimensions

EHP-1103/UT01A-P01 LIGHT SOURCE 1.2±0.3 3.0 ± 0.3 3.58 ± 0.3 R0.50(TYP. R7.00 ø3.20 16.5TYP 30MIN.

EHP-1103/UT01B-P01

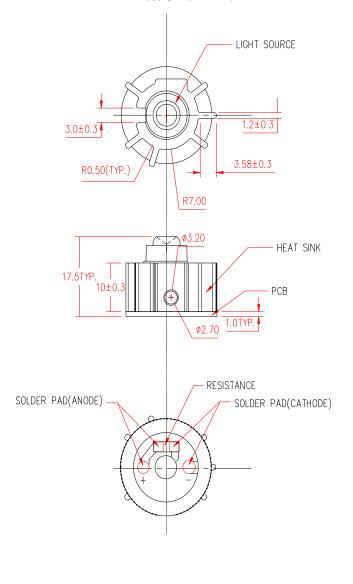

Notes:

- All dimensions are in millimeters.
- Drawings not to scale.
- For LED module/B, the resistance is mount to the square solder pads on PCB according to customer's demand
- Electrical interconnection pads labeled on the PCB with "+" and "-" to denote positive and negative, respectively.

Everlight Electronics Co., Ltd.

http\\:www.everlight.com

Prepared date:06-06-2006

Rev

Page: 2 of 9



High Power Lamp Modules

Preliminary

EHP-1103/UT01X-P01

Absolute Maximum Rating $(T_a=25^{\circ}C)$

Parameter	Symbol	Absolute Maximum Rating	Unit
Forward Current	I_{F}	350	mA
Thermal resistance (junction to heat sink)	R_{th}	15	K/W
LED Junction Temperature	Tj	120	$^{\circ}\!\mathbb{C}$
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	T_{stg}	-40 ~ +100	$^{\circ}\!\mathbb{C}$
Electrostatic Discharge	ESD	4K	V
Soldering Temperature	T_{sol}	260 ±5	$^{\circ}\!\mathbb{C}$
Power Dissipation	P_d	1.4	W
Zener Reverse Current	Iz	100	mA

Notes: Soldering time ≤ 5 seconds.

Electro-Optical Characteristics ($T_a=25^{\circ}C$)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Flux	Flux	27	37		lm	
Viewing Angle	$2 heta_{ ext{1/2}}$		100		deg	I _F =350mA
Forward Voltage	V_{F}	3.0	3.5	4.0	V	
Reverse Current	I_R			10	μΑ	V _R =5V
Zener Reverse Voltage	Vz	5.2			V	Iz=5mA
Chromaticity	X		0.29			1 250 4
Coordinates	у		0.28			I _F =350mA

Everlight Electronics Co., Ltd.

Device Number:

http\\:www.everlight.com

Prepared date:06-06-2006

Rev

Page: 3 of 9



High Power Lamp Modules

Preliminary

EHP-1103/UT01X-P01

Rank Combination (I_F=350mA)

Rank	J2	Ј3	J4	J5
Luminous Flux	27~33	33~39	39~45	45~52

^{*}Measurement Uncertainty of Luminous Intensity: ±15%

Unit:1m

Forward Voltage Combination (V at 350mA)

Rank	1	2	3	4	5
Forward Voltage	3.0~3.2	3.2~3.4	3.4~3.6	3.6~3.8	3.8~4.0

^{*}Measurement Uncertainty of Forward Voltage: ±0.1V

Unit:V

Everlight Electronics Co., Ltd.

Device Number:

http\\:www.everlight.com

Prepared date:06-06-2006

Rev

Page: 4 of 9



High Power Lamp Modules


Preliminary

EHP-1103/UT01X-P01

Color Combination (at 350mA)

Color Ran	ks	CIE			
A 1	X	0.245	0.264	0.28	0.26
A1	Y	0.225	0.267	0.248	0.21
A O	X	0.264	0.283	0.296	0.28
A0	Y	0.267	0.305	0.267	0.248
D2	X	0.283	0.304	0.307	0.287
В3	Y	0.305	0.33	0.315	0.295
B4	X	0.304	0.33	0.33	0.307
	Y	0.33	0.36	0.339	0.315
D.5	X	0.287	0.307	0.311	0.296
B5	Y	0.295	0.315	0.294	0.276
В6	X	0.307	0.33	0.33	0.311
	Y	0.315	0.339	0.318	0.294
C0	X	0.33	0.361	0.355	0.33
	Y	0.36	0.385	0.35	0.318

CIE Chromaticity Diagram

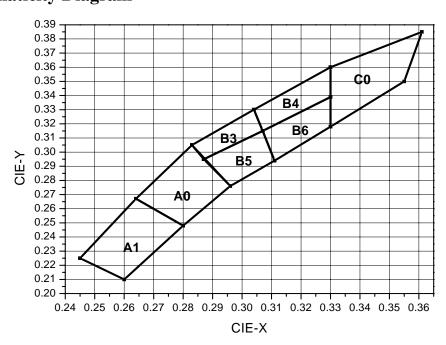

Everlight Electronics Co., Ltd.

Device Number:

http\\:www.everlight.com

Prepared date:06-06-2006

Rev

Page: 5 of 9





High Power Lamp Modules

Preliminary


EHP-1103/UT01X-P01


Typical Electro-Optical Characteristics Curves

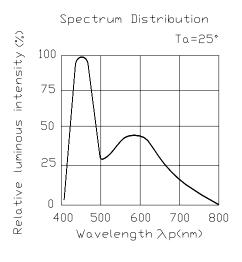





Forward Voltage(V)-volts



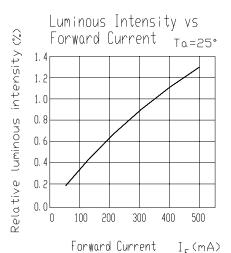

Forward Current Derating Curve





Everlight Electronics Co., Ltd.

Device Number: Prepared date:06-06-2006

http\\:www.everlight.com

Rev

Page: 6 of 9



High Power Lamp Modules

Preliminary

EHP-1103/UT01X-P01

Packing Quantity Specification

1.250PCS/1Bag , 5Bags/1Box

2.10Boxes/1Carton

Label Form Specification

CPN: Customer's Production Number

P/N : Production Number QTY: Packing Quantity

CAT: Ranks of Total Flux and Forward Voltage

HUE: Color Rank REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

Everlight Electronics Co., Ltd.

Device Number:

http\\:www.everlight.com

Prepared date:06-06-2006

Rev

Page: 7 of 9




High Power Lamp Modules

Preliminary

EHP-1103/UT01X-P01

Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
- 4. Below the zener reference voltage Vz, all the current flows through LED and as the voltage rises to Vz, the zener diode "breakdown." If the voltage tries to rise above Vz current flows through the zener branch to keep the voltage at exactly Vz.
- 5. When the LED is connected using serial circuit, if either piece of LED is no light up but current can't flow through causing others to light down. In new design, the LED is parallel with zener diode. if either piece of LED is no light up but current can flow through causing others to light up.

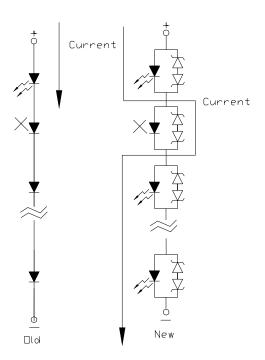



High Power Lamp Modules

Preliminary

EHP-1103/UT01X-P01

6. Soldering Condition

Careful attention should be paid during soldering. When soldering, leave more then 3mm from solder joint to case, and soldering beyond the base of the tie bar is recommended.

Avoiding applying any stress to the lead frame while the LEDs are at high temperature particularly when soldering.

Recommended soldering conditions:

Hand Soldering		DIP Soldering		
Temp. at tip of iron	400°C Max. (30W Max.)	Preheat temp.	100°C Max. (60 sec Max.)	
Soldering time	3 sec Max.	Bath temp.	265 Max.	
Distance	3mm Min.(From solder joint to case)	Bath time.	5 sec Max.	
		Distance	3mm Min.	

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

 $http: \www.everlight.com$

Everlight Electronics Co., Ltd.

Device Number :

http\\:www.everlight.com

Prepared date:06-06-2006

Rev Page: 9 of 9