

Technical Data Sheet

0805 Package Chip LED (1.0mm Height)

17-21/BHC-AN1P2/3T

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain with in RoHS compliant version.

Descriptions

- The 17-21 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

Everlight Electronics Co., Ltd.

D (N)	Chip		Resin Color	
Part No.	Material	Emitted Color		
17-21/BHC-AN1P2/3T	InGaN	Blue	Water Clear	



Page: 1 of 10


Rev.1


http://www.everlight.com Device No: DSE-000 Prepared date: 30-Jun.-2011 Prepared by: ZhouChen




17-21/BHC-AN1P2/3T


Package Outline Dimensions








For reflow soldering (Propose)



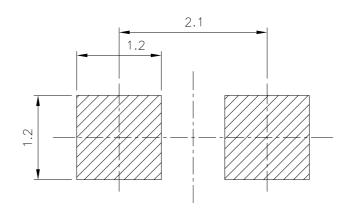

Page: 2 of 10

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1

Device No: DSE-000 Prepared date: 30-Jun.-2011 Prepared by:ZhouChen



17-21/BHC-AN1P2/3T

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V_R	5	V	
Forward Current	I_{F}	25	mA	
Peak Forward Current (Duty 1/10 @1KHz)	$ m I_{FP}$	100	mA	
Power Dissipation	Pd	95	mW	
Electrostatic Discharge(HBM)	ESD	150	V	
Operating Temperature	T_{opr}	-40 ~ +85	$^{\circ}\mathbb{C}$	
Storage Temperature	T_{stg}	-40 ~ +90	$^{\circ}$ C	
Soldering Temperature	T_{sol}	Reflow Soldering: 260 °C for 10 sec. Hand Soldering: 350 °C for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	$I_{\rm v}$	28.5		72	mcd	
Viewing Angle	$2 heta_{ ext{1/2}}$		140		deg	
Peak Wavelength	λp		468		nm	
Dominant Wavelength	λd	464.5		476.5	nm	$I_F = 20 \text{mA}$
Spectrum Radiation Bandwidth	Δλ		25		nm	
Forward Voltage	V_{F}	2.7	3.3	3.7	V	
Reverse Current	I_R			50	μ A	V _R =5V

Notes:

1.Tolerance of Luminous Intensity ±11%

2. Tolerance of Dominant Wavelength ±1nm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 3 of 10



17-21/BHC-AN1P2/3T

Bin Range Of Dom. Wavelength

Group	Bin	Min	Max	Unit	Condition
A	A9	464.5	467.5	nm I	I _F =20mA
	A10	467.5	470.5		
	A11	470.5	473.5		
	A12	473.5	476.5		

Bin Range Of Luminous Intensity

	v			
Bin	Min	Max	Unit	Condition
N1	28.5	36.0		
N2	36.0	45.0	mcd	I _F =20mA
P1	45.0	57.0		
P2	57.0	72.0		

Notes:

- 1.Tolerance of Luminous Intensity ±11%
- 2. Tolerance of Dominant Wavelength ±1nm


Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 4 of 10



17-21/BHC-AN1P2/3T


Typical Electro-Optical Characteristics Curves

Spectrum Distribution




Forward Voltage $V_F(V)$


Luminous Intensity vs.




Luminous Intensity vs Forward Current



Forward Current Derating Curve



Radiation Diagram



Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 5 of 10



Label explanation

CAT: Luminous Intensity Rank


HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank

17-21/BHC-AN1P2/3T



Reel Dimensions

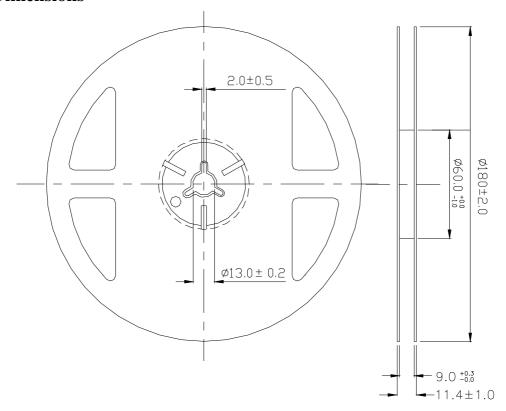

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm


Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 6 of 10

Device No: DSE-000 Prepared date: 30-Jun.-2011 Prepared by:ZhouChen




17-21/BHC-AN1P2/3T

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

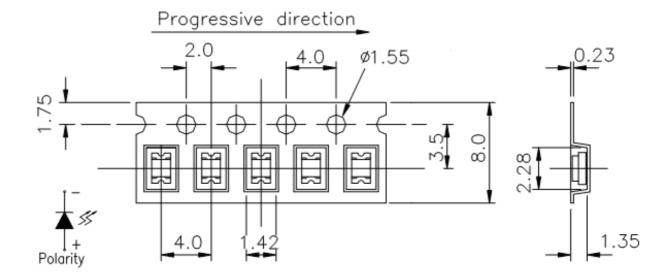

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

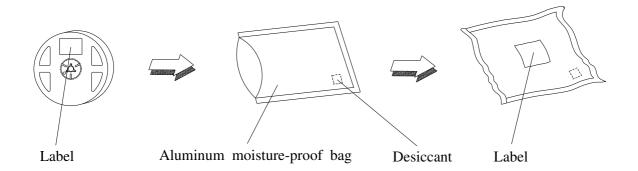

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 7 of 10



17-21/BHC-AN1P2/3T

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85% RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 8 of 10



17-21/BHC-AN1P2/3T

Page: 9 of 10

Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

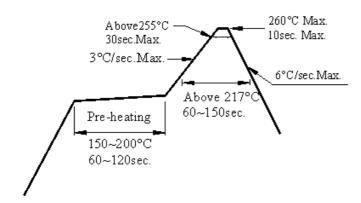

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1

Device No: DSE-000 Prepared date: 30-Jun.-2011 Prepared by:ZhouChen




17-21/BHC-AN1P2/3T

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

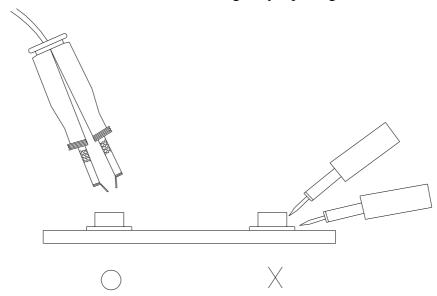

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 10 of 10