

MBR4030PT - MBR4060PT


40A SCHOTTKY BARRIER RECTIFIER

Features

- Schottky Barrier Chip
- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- High Surge Capability
- High Current Capability and Low Forward Voltage Drop
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications

Mechanical Data

- Case: Molded Plastic
- Plastic Material: UL Flammability Classification Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: As Marked on Body
- Marking: Type Number
- Weight: 5.6 grams (approx.)

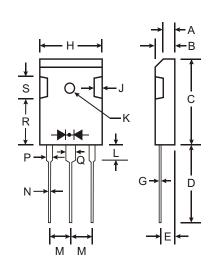

TO-3P						
Dim	Min	Max				
Α	1.88	2.08				
В	4.68	5.36				
С	20.63	22.38				
D	18.5	21.5				
Ε	2.1	2.4				
G	0.51	0.76				
Н	15.38	16.25				
J	1.90	2.70				
K	2.9∅	3.65∅				
L	3.78	4.50				
M	5.2	5.7				
N	0.89	1.53				
Р	1.82	2.46				
Q	2.92	3.23				
R	11.70	12.84				
S	_	6.10				
All Dimensions in mm						

Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	MBR 4030PT	MBR 4035PT	MBR 4040PT	MBR 4045PT	MBR 4050PT	MBR 4060PT	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		30	35	40	45	50	60	V
RMS Reverse Voltage		21	24.5	28	31.5	35	42	V
Average Rectified Output Current @ T _C = 125°C (Note 1)		40						Α
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)		400						А
Forward Voltage Drop	V _{FM}	0.70 0.80 0.60 0.70					V	
$ \begin{array}{llllllllllllllllllllllllllllllllllll$		1.0 100						mA
Typical Total Capacitance (Note 2)		1100						pF
Typical Thermal Resistance Junction to Case (Note 1)		1.4						°C/W
Voltage Rate of Change (Rated V _R)		10,000						V/μs
Operating and Storage Temperature Range		-65 to +150						°C

Notes:

- 1. Thermal resistance junction to case mounted on heatsink.
- 2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.



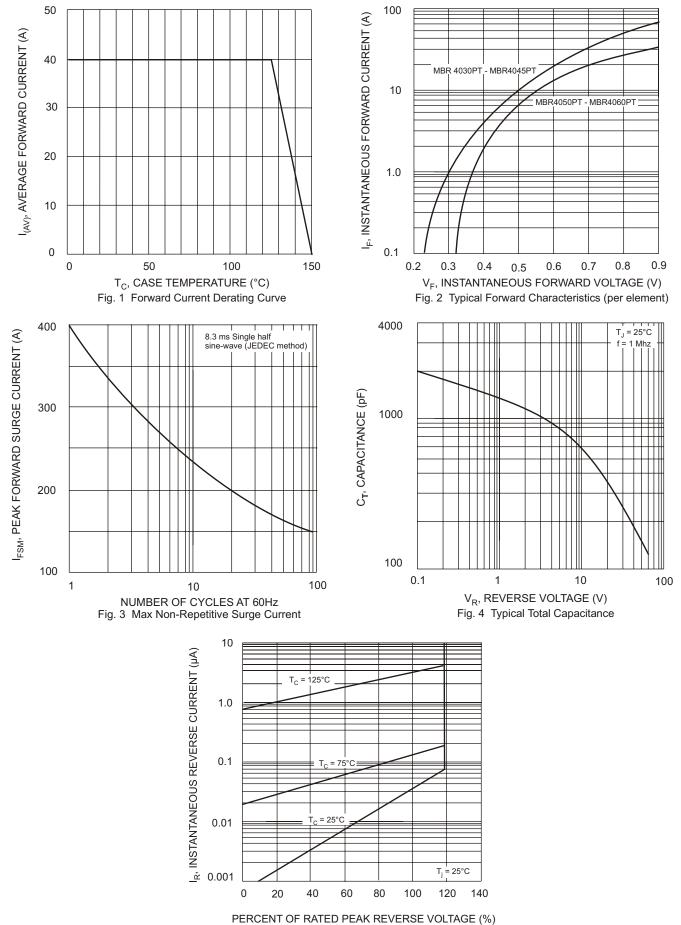


Fig. 5 Typical Reverse Characteristics