DATE: <u>05/21/2007</u>

COSMO
ELECTRONICS CORPORATION

Power Photo TRIAC:

KTLP3502H

62P45001

SHEET 1 OF 6

REV. 2

Photo Coupler for Power Photo TRIAC Output

Features

- 1. Compact dual-in-line package.
- 2. 400V peak blocking voltage.
- 3. Isolation voltage between input and output 5000Vrms.

Application :

- 1. TRIAC Driver.
- 2. Programmable Controllers.
- 3. AC-Output Module.
- 4. Solid State Relay.

DATE: 05/21/2007

cosmo **ELECTRONICS CORPORATION**


Power Photo TRIAC:

KTLP3502H

62P45001


REV. 2 SHEET 2 OF 6

Outside dimension : Unit (mm)

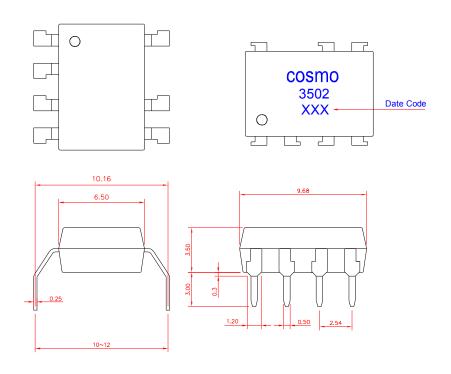

Tolerance: ±0.2mm

● Schematic : Top View



- 1. Cathode
- 2. Anode
- 3. Cathode
- 4. Cathode
- 5. Gate
- 6. T1
- 8. T2

DATE: <u>05/21/2007</u>

COSMO
ELECTRONICS CORPORATION

Power Photo TRIAC:

KTLP3502H

62P45001 SHEET 3 OF 6

REV. 2

Absolute Maximum Ratings

	Parameter	Symbol	Rating	Unit
Input	Forward current	I _F	50	mA
	Peak forward current	I _{FP}	1	А
	Reverse voltage	V _R	6	V
	Off-State Output Terminal voltage	V_{DRM}	400	V
Output	On-State R.M.S. Current	I _{T(RMS)}	0.5	А
	Peak Nonrepetitive Surge Current (60Hz, Peak)	I _{TSM}	5	А
Isolation voltage (AC, 1 minute) Operating temperature		V _{iso}	5000	V_{rms}
		T_{opr}	-40 to +85	°C
	Storage temperature	T _{stg}	-40 to +125	$^{\circ}\!\mathbb{C}$
Soldering temperature 10 second		T _{sol}	260	$^{\circ}\!\mathbb{C}$

Electro-optical Characteristics

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V_{F}	I _F = 10mA	-	1.2	1.4	V
	Reverse current	I _R	V _R = 6V	-	ı	10	μA
Output	Peak Blocking Current	I _{DRM}	V _{DRM} = Rated	-	-	100	μΑ
	On-State Voltage	V_{TM}	$I_T = 0.75A$	-	-	3	V
	Holding Current	I _H	V _D = 5V	-	-	25	mA
	Critical rate of rise of Off-state voltage	dV/dt	$V_{DRM} = (1/\sqrt{2}) \cdot Rated$	-	1000	-	V/µs
charac-	Isolation resistance	R _{iso}	DC500V	5×10 ¹⁰	-	-	Ω
	Minimum trigger current	I _{FT}	V _D = 5V	-	-	10	mA

DATE: <u>05/21/2007</u>

cosmo

ELECTRONICS CORPORATION


Power Photo TRIAC:


KTLP3502H

62P45001


SHEET 4 OF 6

REV. 2

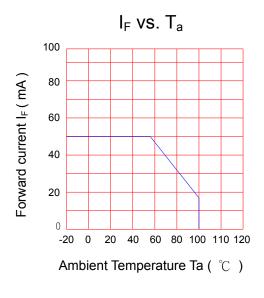


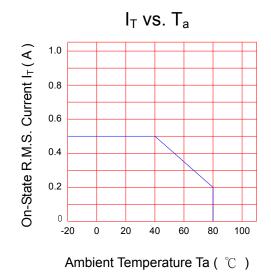


I_{FP} vs. Duty Ratio

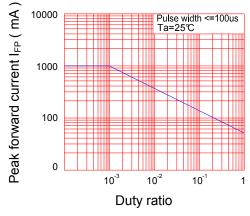


 I_F vs. V_F



I_{FT} vs. T_a



I_{DRM} vs. T_a

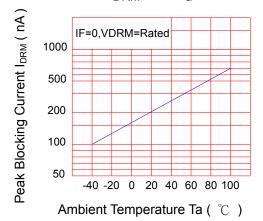

DATE: 05/21/2007

cosmo

ELECTRONICS CORPORATION

Power Photo TRIAC:


KTLP3502H

62P45001

SHEET 5 OF 6

REV. 2

 I_{TM} vs. V_{TM}

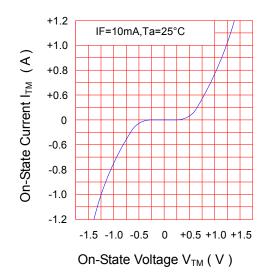

DATE: <u>05/21/2007</u>

cosmo

ELECTRONICS CORPORATION

Power Photo TRIAC:

KTLP3502H

62P45001

SHEET 6 OF 6

REV. 2

NOTICE

The information contained in this document is intended to be a general product description and is subject to change without notice. Please contact cosmo in order to obtain the latest device data sheets before using any cosmo device. cosmo does not assume any responsibility for use of any circuitry described. No circuit patent licenses are implied. This publication is the property of cosmo. No part of this publication may be reproduced or copied in any form or by any means, or transferred to any third party without the prior written consent of cosmo Electronics Corporation.

The devices listed in this document are designed for general applications only in electronic equipment. No devices shall be deployed which require higher level of reliability such as:

- Medical and other life support equipments.
- Space application.
- Telecommunication equipment (trunk lines).
- Nuclear power control equipment.

Unless it received prior written approval from cosmo.

cosmo takes no responsibility for damages arise form the improper usage of our device. Please contact cosmo for further information regarding the above notices.