












BNC CONNECTORS



MADE IN U.S.A.

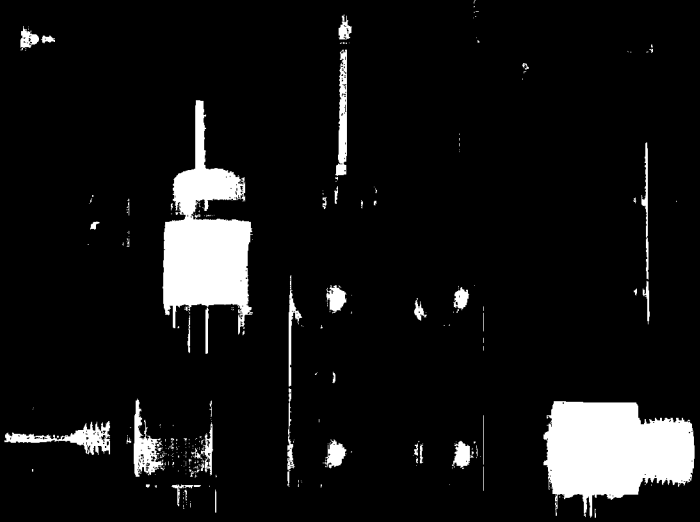


BNC CONNECTORS 50/75 OHM

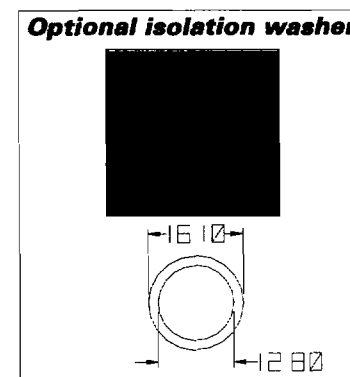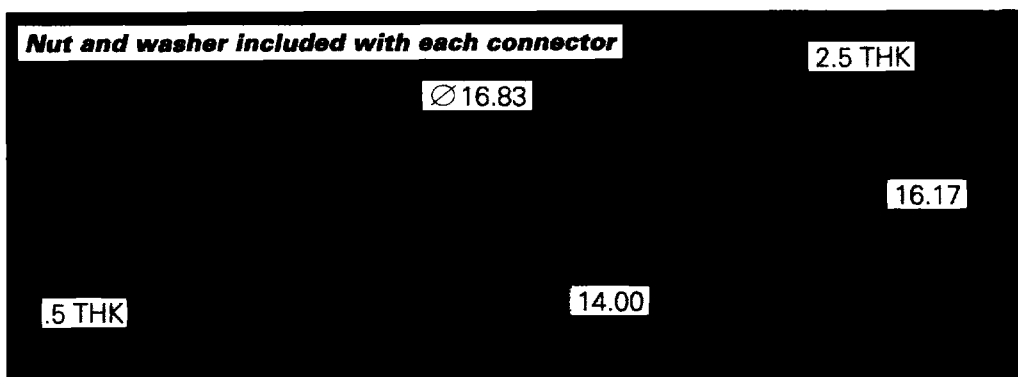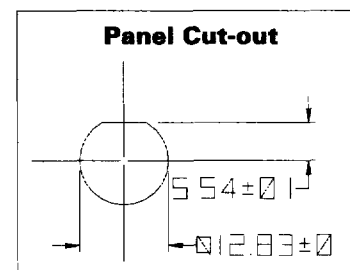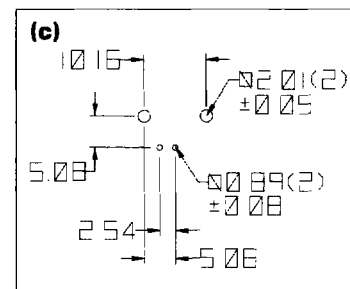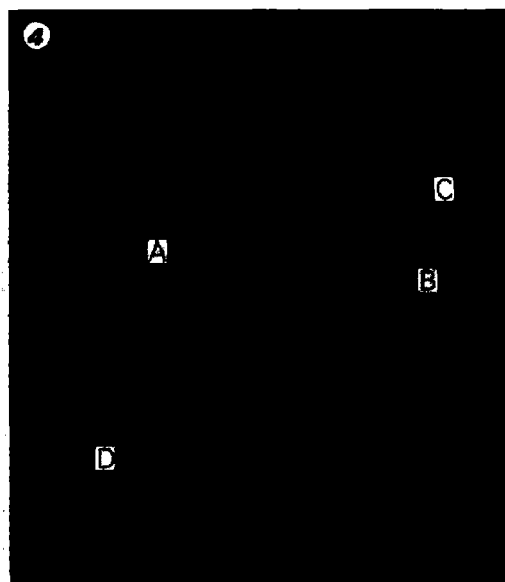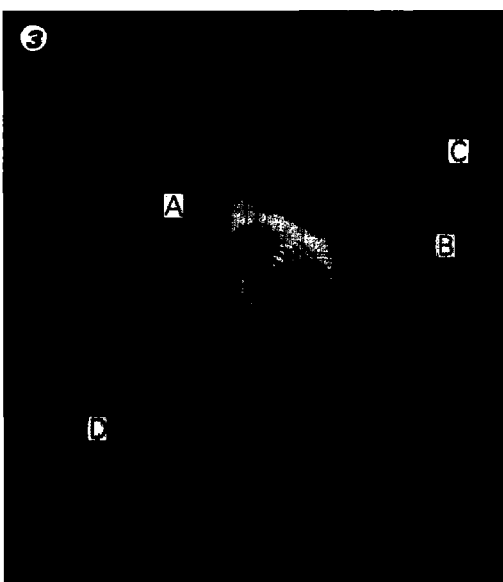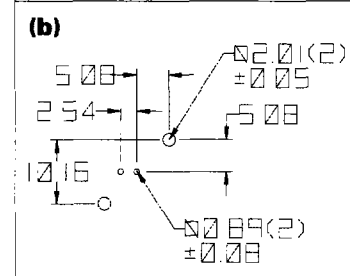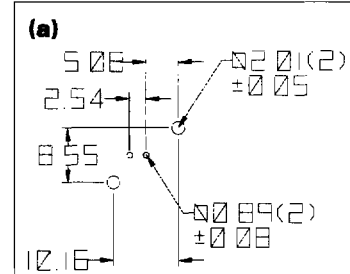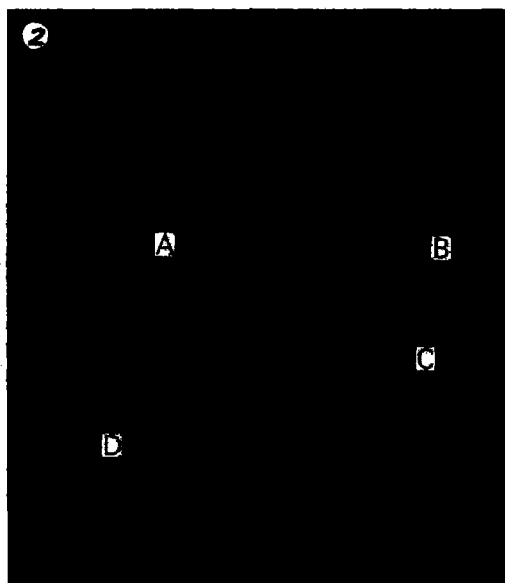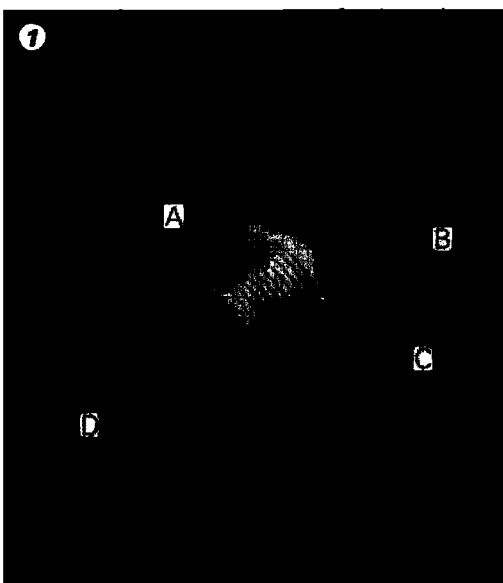

BNC CONNECTORS 50/75 OHM

	OHM	Description	Dimensions (MM)				Materials & Finish			Mtg. Style
Part #			A	B	C	D	Body	Contact	Dielectric	
560-301-00	50	BNC R/A PC Mount Valox Body	34.93	15.80	4.10	9.65	Z/Ni	Brass/G	P.P.	1 (c)
560-371-00	75		34.93	15.80	4.10	9.65	Z/Ni	Brass/G	P.P.	1 (c)
560-501-00	50	BNC R/A PC Mount Low Profile Valox	34.93	13.16	4.10	9.65	Z/Ni	Brass/G	P.P.	1 (c)
560-571-00	75		34.93	13.16	4.10	9.65	Z/Ni	Brass/G	P.P.	1 (c)
560-302-00	50	BNC Vertical PC Mount Valox Body	34.93	15.80	4.10	9.65	Z/Ni	Brass/G	P.P.	3 (a)
560-372-00	75		34.93	15.80	4.10	9.65	Z/Ni	Brass/G	P.P.	3 (a)
560-502-00	50	BNC Vertical PC Mount Low Profile Valox	34.93	13.16	4.10	9.65	Z/Ni	Brass/G	P.P.	3 (a)
560-572-00	75		34.93	13.16	4.10	9.65	Z/Ni	Brass/G	P.P.	3 (a)
561-001-00	50	BNC R/A PC Mount Metal Body	34.93	15.80	4.10	9.65	Z/Ni	Brass/G	P.P.	2 (c)
561-071-00	75		34.93	15.80	4.10	9.65	Z/Ni	Brass/G	P.P.	2 (c)
561-002-00	50	BNC Vertical PC Mount Metal Body	34.93	15.80	4.10	9.65	Z/Ni	Brass/G	P.P.	4 (b)
561-072-00	75		34.93	15.80	4.10	9.65	Z/Ni	Brass/G	P.P.	4 (b)
561-101-00	50	BNC R/A Metal PC Mount Low Profile	34.93	12.50	3.40	9.65	Z/Ni	Brass/G	P.P.	2 (c)
561-171-00	75		34.93	12.50	3.40	9.65	Z/Ni	Brass/G	P.P.	2 (c)
561-102-00	50	BNC Vertical PC Mount Metal Low Profile	34.93	12.50	3.40	9.65	Z/Ni	Brass/G	P.P.	4 (b)
561-172-00	75		34.93	12.50	3.40	9.65	Z/Ni	Brass/G	P.P.	4 (b)
	Note:	White is standard body color, black is also stocked. Contact A/D for P/N.								
	Note:	Z: Zinc Alloy								
		Ni: Nickel								
		G: Gold								
	Note:	Valox (R) RTM of General Electric Company								

Part Numbering System

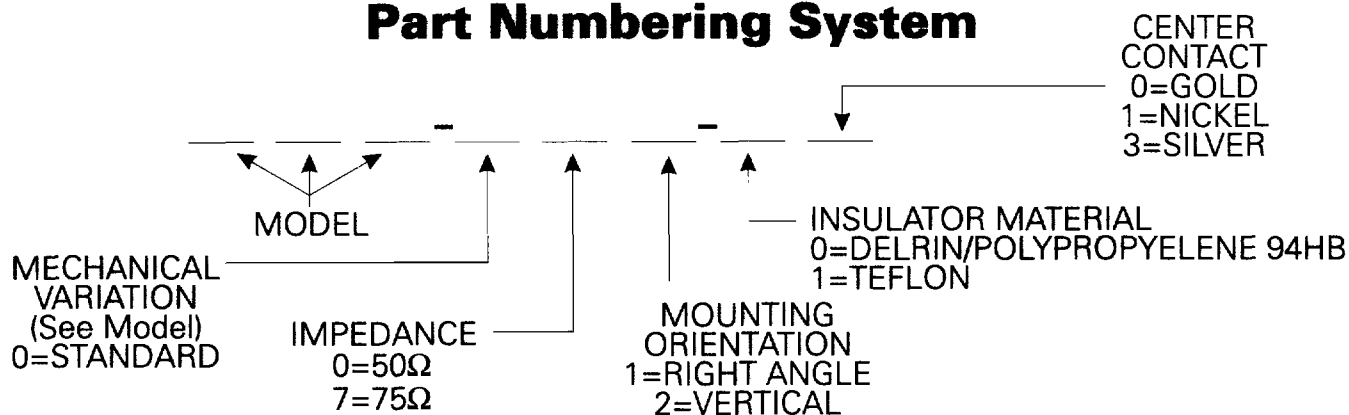


ELECTRONICS

PHONE (206) 851-8005
FAX (206) 851-8090

BNC CONNECTORS 50/75 OHM




FEMALE R/A PC MOUNT




520-001-00/50Ω

***520-071-00/75Ω**

RECOMMENDED
PCB LAYOUT
(BOTTOM VIEW)







FEMALE MINI R/A PC MOUNT




566-001-00/50Ω

***566-071-00/75Ω**

RECOMMENDED
PCB LAYOUT
(BOTTOM VIEW)







FEMALE MINI R/A PC MOUNT



567-001-00/50Ω

***567-071-00/75Ω**

RECOMMENDED
PCB LAYOUT
(BOTTOM VIEW)







FEMALE LOW PROFILE R/A PC MOUNT



590-001-00/50Ω

***590-201-00/75Ω**

RECOMMENDED
PCB LAYOUT
(BOTTOM VIEW)



*DIMENSIONS ARE FOR REFERENCE ONLY.

ELECTRONICS

PHONE (206) 851-8000

FAX (206) 851-8090


BNC CONNECTORS 50/75 OHM

FEMALE BULKHEAD SOLDER

540-002-01/50Ω


***540-072-01/75Ω**

RG/U 58, 59

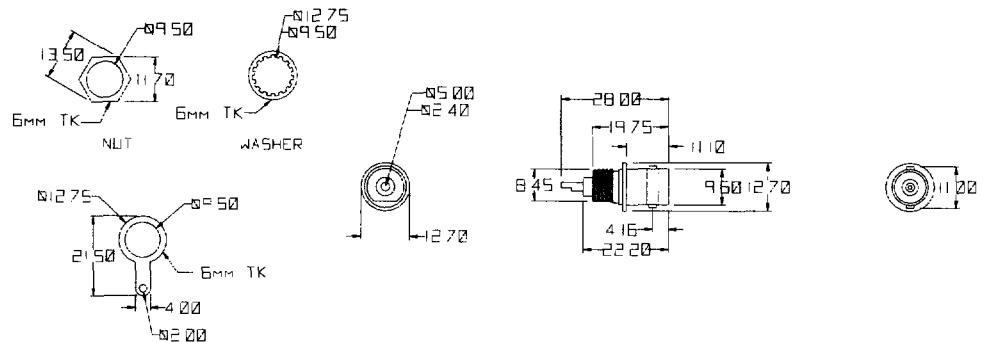

FEMALE BULKHEAD ISOLATED GROUND SOLDER


550-002-00/50Ω

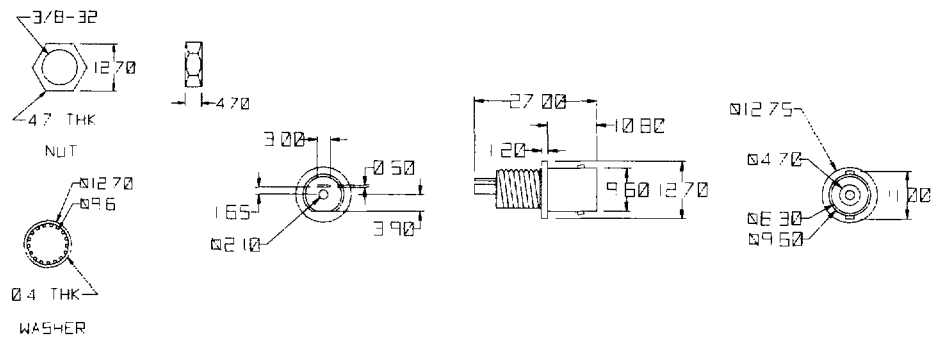

FEMALE BULKHEAD REAR MOUNT SOLDER

541-002-00/50Ω

***541-072-00/75Ω**

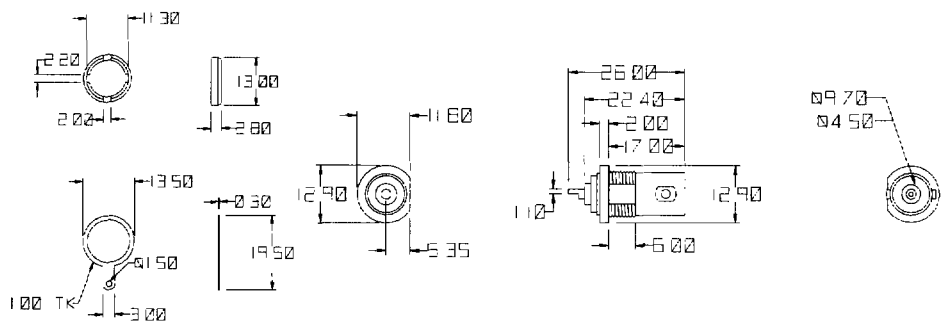


MALE BULKHEAD SOLDER

510-002-00/50Ω

***510-072-00/75Ω**

RG/U 58, 59

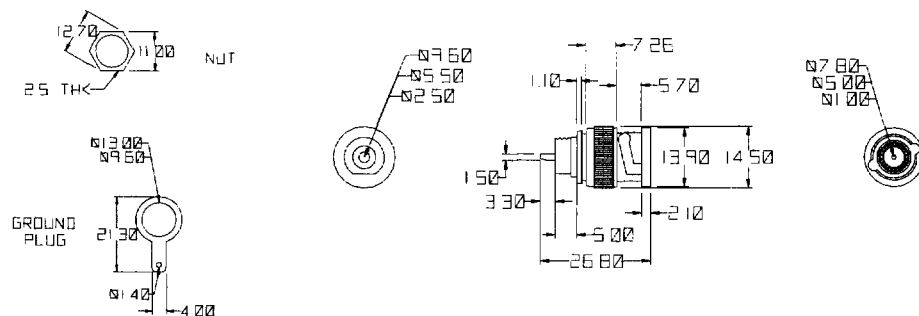

*DIMENSIONS ARE FOR REFERENCE ONLY.


ELECTRONICS

PHONE 2061 851-8005

FAX 2061 851-8090


BNC CONNECTORS 50/75 OHM

MALE CRIMP




512-002-00/50Ω

***512-072-00/75Ω**

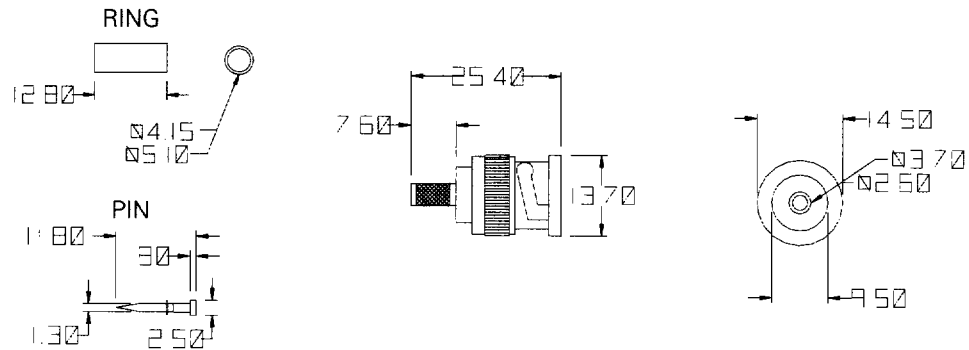


TWIN (MALE-FEMALE) CRIMP




512-902-00/50Ω

Designed for Miniature Twin Conductor Cable RG-108, 108A

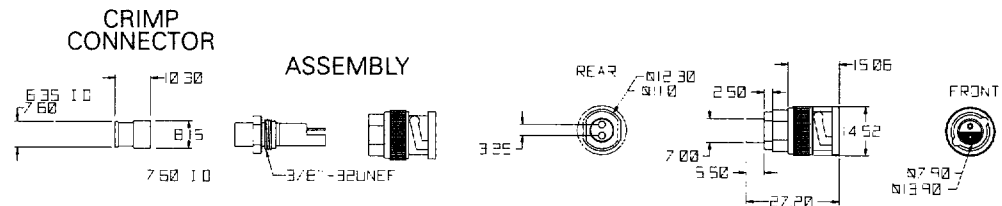


FEMALE CRIMP




515-002-00/50Ω

***515-072-00/75Ω**

RG/U: 58, 59

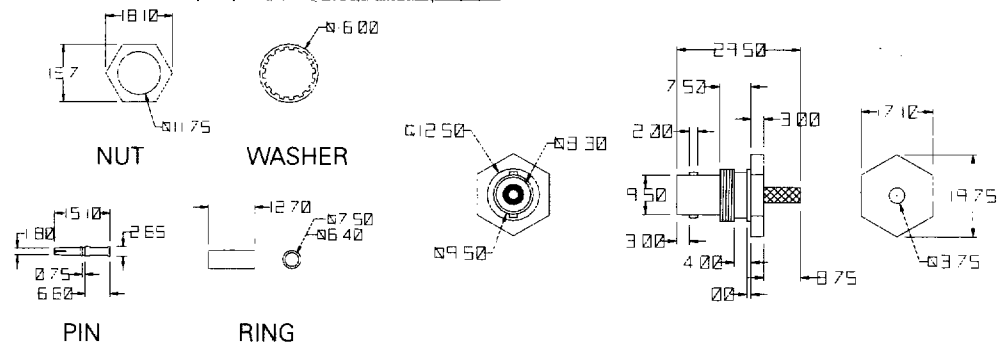


FEMALE CRIMP



546-002-00/50Ω

***546-072-00/75Ω**

RG/U 58, 59

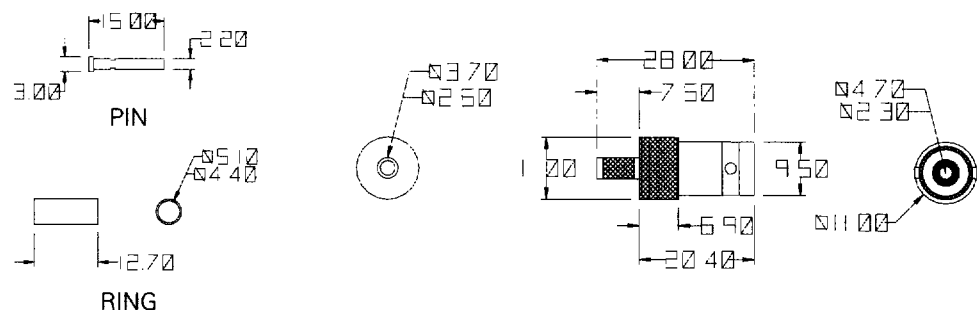

*DIMENSIONS ARE FOR REFERENCE ONLY.

ELECTRONICS

PHONE (206) 851-8005

FAX (206) 851-8090

1

4



(BOTTOM VIEW)

6.50
6.50
3.25
Ø0.95
Ø1.30
Ø0.95
Ø1.10
13.60
2.00
2.00
5.00
1.00
4.40
18.30
Ø4.50
Ø1.50
NOTE
BAYNET



PCB LAYOUT (BOTTOM VIEW)

Dimensions: 1.90, 6.90, 11.00, 16.54, 2.00, 3.94, 2.10, 4.40, 1.00, 6.00, 4.85, 1.00, 8.74, 1.00, 1.90, 6.90, 11.00, 16.54, 2.00, 3.94, 2.10, 4.40, 1.00, 6.00, 4.85, 1.00.

NOTE BAYONET


[illegible]

*DIMENSIONS ARE FOR REFERENCE ONLY.

PHONE (206) 851-8005
FAX (206) 851-8090

BNC CONNECTORS 50/75 OHM





FEMALE VERTICAL PC MOUNT




583-002-10/50Ω

***583-072-10/75Ω**

RECOMMENDED
PCB LAYOUT
(BOTTOM VIEW)







FEMALE VERTICAL PC MOUNT



588-002-00/50Ω

***588-072-00/75Ω**

RECOMMENDED
PCB LAYOUT
(BOTTOM VIEW)







FEMALE VERTICAL PC MOUNT




587-002-10/50Ω

***587-072-10/75Ω**

RECOMMENDED
PCB LAYOUT
(BOTTOM VIEW)







EXTENDED HEIGHT FEMALE VERTICAL PC MOUNT



581-002-00/50Ω

***581-072-00/75Ω**

RECOMMENDED
PCB LAYOUT
(BOTTOM VIEW)



*DIMENSIONS ARE FOR REFERENCE ONLY.

ELECTRONICS

PHONE (206) 851-8005


FAX (206) 851-8090

BNC CONNECTORS 50/75 OHM


FEMALE FEMALE STRAIGHT BULKHEAD



542-002-00/50Ω

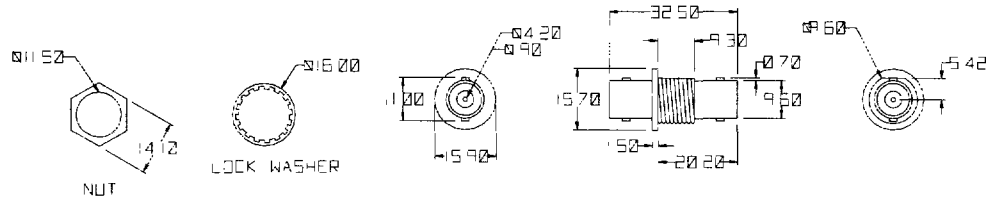


FEMALE FEMALE STRAIGHT




542-102-00/50Ω

***542-172-00/75Ω**

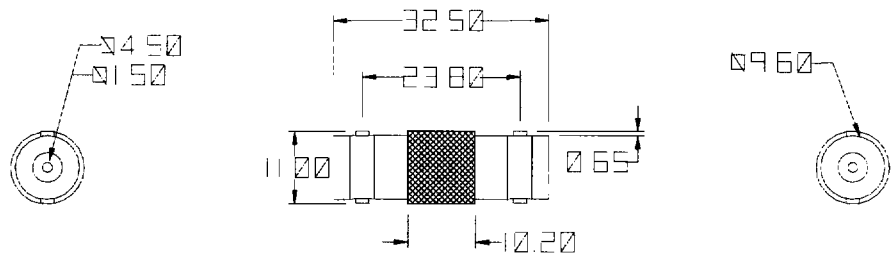


BNC MALE TO RCA PHONO JACK ADAPTOR



AVC-041/50Ω

***AVC-041-75/75Ω**

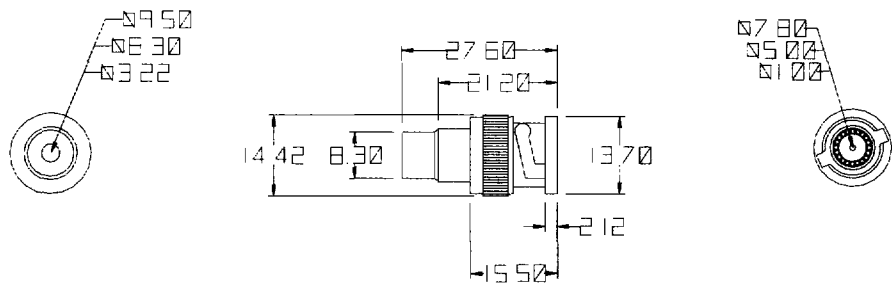


BNC FEMALE TO RCA MALE ADAPTOR



AVC-043/50Ω

***AVC-043-75/75Ω**

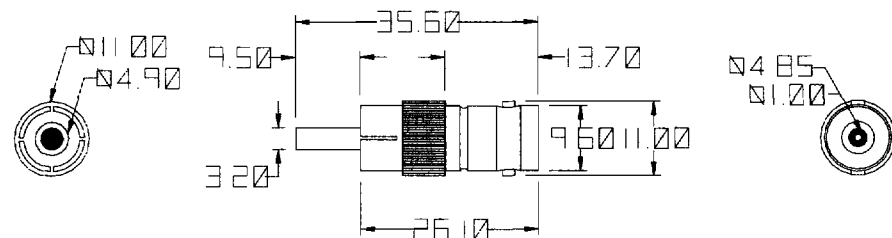

*DIMENSIONS ARE FOR REFERENCE ONLY.

ELECTRONICS

PHONE (206) 851-8005


FAX (206) 851-8090

BNC CONNECTORS 50/75 OHM

TWIN (MALE-FEMALE) VALOX R/A PC MOUNT




568-301-00/50Ω

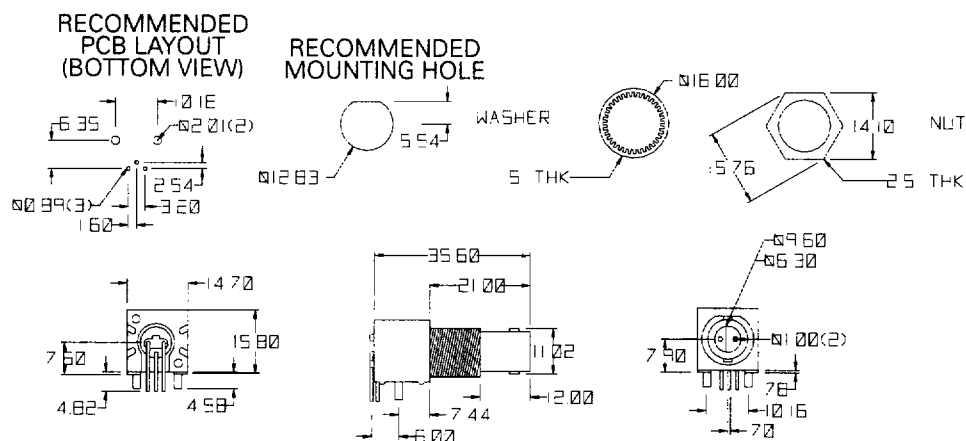


Low Profile available contact, A/D for Part Number.


TWIN (MALE-FEMALE) VALOX VERTICAL PC MOUNT




568-302-00/50Ω

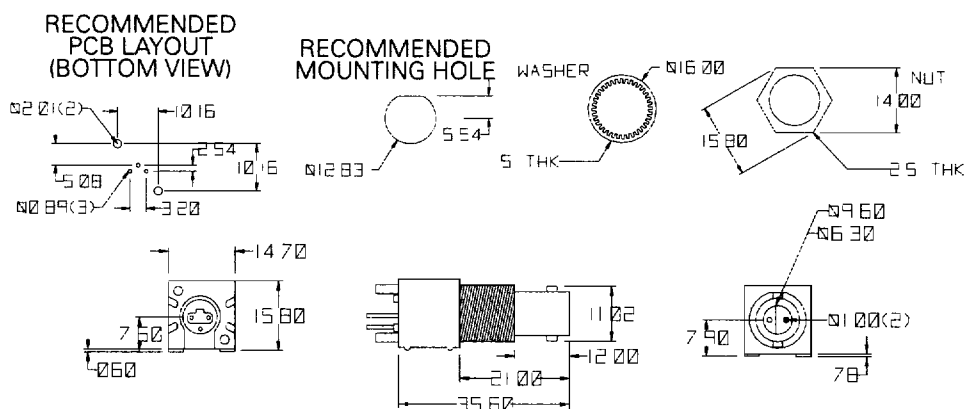

DECOUPLING CAPACITANCE FEMALE VALOX, R/A PC MOUNT



569-001-00Ω
***569-071-00/75Ω**

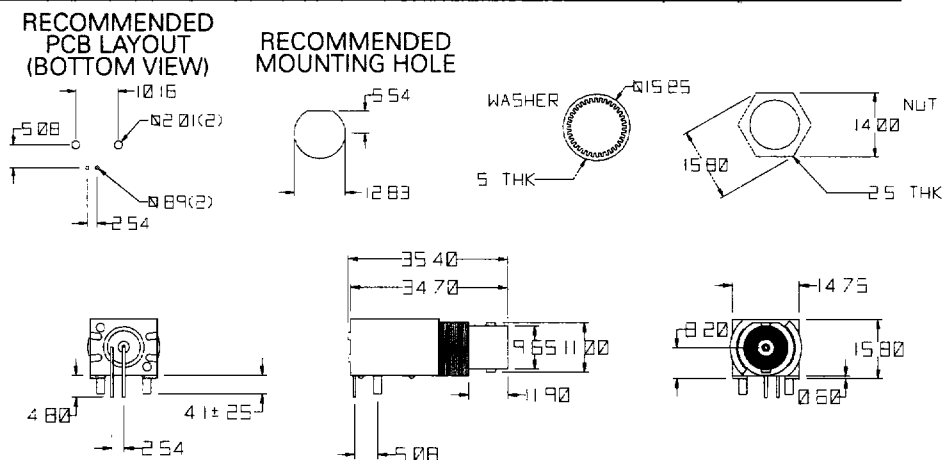

Capacitance 9400 PF; 1500 Volts Standard, Suffix -500 for 500 Volts. Low Profile available, contact A/D for Part Number.

*DIMENSIONS ARE FOR REFERENCE ONLY.



ELECTRONICS

PHONE (206) 851-8005
FAX (206) 851-8090



ELECTRONICS, Inc.

**10421 Burnham Dr. N.W., Bldg. 4,
Gig Harbor, WA, USA 98332**

**PHONE (206) 851-8005
FAX (206) 851-8090**