


Miniature LO-PROFILE Plug-In Power Transformers






Recognized Component
Underwriters Labs, Inc.

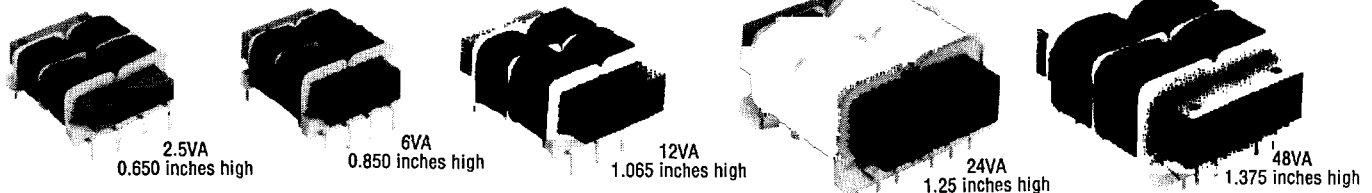

FIVE SIZES:

EWC's Lo-Profile, plug-in power transformers are designed for low height, critical pc board applications in semiconductor control and instrumentation. Interchangeable with those of other manufacturers, the units are for use in single, dual or reference dc supplies or isolated control circuits. Sizes 2, 6 and 12 are available encapsulated in form-fitting shells to protect against possible damage due to water-soluble or other fluxes as well as electrolytic corrosion experienced on open-type constructions.

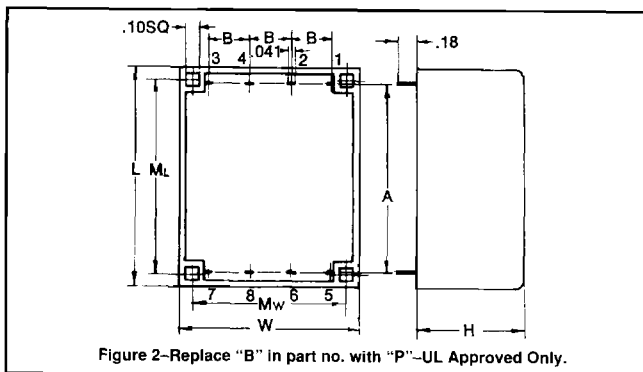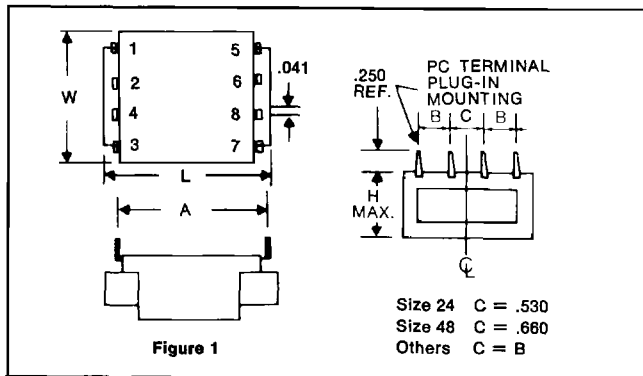

• INDICATES LIKE POLARITY

SIZE	FIG.	L	W	H	A	B	ML	MW	Oz.
2	1	1.875	1.562	0.650	1.600	0.375	—	—	5
6	1	1.875	1.562	0.850	1.600	0.375	—	—	7
12	1	2.500	2.000	1.065	2.000	0.500	—	—	11
24	1	2.875	2.250	1.250	1.900	0.600	—	—	15
48	1	3.125	2.500	1.375	2.180	0.600	—	—	21
2	2	2.030	1.635	0.785	1.600	0.375	1.795	1.340	—
6	2	2.030	1.635	0.950	1.600	0.375	1.795	1.340	—
12	2	2.675	2.126	1.185	2.000	0.500	2.440	1.850	—

EWC, Inc. reserves the right to make changes without notice in design and specifications in order to effect product improvement.



385 HIGHWAY 33, ENGLISHTOWN, NJ 07726
908/446-3110 FAX 908/446-5362

PART NO.	SIZE	SECONDARY RMS RATINGS	
		SERIES	PARALLEL
LP 10-250B23	2	10V C.T. @ 250mA	5V @ 500mA
LP 10-600B1	6	10V C.T. @ 600mA	5V @ 1.20A
LP 10-1200B2	12	10V C.T. @ 1.20A	5V @ 2.40A
LP 10-2400B89	24	10V C.T. @ 2.40A	5V @ 4.80A
LP 10-4800B90	48	10V C.T. @ 4.80A	5V @ 9.60A
LP 12-200B24	2	12.6V C.T. @ 200mA	6.3V @ 400mA
LP 12-450B3	6	12.6V C.T. @ 450mA	6.3V @ 900mA
LP 12-900B4	12	12.6V C.T. @ 900mA	6.3V @ 1.80A
LP 12-1900B91	24	12.6V C.T. @ 1.90A	6.3V @ 3.80A
LP 12-3800B92	48	12.6V C.T. @ 3.80A	6.3V @ 7.60A
LP 16-150B25	2	16V C.T. @ 150mA	8V @ 300mA
LP 16-350B5	6	16V C.T. @ 350mA	8V @ 700mA
LP 16-700B6	12	16V C.T. @ 700mA	8V @ 1.40A
LP 16-1500B93	24	16V C.T. @ 1.50A	8V @ 3.00A
LP 16-3000B94	48	16V C.T. @ 3.00A	8V @ 6.00A
LP 18-135B105	2	18V C.T. @ 135mA	9V @ 270mA
LP 18-325B106	6	18V C.T. @ 325mA	9V @ 650mA
LP 18-650B107	12	18V C.T. @ 650 mA	9V @ 1.30A
LP 18-1300B108	24	18V C.T. @ 1.30A	9V @ 2.60A
LP 18-2600B109	48	18V C.T. @ 2.60A	9V @ 5.20A
LP 20-125B26	2	20V C.T. @ 125mA	10V @ 250mA
LP 20-300B7	6	20V C.T. @ 300mA	10V @ 600mA
LP 20-600B8	12	20V C.T. @ 600mA	10V @ 1.20A
LP 20-1200B95	24	20V C.T. @ 1.20A	10V @ 2.40A
LP 20-2400B96	48	20V C.T. @ 2.40A	10V @ 4.80A
LP 24-100B27	2	24V C.T. @ 100mA	12V @ 200mA
LP 24-250B9	6	24V C.T. @ 250mA	12V @ 500mA
LP 24-500B10	12	24V C.T. @ 500mA	12V @ 1.00A
LP 24-1000B97	24	24V C.T. @ 1.00A	12V @ 2.00A
LP 24-2000B98	48	24V C.T. @ 2.00A	12V @ 4.00A
LP 28-90B115	2	28V C.T. @ 90 mA	14V @ 180mA
LP 28-215B116	6	28V C.T. @ 215mA	14V @ 430mA
LP 28-430B117	12	28V C.T. @ 430mA	14V @ 860mA
LP 28-850B118	24	28V C.T. @ 850mA	14V @ 1.70A
LP 28-1700B119	48	28V C.T. @ 1.70A	14V @ 3.40A
LP 30-85B125	2	30V C.T. @ 85mA	15V @ 170mA
LP 30-200B126	6	30V C.T. @ 200mA	15V @ 400mA
LP 30-400B127	12	30V C.T. @ 400mA	15V @ 800mA
LP 30-800B128	24	30V C.T. @ 800mA	15V @ 1.60A
LP 30-1600B129	48	30V C.T. @ 1.60A	15V @ 3.20A
LP 34-75B28	2	34V C.T. @ 75mA	17V @ 150mA
LP 34-170B11	6	34V C.T. @ 170mA	17V @ 340mA
LP 34-340B12	12	34V C.T. @ 340mA	17V @ 680mA
LP 34-700B99	24	34V C.T. @ 700mA	17V @ 1.40A
LP 34-1400B100	48	34V C.T. @ 1.40A	17V @ 2.80A
LP 40-60B29	2	40V C.T. @ 60mA	20V @ 120mA
LP 40-150B13	6	40V C.T. @ 150mA	20V @ 300mA
LP 40-300B14	12	40V C.T. @ 300mA	20V @ 600mA
LP 40-600B101	24	40V C.T. @ 600mA	20V @ 1.20A
LP 40-1200B102	48	40V C.T. @ 1.20A	20V @ 2.40A
LP 56-45B30	2	56V C.T. @ 45mA	28V @ 90mA
LP 56-100B15	6	56V C.T. @ 100mA	28V @ 200mA
LP 56-200B16	12	56V C.T. @ 200mA	28V @ 400mA
LP 56-425B103	24	56V C.T. @ 425mA	28V @ 850mA
LP 56-850B104	48	56V C.T. @ 850mA	28V @ 1.70A
LP 88-28B31	2	88V C.T. @ 28mA	44V @ 56mA
LP 88-65B17	6	88V C.T. @ 65mA	44V @ 130mA
LP 88-130B18	12	88V C.T. @ 130mA	44V @ 260mA
LP 120-20B32	2	120V C.T. @ 20mA	60V @ 40mA
LP 120-50B19	6	120V C.T. @ 50mA	60V @ 100mA
LP 120-100B20	12	120V C.T. @ 100mA	60V @ 200mA
LP 230-10B33	2	230V C.T. @ 10 mA	115V @ 20mA
LP 230-25B21	6	230V C.T. @ 25mA	115V @ 50mA
LP 230-50B22	12	230V C.T. @ 50mA	115V @ 100mA