

TEA5701

3 CHANNEL, LARGE BAND HEAD AMPLIFIER FOR VCR

PLAY-BACK MODE

- LOW NOISE PERFORMANCE
- LARGE BANDWIDTH (SVHS PROCESSING CAPABILITY)
- AUTOMATIC OFFSET CANCELLER BETWEEN TWO SELECTED HEADS
- RECORD AMPLIFIER INHIBITION DURING PLAYBACK
- DIRECT DRIVE OF COAXIAL CABLE (500Ω 100pF) OF PLAY-BACK OUTPUT


RECORD MODE

- INTEGRATED I/I CONVERTER WITH AUTO-MATIC CONTROL OF TRANSCONDUC-TANCE
- AUTOMATIC RECORD PLAY-BACK SWITCH-ING
- PLAYBACK INHIBITION DURING RECORD MODE
- AUTOMATIC PROTECTION OF RECORD AMPLIFIER AGAINST SHORT CIRCUIT

DESCRIPTION

The TEA5701 is an advanced one chip 3 heads record and playback amplifier for VCR.


PIN CONNECTIONS

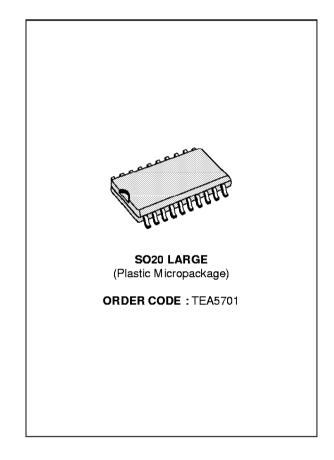

| | | _ |
|--------------------------------------|------|-------------------------------------|
| RECORDING OUTPUT CHANNEL 2 | 1 20 | RECORDING OUTPUT CHANNEL 1 |
| PLAY-BACK INPUT CHANNEL 2 | 2 19 | PLAY-BACK INPUT CHANNEL 1 |
| GROUND | 3 18 | CASCADE INPUT DECOUPLING |
| GROUND | 4 17 | gROUND |
| PLAY-BACK INPUT CHANNEL 3 | 5 16 | DC OFFSET CANCELLER CHANNEL 1 |
| DC OFFSET CANCELLER CHANNNEL 2 AND 3 | 6 15 | VOLTAGE SUPPLY FOR RECORDING MODE |
| CH2-CH3 SWITCH CONTROL | 7 14 | RECORDING INPUT |
| CH1-CH2 OR 3 SWITCH CONTROL | 8 10 | FEED-BACK OUTPUT FOR RECORDING MODE |
| PLAY-BACK OUTPUT | 9 12 | CURRENT LIMITATION INPUT |
| V _{CC} = 5V | 10 1 | gROUND |
| | | _ |

August 1992 1/8

BLOCK DIAGRAM

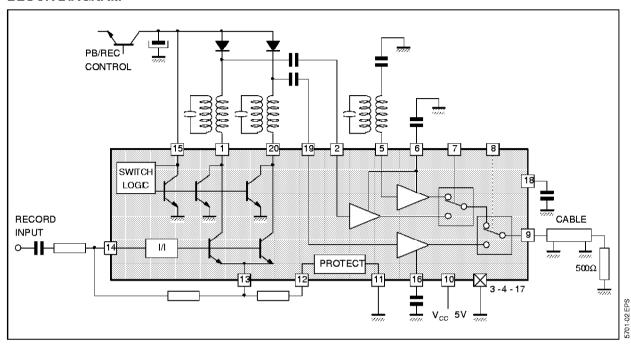

FUNCTIONAL DESCRIPTION

TEA5701 is intended for 3 heads VCR applications. It includes all the electrical functions necessary to achieve playback and record processing for VHS and SVHS applications (9MHz).

High performance technology allows very low noise levels (current and voltage). In playback mode a special feature suppresses the DC offset when switching two channels. Optimized play-back output stage gives to the TEA5701 large capability to drive directly a coaxial cable in order to reduce number of external components.

An automatic scanning of recording supply voltage permits that TEA5701 switches automatically in playback or in record mode. The switching threshold voltage from play-back to record and record to playback is fixed to a value which forbids high current peaking through the heads.

The recording amplifier includes a protection system which protects the IC and the application board against overheating in case of short circuit on the recording transconductance components.

The TEA5701 is fully protected against ESD.

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit |
|------------------|---------------------------|-----------------------|------|
| Vcc | Supply Voltage | 6 | V |
| V _{REC} | Supply Voltage | 15 | V |
| T _{stg} | Storage Temperature Range | -4 0, +150 | °C |

THERMAL DATA

| Symbol | Parameter | Value | Unit |
|-----------------------|-------------------------------------|-------|------|
| R _{th (j-a)} | Junction-ambient Thermal Resistance | 70 | °C/W |

SGS-THOMSON MICROELECTRONICS

ELECTRICAL OPERATING CHARACTERISTICS

All the operating characteristics are given for ambient temperature 25 ℃ unless otherwise specified.

Playback Mode

General conditions for play-back : $V_{CC} = 5V$, no load on play-back output

| Symbol | Parameter | Test Conditions | Min. | Тур. | Max. | Unit |
|-------------------|---|--|------|------|------|-----------------|
| Vcc | Supply Voltage | | 4.75 | 5 | 5.25 | ٧ |
| lcc | Current Supply | | | 45 | 60 | mA |
| G_PB | Play-back Gain | Sine Wave 400mVpp at 600khz on Pin 9 | 56 | 60 | 63 | dB |
| ∆ G _{PB} | Gain Difference Between Three Play-back Channels | Sine Wave 3.8MHz, 0.4mVpp on Pins 2 - 5 - 19 | | 0.3 | | dB |
| en | Equivalent Input Voltage Noise Level | Measured at 500kHz - CH1 Via Switching Transistor Pin 20 - CH2 Via Switching Transitor Pin 1 - CH3 Grounded | | 0.4 | | nV∕√Hz |
| in | Equivalent Input Current Noise Level | Measured at 500kHz - PB Inputs Pins 2 - 5 - 19 not Connected | | 3 | | p A ∕√Hz |
| CRT | Crosstalk | Sine Wave 3.8MHz, 400mVpp on Pin 9 For selected channel | | | - 40 | dB |
| | | - CH1 input, between pins 19 and 20 | | | | |
| | | - CH2 input, between pins 1 and 2 | | | | |
| | | - CH3 input, between pin 5 and ground | | | | |
| FLCPB | Playback Bandwidth Low Cut Off Frequency | Reference Signal Level : Sine Wave 3.8MHz 400mVpp - Play-back Input Capacitors 22nF (pins 2 - 6 - 19) - DC Offset Canceller Capacitor (pins 6 - 16-) 47 nF | | 20 | 100 | kHz |
| FHCPB | Playback Bandwidth High Cut Off Frequency | Same Conditions as Above | 8 | 9.5 | | MHz |
| C _{in} | Playback Input Capacitance Pins 2 - 5 - 19 | | | 50 | | pF |
| R _{in} | Playback Input Resistance Pins 2 - 5 - 19 | | | 600 | | Ω |
| VDCPB | DC Level on Play-back Output Pin 9 during Playback | With 500 Ω Load Resistor Between Pin 9 and Ground | 1.9 | 2.4 | 2.9 | V |
| ΔVDC | Head Switch Offset Pin 9 (all switches combinations) | | | | 50 | mV |
| SM | Second Harmonic on Playback Output Pin 9 | Sine Wave 3.8 MHz 400 mVpp with 500 Ω load Resistor | | - 43 | - 38 | dB |
| V_{sat} | Maximum Voltage on Pins 1 and 20 at Playback Mode | Input Current Pins 1 and 20 20mADC | | | 100 | mV |

ELECTRICAL OPERATING CHARACTERISTICS (continued)

Recording Mode

General conditions for recording mode : $V_{REC} = 12V$, $V_{CC} = 5V$, Load resistor 100Ω on pins 1 and 20

No load on play-back output Pin 9

Transconductance network defined by : $R1 = 5.1\Omega$ 1% pins 12-13

R2 = 1kΩ 1% pins 13-14 R3 = 750Ω 1% pin 14

| Symbol | Parameter | Test Conditions | Min. | Тур. | Max. | Unit |
|--------------------|---|--|------|------|------|------|
| V _{REC} | Recording Supply Voltage | | 9 | 12 | 12.6 | V |
| ICCREC | Current Supply from VREC | | | 50 | 60 | mA |
| Icci | Current Supply from V _{CC} | | | 30 | 37.5 | mA |
| V _{DCREC} | DC Level on Play-back Output Pin 9 | With 500 Ω Load Resistor between Pin 9 and Ground | 3.1 | 3.6 | 4.1 | V |
| | Maximum Recording Current on Each Channel | f = 1.6MHz | 40 | | | mApp |
| | Maximum Recording Current on Each Channel | f = 3.8MHz | 35 | | | mApp |
| g | Transconductance | $R1 = 5.1\Omega$ 0 %, $R2 = 1000\Omega$ 0 % $R3 = 750\Omega$ 0 %, $V_{\rm in} = 300 {\rm mVpp}$ Measured at 500kHz | | 132 | | mA/V |
| Δg | Recording Current Difference Between Pins 1 and 20 | Sine Wave 3.8MHz - recording = 30mA _{PP} | | | 0.5 | dB |
| REREC | Equivalent Input Resistance | | | 660 | | Ω |
| Rs | Output Resistance Pins 1 and 20 | $R1 = 5.1\Omega$ | | 100 | | kΩ |
| SHREC | Second Harmonic Pins 1 and 20 | Output Current on Each Output : 30mApp at 3.8MHz | | | - 38 | dB |
| FLCREC | Recording Bandwidth Low Cut Off Frequency | Reference Output Current 30mApp at 3.8MHz for - 3dB | | 20 | 100 | kHz |
| FHCREC | Recording Bandwidth High Cut Off Frequency | Reference Output Current 30mApp at 500kHz for - 3dB | 8 | 9.5 | | MHz |
| | Maximum Input Current Pin 12 | Pin 12 Connected to V _{REC} = 12V | | | 100 | mA |
| | Maximum Saturation Voltage on Pin12 | Input Current Pin 12 : 50mA | | 100 | 150 | mV |
| IM | Intermodulation | - Luminance = 30mApp 3.8MHz | | - 50 | | dB |
| | | - Chrominance = 7.5mApp, 600kHz Measured at 3.8MHz ± 600kHz | | | | |

Switching Levels

| Symbol | Parameter | Test Conditions | Min. | Тур. | Max. | Unit |
|-----------------|--|---|------|------|------|------|
| V _{H8} | Threshold Voltage for Head 1 Selection on Pin 8 | | 2.4 | | Vcc | ٧ |
| V_{L8} | Threshold Voltage for Head 2 or 3 Selection on Pin 8 | | 0 | | 1.5 | V |
| I _{H8} | Input Current Pin 8 for H1 Selected | Pin 8 Connected to V _{CC} | | | 50 | μА |
| l _{L8} | Output Current Pin 8 for H2 or 3 Selected | Pin 8 Connected to Ground | | | - 50 | μА |
| V _{H7} | Threshold Voltage for Head 2 Selection on Pin 7 | | 2.4 | | Vcc | V |
| V_{L7} | Threshold Voltage for Head 3 Selection on Pin 7 | | 0 | | 1.5 | V |
| l _{H7} | Input Current Pin 7 for Head 2 Selected | Pin 7 Connected to V _{CC} | | | 50 | μΑ |
| l _{L7} | Output Current Pin 7 for Head 3 Selected | Pin 7 Connected to Ground | | | - 50 | μА |
| | Switching Time from H1 Selected to H2 Selected | Switching Pulse from 5 to 0V Applied Pin 8 | | 250 | 500 | ns |
| | Switching Time from H2 Selected to H1 Selected | Switching Pulse from 0 to 5V Applied Pin 8 | | 250 | 500 | ns |


5701-05.TBL



ELECTRICAL CHARACTERITICS (continued) **Switching Levels**


| Symbol | Parameter | Test Conditions | Min. | Тур. | Max. | Unit |
|--------|--|---|------|------|------|------|
| VRPB | Recording Supply Voltage Threshold (pin 15) for Switching from Record to Playback | | 0.15 | 0.3 | 0.5 | ٧ |
| VPBR | Recording Supply Voltage Threshold (pin 15) for Switching from Playback to record | | 0.25 | 0.4 | 0.6 | V |
| | Delay Time for Suppression of Play-back Output Signal on Pin 9 (playback to record) | See Measurement Conditions End of Paragraph | | 30 | | μs |
| | Delay Time for Presence of Playback Output Signal on Pin 9 (record to play-back) | See Measurements Conditions End of Paragraph | | 20 | | ms |
| | Delay Time for Suppression of Recording Signals Pins 1 and 20 (record to playback) | See Measurements Conditions End of Paragraph | | 4 | | ms |
| | Delay Time for Suppression of Recording Signals Pin 1 and 20 (playback to record) | See Measurements Conditions End of Paragraph | | 200 | | μs |
| SVR | Supply Voltage Rejection | Gain Measure Made Between Playback Output Pin 9 and V _{CC} (0.5mVpp on Pin 10) | 15 | 20 | 25 | dB |

Test Conditions for Measuring Delay Times (play-back to record and vice versa)

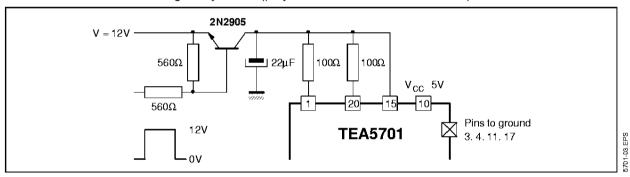

INPUTS/OUTPUTS EQUIVALENT INTERNAL DIAGRAM

Pin 1 And 20

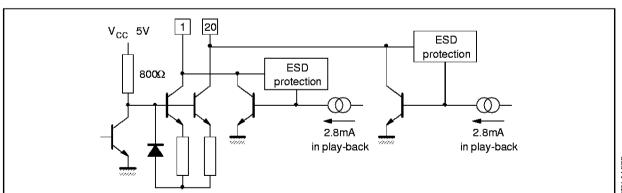


5701-04.EPS


5701-06.TBL

INPUTS/OUTPUTS EQUIVALENT INTERNAL DIAGRAM (continued)


Pin 15




Pins 2 - 5 - 19 - 18




Pins 6 - 16




Pins 7 - 8



Pin 9




Pin 12




INPUTS/OUTPUTS EQUIVALENT INTERNAL DIAGRAM (continued)


Pin 13



Pin 14




TYPICAL APPLICATION

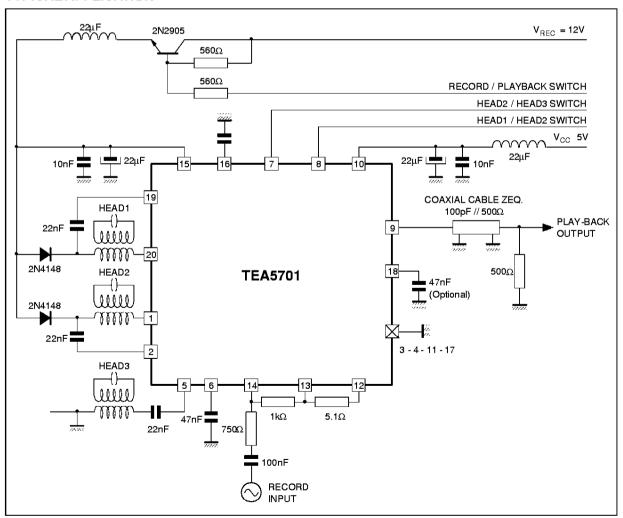

PACKAGE MECHANICAL DATA

SO20 LARGE - PLASTIC MICROPACKAGE

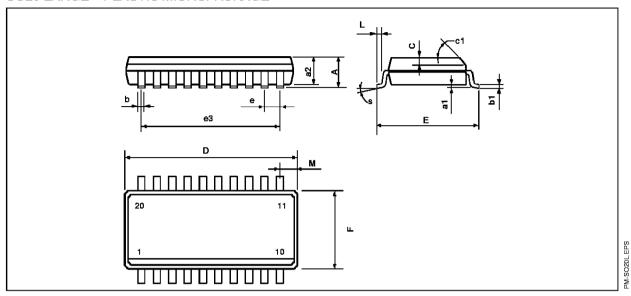

| Dimensions | • | Millimeters | | | Inches | |
|------------|------|-------------|-------|--------|--------|-------|
| Dimensions | Min. | Тур. | Max. | Min. | Тур. | Max. |
| Α | | | 2.65 | | | 0.104 |
| a1 | 0.1 | | 0.2 | 0.004 | | 0.008 |
| a2 | | | 2.45 | | | 0.096 |
| b | 0.35 | | 0.49 | 0.014 | | 0.019 |
| b1 | 0.23 | | 0.32 | 0.009 | | 0.013 |
| С | | 0.5 | | | 0.020 | |
| c1 | | | 45° | (typ.) | | |
| D | 12.6 | | 13.0 | 0.496 | | 0.510 |
| E | 10 | | 10.65 | 0.394 | | 0.419 |
| е | | 1.27 | | | 0.050 | |
| e3 | | 11.43 | | | 0.450 | |
| F | 7.4 | | 7.6 | 0.291 | | 0.300 |
| L | 0.5 | | 1.27 | 0.020 | | 0.050 |
| М | | | 0.75 | | | 0.030 |
| S | | | 8º (| max.) | | |

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No licence is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

Purchase of I²C Components of SGS-THOMSON Microelectronics, conveys a license under the Philips I²C Patent. Rights to use these components in a I²C system, is granted provided that the system conforms to the I²C Standard Specifications as defined by Philips.

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.

