MORNSUN®


SINGLE HIGH SPEED RS485 ISOLATION TRANSCEIVER MODULE (AUTOMATIC SWITCHING)

—TD301D485H-A(3.3V Power supply) TD501D485H-A(5.0V Power supply)



RoHS

PART NUMBER SYSTEM



FEATURES

- I Baud rate high up to 115200bps
- I Connect up to 32 nodes on one bus
- I 2500VDC isolation input and output
- I Integrated high efficiency isolated DC/DC converter
- I Operating temperature range: -40℃~ +85℃
- I ESD protection, perfect EMC recommend circuit
- I Automatic transceiver switching

GENERAL DESCRIPTION

Single high speed RS485 isolation transceiver module TD301D485H-A/ TD501D485H-A series are RS485 transceiver module with integrated isolated power, Signal isolated chip and the bus protection device.

Product's main function is to convert logic level to difference level of the 485 agreement, and it implements the function of signal isolation. Products is with isolation power. It can achieve 2500 VDC electrical isolation and have the function of ESD protection and automatic switch to send and receive. It does not need to control through the CON pin, and reduce the complexity of the design. Product can be easily embedded user equipment, makes the equipment easily implement connection of 485 protocol network.

SELECTION GUIDE	
Model	Power Input
TD301D485H-A	3.17V~3.45V
TD501D485H-A	4.75V~5.25V

ELECTRICAL CHARACTERISTICS				
Input Parameters Of Power	Static current	≤40mA		
Supply	Power dissipation	≤0.2W		
January Davids at any	Serial interface	Compatible with the UART control port of +5V and +3.3V		
Input Parameters	Pin current	I _{TXD} ≤2 mA;I _{RXD} ≤2 mA		
Output Parameters	485 Bus interface	Standard interface RS485 , pull-up and pull-down resistor, whose value is 4.7K Ω ,have been set to A/B line.		

TRANSMISSION CHARACTERISTICS					
Transmission Rate	Maximum 115.2Kbps				
The Number of Nodes	Connect up to 32 node	Connect up to 32 nodes on one bus			
Truth Table		Input	Output		
	Conding Status	TXD	A	В	Line state
	Sending Status	1	1	0	Normal
		0	0	1	Normal
		Input	Output		
	Pagairing Status	A-B	RXD		
	Receiving Status	0.2V	1		
		-0.2V	0		


ISOLATION CHARACTERISTICS				
Electrical Isolation	Two-Port isolation(input and output)			
Isolation Voltage	tage 2.5KVDC(Tested for 1minute and leakage current < 5mA, humidity <95%)			

EMC SPECIFICATIONS					
EMI	CE	CISPR22/EN55022	CLASS A		(External Circuit Refer to Figure 1-②)
CIVII	RE	CISPR22/EN55022	CLASS A		(External Circuit Refer to Figure 1-②)
	ESD	IEC/EN61000-4-2	Contact ±4KV	perf. Criteria B	
EMS	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A	
EFT	FFT	IEC/EN61000-4-4	Power Port ±2KV	perf. Criteria B	(External Circuit Refer to Figure 1-①)
	EF1	IEC/EN61000-4-4	Signal Port ±1KV	perf. Criteria B	(External Circuit Refer to Figure 1-③)
EMS	Surge	IEC/EN61000-4-5	Power Port ±1KV/2KV	perf.Criteria B	(External Circuit Refer to Figure 1-①)
		IEC/EN61000-4-5	Signal Port ±4KV/6KV	perf. Criteria B	(External Circuit Refer to Figure 1-③)
	CS	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A	

OTHER CHARACTERISTICS			
Environmental Temperature	Operating temperature:-40°C ~+85°C		
	Transport and storage temperature: -50 °C ~+105 °C		
Operating Humidity	10%~90%		
Size	19.9*16.9*7.05 (L*W*H) (Unit:mm)		
Weight	Approx. 4g		
Application Environment	The presence of dust, fierce vibration, impulsion and corrosive gas may cause damage to the product		

Note:1. All specifications measured at TA=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.

EMC RECOMMENDED CIRCUIT

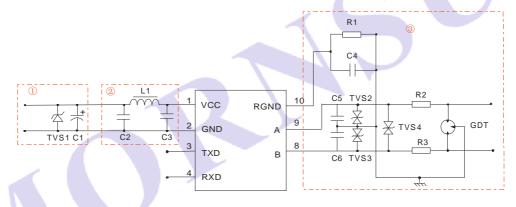

(Figure 1)overall plan(detail parameter refer to item)

Recommended external circuit parameters:

Model	TD301D485H-A TD501D485H-A			
C1	220uF/10V(Electrolytic capacitor)			
TVS1	SMCJ5.0A SMCJ6.5A			
C2,C3	1uF/	1uF/25V		
L1	10	10μΗ		
C4	1nF/2KV			
C5,C6	100pF/100V			
R1	1ΜΩ			
TVS2,TVS3, TVS4	SMBJ15CA			
R2,R3	10Ω/2W(Wire-\	10Ω/2W(Wire-wound resistor)		
GDT	B3D090L-C			

APPLICATION NOTE

- 1. Please read the user manual carefully before using. If any question please contact our technical support department.
- 2. Please do not use this product in hazardous area.
- 3. To avoid invalid explosion protection function, or any failure, users disassemble this product is forbidden.

All specifications stated in this datasheet are subject to the above listed models only. For specifications of non-standard models, please contact our technica support team.


AFTER SERVICE

- 1. Products are carefully inspected and quality control during production and before shipment. If they operated abnormally or there were anything wrong, please contact our agent where purchased or MORNSUN FAE as soon as possible.
- 2. MORNSUN warranty our product for 3 years from manufacturing date. During this peroid, MORNSUN will repair or replace the product if product was found to have manufacturing defect.


APPLICATION GUIDE


See the communication interface product application guide.

TYPICAL APPLICATIONS CIRCUIT DIAGRAM

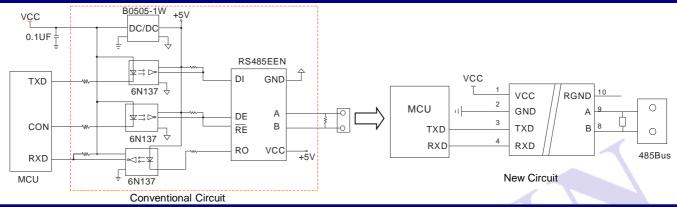

OUTLINE DIMENSIONS, RECOMMENDED FOOTPRINT & PACKAGING

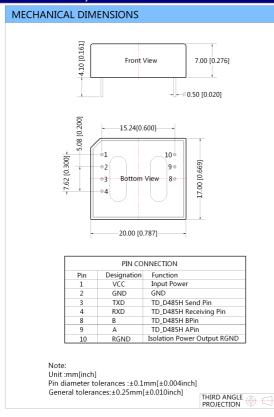

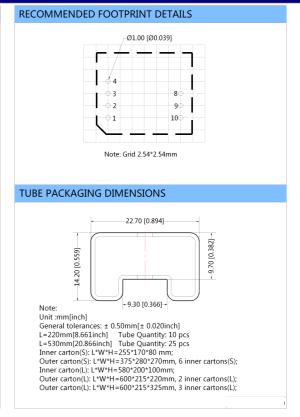

Note:

- 1. All specifications measured at Ta=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
- 2. In this datasheet, all the test setup and methods are based on our corporate standards.
- 3. All characteristics are meant for listed model, non-standard models may perform differently, you can contact MORNSUN FAE for more details.
- 4. Contact us for your specific requirement.
- 5. Specifications are subject to change without prior notice.

MORNSUN Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui development center, Science Ave., Guangzhou Science City, Luogang district, Guangzhou, P.R.China.

Tel: 86-20-38601850 Fax:86-20-38601272 E-mail: info@mornsun.cn Http://www.mornsun-power.com