Triple Schmitt-Trigger Inverter

The NL37WZ14 is a high performance triple inverter with Schmitt-Trigger inputs operating from a 1.65 to 5.5 V supply.

Pin configuration and function are the same as the NL37WZ04, but the inputs have hysteresis, and with its Schmitt trigger function, the NL37WZ14 can be used as a line receiver which will receive slow input signals. The NL37WZ14 is capable of transforming slowly changing input signals into sharply defined, jitter–free output signals. In addition, it has a greater noise margin than conventional inverters. The NL37WZ14 has hysteresis between the positive–going and the negative–going input thresholds (typically 1.0 V) which is determined internally by transistor ratios and is essentially insensitive to temperature and supply voltage variations.

Features

- Designed for 1.65 V to 5.5 V V_{CC} Operation
- Over Voltage Tolerant Inputs and Outputs
- LVTTL Compatible Interface Capability with 5 V TTL Logic with V_{CC} = 3 V
- LVCMOS Compatible
- 24 mA Balanced Output Sink and Source Capability
- Near Zero Static Supply Current Substantially Reduces System Power Requirements
- Current Drive Capability is 24 mA at the Outputs
- Chip Complexity: FET = 94
- Pb-Free Package is Available




Figure 1. Pinout (Top View)




Figure 2. Logic Symbol




ON Semiconductor®

http://onsemi.com

MARKING DIAGRAM



US8 US SUFFIX CASE 493



A = Device Code

I = Date Code*

= Pb-Free Package

(Note: Microdot may be in either location)

*Date Code orientation may vary depending upon manufacturing location.

PIN ASSIGNMENT

1	IN A1
2	OUT Y 3
3	IN A2
4	GND
5	OUT Y2
6	IN A3
7	OUT Y1
8	V _{CC}

FUNCTION TABLE

A Input	▼ Output
L	Н
Н	L

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

MAXIMUM RATINGS

Symbol	Parameter	Value	Unit	
V _{CC}	DC Supply Voltage		-0.5 to +7.0	V
VI	DC Input Voltage		-0.5 to +7.0	V
V _O	DC Output Voltage		-0.5 to +7.0	V
I _{IK}	DC Input Diode Current	V _I < GND	-50	mA
I _{OK}	DC Output Diode Current	V _O < GND	-50	mA
I _O	DC Output Sink Current		±50	mA
I _{CC}	DC Supply Current per Supply Pin		± 100	mA
I _{GND}	DC Ground Current per Ground Pin		±100	mA
T _{STG}	Storage Temperature Range		-65 to +150	°C
TL	Lead Temperature, 1 mm from Case for 10 Seconds		260	°C
TJ	Junction Temperature under Bias		+ 150	°C
$\theta_{\sf JA}$	Thermal Resistance	(Note 1)	250	°C/W
P _D	Power Dissipation in Still Air at 85°C		250	mW
MSL	Moisture Sensitivity		Level 1	
F _R	Flammability Rating	Oxygen Index: 28 to 34	UL 94 V-0 @ 0.125 in	
V _{ESD}	ESD Withstand Voltage	Human Body Model (Note 2) Machine Model (Note 3) harged Device Model (Note 4)	> 2000 > 200 N/A	V

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

- 1. Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2-ounce copper trace with no air flow.
- 2. Tested to EIA/JESD22-A114-A.
- 3. Tested to EIA/JESD22-A115-A.
- 4. Tested to JESD22-C101-A.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter			Max	Unit
V _{CC}	Supply Voltage	Operating Data Retention Only	2.3 1.5	5.5 5.5	V
V _I	Input Voltage	(Note 5)	0	5.5	V
V _O	Output Voltage	(HIGH or LOW State)	0	5.5	V
T _A	Operating Free-Air Temperature		-40	+85	°C
Δt/ΔV	Input Transition Rise or Fall Rate	$V_{CC} = 2.5 \text{ V} \pm 0.2 \text{ V}$ $V_{CC} = 3.0 \text{ V} \pm 0.3 \text{ V}$ $V_{CC} = 5.0 \text{ V} \pm 0.5 \text{ V}$	0 0 0	No Limit No Limit No Limit	ns/V

^{5.} Unused inputs may not be left open. All inputs must be tied to a high- or low-logic input voltage level.

DEVICE ORDERING INFORMATION

Device Order Number	Package Type	Tape and Reel Size
NL37WZ14US	US8	178 mm, 3000 Units / Tape & Reel
NL37WZ14USG	US8 (Pb-Free)	178 mm, 3000 Units / Tape & Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

DC CHARACTERISTICS

			V _{CC}	T _A	T _A = 25°C		-40°C ≤	$T_A \leq 85^{\circ}C$	
Symbol	Parameter	Condition	(V)	Min	Тур	Max	Min	Max	Unit
V _T +	Positive Input Threshold		2.3	1.0	1.5	1.8	1.0	1.8	V
	Voltage		2.7	1.2	1.7	2.0	1.2	2.0	
			3.0	1.3	1.9	2.2	1.3	2.2	
			4.5	1.9	2.7	3.1	1.9	3.1	
			5.5	2.2	3.3	3.6	2.2	3.6	
V _T -	Negative Input Threshold Voltage		2.3	0.4	0.75	1.15	0.4	1.15	V
			2.7	0.5	0.87	1.4	0.5	1.4	
			3.0	0.6	1.0	1.5	0.6	1.5	
			4.5	1.0	1.5	2.0	1.0	2.0	
			5.5	1.2	1.9	2.3	1.2	2.3	
V _H	Input Hysteresis Voltage		2.3	0.25	0.75	1.1	1.25	1.1	V
			2.7	0.3	0.83	1.15	0.3	1.15	
			3.0	0.4	0.93	1.2	0.4	1.2	
			4.5	0.6	1.2	1.5	0.6	1.5	
			5.5	0.7	1.4	1.7	0.7	1.7	
V _{OH}	High-Level Output Voltage	I _{OH} = -100 μA	1.65 to 5.5	V _{CC} −0.1	V_{CC}		V _{CC} -0.1		V
	$V_{IN} = V_{IH}$ or V_{IL}	$I_{OH} = -3 \text{ mA}$	1.65	1.29	1.52		1.29		
		$I_{OH} = -8 \text{ mA}$	2.3	1.9	2.1		1.9		
		$I_{OH} = -12 \text{ mA}$	2.7	2.2	2.4		2.2		
		$I_{OH} = -16 \text{ mA}$	3.0	2.4	2.7		2.4		
		$I_{OH} = -24 \text{ mA}$	3.0	2.3	2.5		2.3		
		$I_{OH} = -32 \text{ mA}$	4.5	3.8	4.0		3.8		
V _{OL}	Low-Level Output Voltage	I _{OL} = 100 μA	1.65 to 5.5			0.1		0.1	V
	$V_{IN} = V_{IH}$ or V_{IL}	I _{OL} = 4 mA	1.65		0.08	0.24		0.24	
		I _{OL} = 8 mA	2.3		0.2	0.3		0.3	
		I _{OL} = 12 mA	2.7		0.22	0.4		0.4	
		I _{OL} = 16 mA	3.0		0.28	0.4		0.4	
		I _{OL} = 24 mA	3.0		0.38	0.55		0.55	
		I _{OL} = 32 mA	4.5		0.42	0.55		0.55	
I _{IN}	Input Leakage Current	$V_{IN} = V_{CC}$ or GND	0 to 5.5			±0.1		±1.0	μΑ
I _{OFF}	Power Off-Output Leakage Current	V _{OUT} = 5.5 V	0			1		10	μΑ
I _{CC}	Quiescent Supply Current	V _{IN} = V _{CC} or GND	5.5			1		10	μΑ


AC ELECTRICAL CHARACTERISTICS (Input $t_r = t_f = 3.0 \text{ ns}$)


			V _{CC}	T _A = 25°C		T _A = 25°C		$-40^{\circ}C \leq T_{A} \leq 85^{\circ}C$		
Symbol	Parameter	Condition	(V)	Min	Тур	Max	Min	Max	Unit	
t _{PLH}	Propagation Delay	R_L = 1 M Ω , C_L = 15 pF	2.5 ± 0.2	1.8	4.3	7.4	1.8	8.1	ns	
t _{PHL}	Input A to Y (Figure 3 and 4)	R_L = 1 M Ω , C_L = 15 pF	3.3 ± 0.3	1.5	3.3	5.0	1.5	5.5		
	,	$R_L = 500 \ \Omega, \ C_L = 50 \ pF$		1.8	4.0	6.0	1.8	6.6		
		$R_L = 1 \text{ M}\Omega, C_L = 15 \text{ pF}$	5.0 ± 0.5	1.0	2.7	4.1	1.0	4.5		
		$R_L = 500 \Omega, C_L = 50 pF$		1.2	3.2	4.9	1.2	5.4		

CAPACITIVE CHARACTERISTICS

Symbol	Parameter	Condition	Typical	Unit
C _{IN}	Input Capacitance	$V_{CC} = 5.5 \text{ V}, V_I = 0 \text{ V or } V_{CC}$	2.5	pF
C _{PD}	Power Dissipation Capacitance	10 MHz, V _{CC} = 3.3 V, V _I = 0 V or V _{CC}	11	pF
	(Note 6)	10 MHz, V _{CC} = 5.0 V, V _L = 0 V or V _{CC}	12.5	

^{6.} C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation: $I_{CC(OPR)} = C_{PD} \cdot V_{CC} \cdot f_{in} + I_{CC} \cdot C_{PD}$ is used to determine the no–load dynamic power consumption; $P_D = C_{PD} \cdot V_{CC}^2 \cdot f_{in} + I_{CC} \cdot V_{CC}$.





*C_L includes all probe and jig capacitances.

A 1-MHz square input wave is recommended for propagation delay tests.

Figure 3. Switching Waveforms

Figure 4. Test Circuit



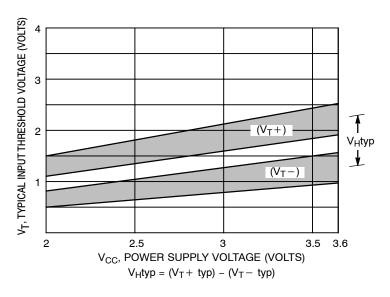


Figure 5. Typical Input Threshold, $V_{\mathsf{T}^+}, V_{\mathsf{T}^-}$ versus Power Supply Voltage



(a) A Schmitt-Trigger Squares Up Inputs With Slow Rise and Fall Times




(b) A Schmitt-Trigger Offers Maximum Noise Immunity

Figure 6. Typical Schmitt-Trigger Applications

PACKAGE DIMENSIONS

US8 **US SUFFIX** CASE 493-02 **ISSUE A**

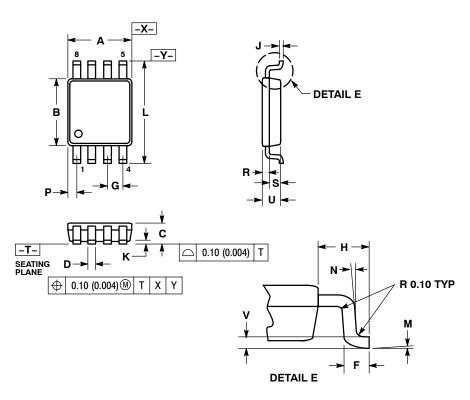


- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: MILLIMETERS.
 3. DIMENSION "A" DOES NOT INCLUDE MOLD FLASH, PROTRUSION OR GATE BURR. MOLD FLASH. PROTRUSION AND GATE BURR SHALL NOT EXCEED 0.140 MM
- BURH SHALL NOT EXCEED 0.140 MM (0.0055") PER SIDE.

 4. DIMENSION "B" DOES NOT INCLUDE INTER-LEAD FLASH OR PROTRUSION. INTER-LEAD FLASH AND PROTRUSION SHALL NOT E3XCEED 0.140 (0.0055") PER
- SIDE.
 LEAD FINISH IS SOLDER PLATING WITH
 THICKNESS OF 0.0076–0.0203 MM.
 (300–800 ").
 ALL TOLERANCE UNLESS OTHERWISE
 SPECIFIED ±0.0508 (0.0002 ").

	MILLIN	IETERS	INC	HES	
DIM	MIN	MAX	MIN	MAX	
Α	1.90	2.10	0.075	0.083	
В	2.20	2.40	0.087	0.094	
С	0.60	0.90	0.024	0.035	
D	0.17	0.25	0.007	0.010	
F	0.20	0.35	0.008	0.014	
G	0.50	BSC	0.020	BSC	
Н	0.40	0.40 REF		REF	
J	0.10	0.18	0.004	0.007	
K	0.00	0.10	0.000	0.004	
L	3.00	3.20	0.118	0.126	
М	0 °	6°	0 °	6 °	
N	5 °	10 °	5 °	10 °	
P	0.23	0.34	0.010	0.013	
R	0.23	0.33	0.009	0.013	
S	0.37	0.47	0.015	0.019	
U	0.60	0.80	0.024	0.031	
V	0.12	BSC	0.005 BSC		

SOLDERING FOOTPRINT*



*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and was registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 61312, Phoenix, Arizona 85082-1312 USA Phone: 480-829-7710 or 800-344-3860 Toll Free USA/Canada Fax: 480-829-7709 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800–282–9855 Toll Free USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center 2–9–1 Kamimeguro, Meguro–ku, Tokyo, Japan 153–0051 Phone: 81–3–5773–3850

ON Semiconductor Website: http://onsemi.com

Order Literature: http://www.onsemi.com/litorder

For additional information, please contact your local Sales Representative.