

# QUICKSWITCH<sup>®</sup> PRODUCTS 2.5V / 3.3V 16-BIT HIGH BANDWIDTH BUS SWITCH

## IDTQS32XVH2245

## FEATURES:

- N channel FET switches with no parasitic diode to Vcc
  - Isolation under power-off conditions
  - No DC path to Vcc or GND
  - 5V tolerant in OFF and ON state
- 5V tolerant I/Os
- · Flat Row characteristics over operating range
- Rail-to-rail switching 0 5V
- Bidirectional dataflow with near-zero delay: no added ground bounce
- · Excellent Row matching between channels
- Vcc operation: 2.3V to 3.6V
- High bandwidth
- · LVTTL-compatible control Inputs
- Undershoot Clamp Diodes on all switch and control Inputs
- · Low I/O capacitance, 4pF typical
- 25Ω resistors for low noise and line matching
- Available in 40-pin QVSOP package

## APPLICATIONS:

- · Hot-swapping
- Low distortion analog switch
- Replaces mechanical relay
- ATM 25/155 switching

## FUNCTIONAL BLOCK DIAGRAM

#### Ao A 1 A2 A3 A4 Α5 Α6 A7 B0 B1 B2 B3 B4 B5 B6 B7 A10 A11 A12 A13 A14 A15 A8 OF<sub>2</sub> B8 B9 B10 B11 B12 B13 B14

1

The IDT logo is a registered trademark of Integrated Device Technology, Inc.

# DESCRIPTION:


The QS32XVH2245 HotSwitch is a high bandwidth, 16-bit bus switch. The QS32XVH2245, with  $25\Omega$  ON resistance and 1.35ns propagation delay, is ideal for line matching and low noise environments. The switches can be turned ON under the control of the LVTTL-compatible Output Enable ( $\overline{OEx}$ ) signal for bidirectional data flow with no added delay or ground bounce. In the ON state, the switches can pass signals up to 5V. In the OFF state, the switches offer very high impedence at the terminals.

The combination of small propagation delay, high OFF impedance, and over-voltage tolerance makes the QS32XVH2245 ideal for hot-swapping applications.

The QS32XVH2245 is characterized for operation from -40°C to +85°C.

#### **INDUSTRIAL TEMPERATURE RANGE**

## PINCONFIGURATION

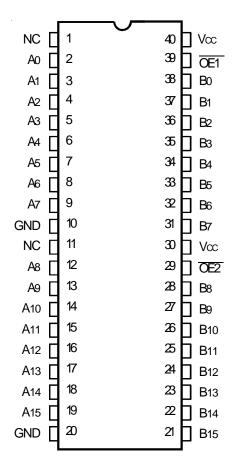

QVSOP TOP VIEW ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

Symbol	Description	Max	Unit
VTERM <sup>(2)</sup>	SupplyVoltage to Ground	-0.5 to +4.6	V
VTERM <sup>(3)</sup>	DC Switch Voltage Vs	-0.5 to +5.5	V
VTERM <sup>(3)</sup>	DC Input Voltage VIN	-0.5 to +5.5	V
VAC	AC Input Voltage (pulse width ≤20ns)	-3	V
Ιουτ	DC Output Current (max. sink current/pin)	120	mA
Tstg	Storage Temperature	-65 to +150	°C

NOTES:

 Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

2. Vcc terminals.

3. All terminals except  $V\mbox{cc}$  .

#### CAPACITANCE (TA = +25°C, F = 1MHz, VIN = 0V, VOUT = 0V)

Symbol	Parameter <sup>(1)</sup>	Тур.	Max.	Unit
CIN	Control Inputs	3	5	pF
CI/O	Quickswitch Channels (Switch OFF)	4	6	pF
CI/O	Quickswitch Channels (Switch ON)	8	12	pF

NOTE:

1. This parameter is guaranteed but not production tested.

### **PIN DESCRIPTION**

Pin Names	Description
ŌĒx	Output Enable
Ax	Data I/Os
Вх	Data I/Os

### FUNCTION TABLE<sup>(1)</sup>

ŌĒx	Function
Н	Disconnected
L	Connect (Ax = Bx)

NOTE:

1. H = HIGH Voltage Level

L = LOW Voltage Level

## DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:


Industrial: TA =  $-40^{\circ}$ C to  $+85^{\circ}$ C, VCC =  $3.3V \pm 0.3V$ 

Symbol	Parameter	Test C	Test Conditions		Min.	Тур. <sup>(1)</sup>	Max.	Unit
Vih	Input HIGH Voltage	Guaranteed Logic HIGH	Vcc = 2.3V to 2.7	V	1.7	_	_	V
		for Control Inputs	Vcc = 2.7V to 3.6	V	2	-	-	
Vil	Input LOW Voltage	Guaranteed Logic LOW	Vcc = 2.3V to 2.7	V	_	_	0.7	V
		for Control Inputs	Vcc = 2.7V to 3.6	V	_	_	0.8	
lin	Input Leakage Current (Control Inputs)	$0V \le VIN \le VCC$		_	_	±1	μA	
loz	Off-State Current (Hi-Z)	$0V \le VOUT \le 5V$ , Switches OFF		—	-	±1	μA	
IOFF	Data Input/Output Power Off Leakage	VIN or VOUT OV to 5V, VCC =	VIN or VOUT 0V to 5V, VCC = 0V		—	—	±1	μA
		Vcc = 2.3V	VIN = 0V	ION = 30mA	18	27	39	
Ron	Switch ON Resistance	Typical at Vcc = 2.5V	VIN = 1.7V	Ion = 15mA	18	28	41	Ω
		VCC = 3V	VIN = 0V	Ion = 30mA	18	25	38	
			VIN = 2.4V	Ion = 15mA	18	26	40	

NOTE:

1. Typical values are at Vcc = 3.3V and TA = 25°C.

## TYPICAL ON RESISTANCE vs VIN AT Vcc = 3.3V

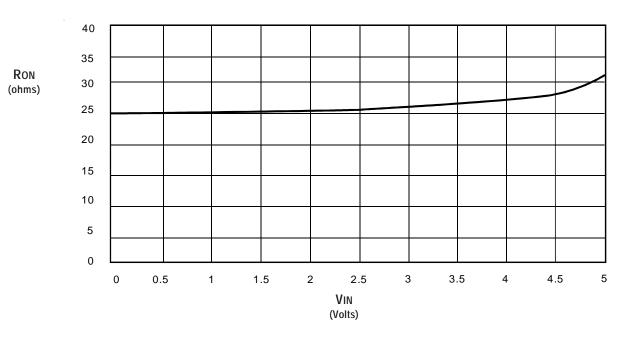

## POWER SUPPLY CHARACTERISTICS

Symbol	Parameter	Test Conditions <sup>(1)</sup>	Min.	Тур.	Max.	Unit
lcco	Quiescent Power Supply Current	Vcc = Max., VIN = GND or Vcc, f = 0		2	6	mA
ΔICC	Power Supply Current (2.3) per Input HIGH	Vcc = Max., VIN = 3V, f = 0 per Control Input		_	30	μA
ICCD	Dynamic Power Supply Current per Output Enable Control Input <sup>(4)</sup>	Vcc = 3.3V, A and B Pins Open, Control Inputs Toggling @ 50% Duty Cycle	puts See Typical ICCD vs Enable Frequency graph		graph below	

NOTES:


1. For conditions shown as Min. or Max., use the appropriate values specified under DC Electrical Characteristics.

2. Per input driven at the specified level. A and B pins do not contribute to  $\Delta$ Icc.

3. This parameter is guaranteed but not tested.

4. This parameter represents the current required to switch internal capacitance at the specified frequency. The A and B inputs do not contribute to the Dynamic Power Supply Current. This parameter is guaranteed but not production tested.

TYPICAL ICCD vs ENABLE FREQUENCY CURVE AT VCC = 3.3V

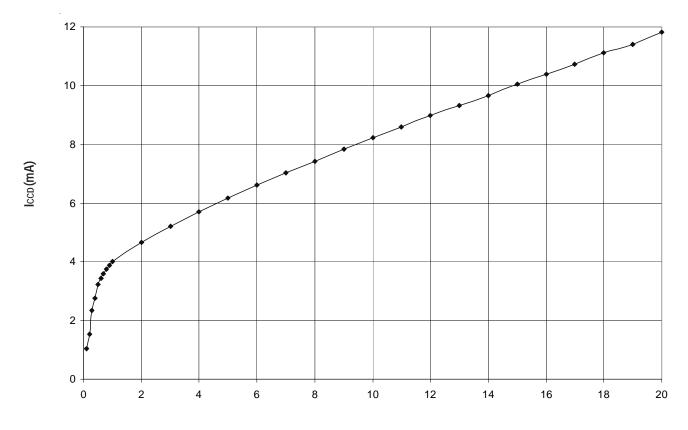

**ENABLE FREQUENCY (MHz)** 

# SWITCHING CHARACTERISTICS OVER OPERATING RANGE

 $T_A = -40^{\circ}C \text{ to } +85^{\circ}C$ 

		$Vcc = 2.5 \pm 0.2V^{(1)}$		$Vcc = 3.3 \pm 0.3 V^{(1)}$		
Symbol	Parameter	Min. <sup>(4)</sup>	Max.	Min. <sup>(4)</sup>	Max.	Unit
tPLH .	Data Propagation Delay <sup>(2,3)</sup>		0.9	—	1.35	ns
<b>t</b> PHL	Ax to/from Bx					
tPZL	Switch Turn-On Delay	1.5	9	1.5	8	ns
tрzн	OEx to Ax/Bx					
tPLZ	Switch Turn-Off Delay	1.5	7.5	1.5	7.5	ns
tрнz	OEx to Ax/Bx					
foex	Operating Frequency - Enable <sup>(2,5)</sup>		10		20	MHz

#### NOTES:

1. See Test Conditions under TEST CIRCUITS AND WAVEFORMS.


2. This parameter is guaranteed but not production tested.

3. The bus switch contributes no propagation delay other than the RC delay of the ON resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 1.35ns at CL = 50pF. Since this time constant is much smaller than the rise and fall times of typical driving signals, it adds very little propagation delay to the system. Propagation delay of the bus switch, when used in a system, is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.


4. Minimums are guaranteed but not production tested.

5. Maximum toggle frequency for  $\overline{\text{OEx}}$  control input (pass voltage > Vcc, Vin = 5V, RLOAD  $\geq$  1M $\Omega$ , no CLOAD).

# SOME APPLICATIONS FOR HOTSWITCH PRODUCTS

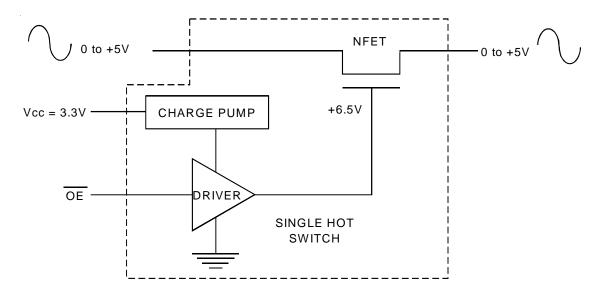

Rail-to-Rail Switching

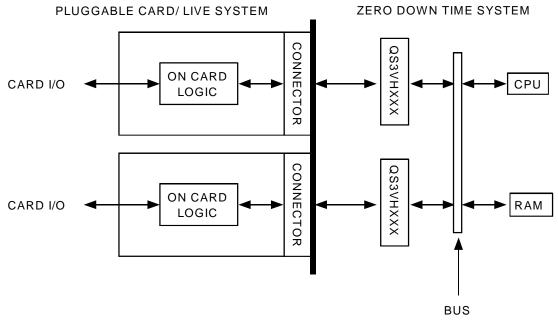


Hot-Swapping

## TEST CIRCUITS AND WAVEFORMS

## TESTCONDITIONS

Symbol	$VCC^{(1)}= 3.3V \pm 0.3V$	$VCC^{(2)} = 2.5V \pm 0.2V$	Unit
Vload	6	2 x Vcc	V
Vih	3	Vcc	V
Vτ	1.5	Vcc/2	V
Vlz	300	150	mV
Vhz	300	150	mV
CL	50	30	pF

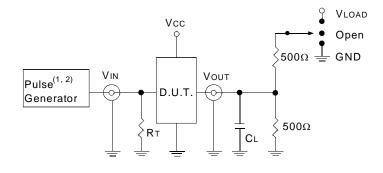

Test Circuits for All Outputs

#### **DEFINITIONS:**

CL = Load capacitance: includes jig and probe capacitance.

RT = Termination resistance: should be equal to Zout of the Pulse Generator.


#### NOTES:

1. Pulse Generator for All Pulses: Rate  $\leq$  10MHz; tF  $\leq$  2.5ns; tR  $\leq$  2.5ns.


2. Pulse Generator for All Pulses: Rate  $\leq$  10MHz; tr  $\leq$  2ns; tr  $\leq$  2ns.

## **SWITCH POSITION**

Test	Switch
tplz/tpzl	Vload
tрнz/tpzн	GND
tPD	Open



### Propagation Delay

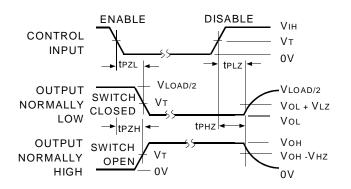


#### NOTE:

1. Diagram shown for input Control Enable-LOW and input Control Disable-HIGH.

Enable and Disable Times

### ORDERING INFORMATION

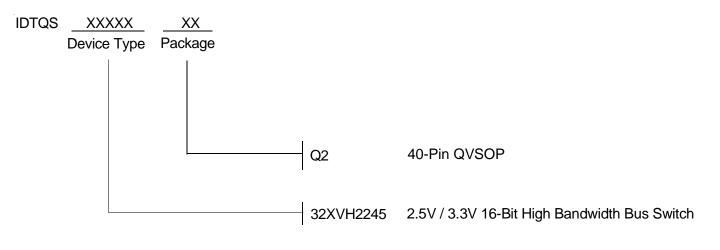

#### DATA SHEET DOCUMENT HISTORY

8/6/2002	Updated according to PCN Logic-0206-11
3/3/2003	Changed Icc limits



*CORPORATE HEADQUARTERS* 2975 Stender Way Santa Clara, CA 95054 *for SALES:* 800-345-7015 or 408-727-6116 fax: 408-492-8674 www.idt.com *for Tech Support:* logichelp@idt.com (408) 654-6459