74LVC3G07 Triple buffer with open-drain output Rev. 8 – 19 October 2011

**Product data sheet** 

### 1. General description

The 74LVC3G07 provides three non-inverting buffers.

The output of the device is an open-drain and can be connected to other open-drain outputs to implement active-LOW wired-OR or active-HIGH wired-AND functions.

Input can be driven from either 3.3 V or 5 V devices. This feature allows the use of this device in a mixed 3.3 V and 5 V environment.

Schmitt trigger action at all inputs makes the circuit tolerant for slower input rise and fall time.

This device is fully specified for partial power-down applications using  $I_{OFF}$ . The  $I_{OFF}$  circuitry disables the output, preventing the damaging backflow current through the device when it is powered down.

### 2. Features and benefits

- Wide supply voltage range from 1.65 V to 5.5 V
- 5 V tolerant input/output for interfacing with 5 V logic
- High noise immunity
- Complies with JEDEC standard:
  - JESD8-7 (1.65 V to 1.95 V)
  - JESD8-5 (2.3 V to 2.7 V)
  - ◆ JESD8-B/JESD36 (2.7 V to 3.6 V).
- ESD protection:
  - HBM JESD22-A114F exceeds 2000 V
  - MM JESD22-A115-A exceeds 200 V
- -24 mA output drive (V<sub>CC</sub> = 3.0 V)
- CMOS low power consumption
- Latch-up performance exceeds 250 mA
- Direct interface with TTL levels
- Inputs accept voltages up to 5 V
- Multiple package options
- Specified from -40 °C to +85 °C and -40 °C to +125 °C.



Triple buffer with open-drain output

## 3. Ordering information

Table 1. Orde	ring information			
Type number	Package			
	Temperature range	Name	Description	Version
74LVC3G07DP	–40 °C to +125 °C	TSSOP8	plastic thin shrink small outline package; 8 leads; body width 3 mm; lead length 0.5 mm	SOT505-2
74LVC3G07DC	–40 °C to +125 °C	VSSOP8	plastic very thin shrink small outline package; 8 leads; body width 2.3 mm	SOT765-1
74LVC3G07GT	–40 °C to +125 °C	XSON8	plastic extremely thin small outline package; no leads; 8 terminals; body 1 $\times$ 1.95 $\times$ 0.5 mm	SOT833-1
74LVC3G07GF	–40 °C to +125 °C	XSON8	extremely thin small outline package; no leads; 8 terminals; body $1.35 \times 1 \times 0.5$ mm	SOT1089
74LVC3G07GD	–40 °C to +125 °C	XSON8U	plastic extremely thin small outline package; no leads; 8 terminals; UTLP based; body $3 \times 2 \times 0.5$ mm	SOT996-2
74LVC3G07GM	–40 °C to +125 °C	XQFN8U	plastic extremely thin quad flat package; no leads; 8 terminals; UTLP based; body $1.6 \times 1.6 \times 0.5$ mm	SOT902-1
74LVC3G07GN	–40 °C to +125 °C	XSON8	extremely thin small outline package; no leads; 8 terminals; body $1.2 \times 1.0 \times 0.35$ mm	SOT1116
74LVC3G07GS	–40 °C to +125 °C	XSON8	extremely thin small outline package; no leads; 8 terminals; body $1.35 \times 1.0 \times 0.35$ mm	SOT1203

### 4. Marking


#### Table 2.Marking codes

Type number	Marking code <sup>[1]</sup>
74LVC3G07DP	V07
74LVC3G07DC	V07
74LVC3G07GT	V07
74LVC3G07GF	V7
74LVC3G07GD	V07
74LVC3G07GM	V07
74LVC3G07GN	V7
74LVC3G07GS	V7

[1] The pin 1 indicator is located on the lower left corner of the device, below the marking code.


Triple buffer with open-drain output

### 5. Functional diagram

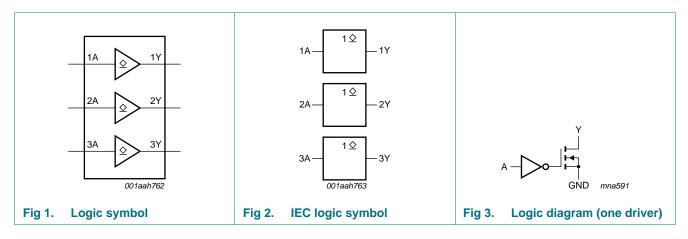


### 6. Pinning information

### 6.1 Pinning

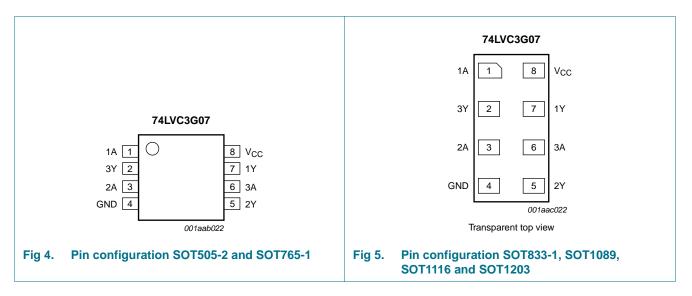

Triple buffer with open-drain output

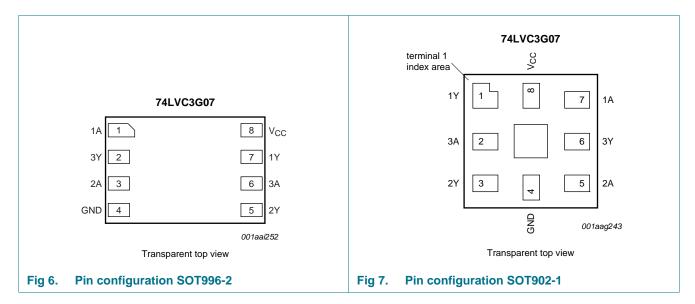

### 6.2 Pin description

Symbol	Pin	Description	
	SOT505-2, SOT765-1, SOT833-1, SOT1089, SOT996-2, SOT1116 and SOT1203	SOT902-1	
1A, 2A, 3A	1, 3, 6	7, 5, 2	data input
GND	4	4	ground (0 V)
1Y, 2Y, 3Y	7, 5, 2	1, 3, 6	data output
V <sub>CC</sub>	8	8	supply voltage

### 7. Functional description

#### Table 4.Function table

Input nA	Output nY
L	L
Н	Z

[1] H = HIGH voltage level; L = LOW voltage level; Z = high-impedance OFF-state.

#### Triple buffer with open-drain output

### 8. Limiting values

#### Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

			0	.0	,
Symbol	Parameter	Conditions	Min	Max	Unit
V <sub>CC</sub>	supply voltage		-0.5	+6.5	V
I <sub>IK</sub>	input clamping current	V <sub>1</sub> < 0 V	-50	-	mA
VI	input voltage		<u>[1]</u> –0.5	+6.5	V
I <sub>OK</sub>	output clamping current	V <sub>O</sub> < 0 V	-50	-	mA
Vo	output voltage	Active mode	<u>[1]</u> –0.5	+6.5	V
		Power-down mode	<u>[1][2]</u> –0.5	+6.5	V
lo	output current	$V_{O} = 0 V$ to 6.5 V	-	50	mA
I <sub>CC</sub>	supply current		-	100	mA
I <sub>GND</sub>	ground current		-100	-	mA
T <sub>stg</sub>	storage temperature		-65	+150	°C
P <sub>tot</sub>	total power dissipation	$T_{amb}$ = -40 °C to +125 °C	[3] _	250	mW

[1] The minimum input and output voltage ratings may be exceeded if the input and output current ratings are observed.

[2] When  $V_{CC}$  = 0 V (Power-down mode), the output voltage can be 5.5 V in normal operation.

[3] For TSSOP8 package: above 55 °C the value of P<sub>tot</sub> derates linearly with 2.5 mW/K.
 For VSSOP8 package: above 110 °C the value of P<sub>tot</sub> derates linearly with 8 mW/K.
 For XSON8, XSON8U and XQFN8U packages: above 118 °C the value of P<sub>tot</sub> derates linearly with 7.8 mW/K.

### 9. Recommended operating conditions

Table 6.	Operating conditions				
Symbol	Parameter	Conditions	Min	Max	Unit
V <sub>CC</sub>	supply voltage		1.65	5.5	V
VI	input voltage		0	5.5	V
Vo	output voltage	Active mode	0	5.5	V
		Power-down mode; $V_{CC} = 0 V$	0	5.5	V
T <sub>amb</sub>	ambient temperature		-40	+125	°C
$\Delta t/\Delta V$	input transition rise and fall rate	$V_{CC}$ = 1.65 V to 2.7 V	-	20	ns/V
		$V_{CC} = 2.7 \text{ V to } 5.5 \text{ V}$	-	10	ns/V

### **10. Static characteristics**

#### Table 7. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
T <sub>amb</sub> = -40	°C to +85 °C[ <u>1]</u>					
V <sub>IH</sub>	HIGH-level input	$V_{CC} = 1.65 \text{ V} \text{ to } 1.95 \text{ V}$	$0.65 \times V_{CC}$	-	-	V
	voltage	$V_{CC}$ = 2.3 V to 2.7 V	1.7	-	-	V
		$V_{CC}$ = 2.7 V to 3.6 V	2.0	-	-	V
		$V_{CC}$ = 4.5 V to 5.5 V	$0.7\times V_{CC}$	-	-	V
V <sub>IL</sub>	LOW-level input	$V_{CC}$ = 1.65 V to 1.95 V	-	-	$0.35 \times V_{CC}$	V
	voltage	$V_{CC}$ = 2.3 V to 2.7 V	-	-	0.7	V
		$V_{CC}$ = 2.7 V to 3.6 V	-	-	0.8	V
		$V_{CC}$ = 4.5 V to 5.5 V	-	-	$0.3\times V_{CC}$	V
V <sub>OL</sub>	LOW-level output	$V_{I} = V_{IH} \text{ or } V_{IL}$				
	voltage	I <sub>O</sub> = 100 μA; V <sub>CC</sub> = 1.65 V to 5.5 V	-	-	0.1	V
		$I_0 = 4 \text{ mA}; V_{CC} = 1.65 \text{ V}$	-	-	0.45	V
		$I_0 = 8 \text{ mA}; V_{CC} = 2.3 \text{ V}$	-	-	0.3	V
		$I_0 = 12 \text{ mA}; V_{CC} = 2.7 \text{ V}$	-	-	0.4	V
		$I_0 = 24 \text{ mA}; V_{CC} = 3.0 \text{ V}$	-	-	0.55	V
		$I_0 = 32 \text{ mA}; V_{CC} = 4.5 \text{ V}$	-	-	0.55	V
I	input leakage current	V <sub>1</sub> = 5.5 V or GND; V <sub>CC</sub> = 0 V to 5.5 V	[2] _	±0.1	±5	μΑ
I <sub>OZ</sub>	OFF-state output current	$\label{eq:VI} \begin{array}{l} V_{I} = V_{IH} \text{ or } V_{IL};  V_{O} = V_{CC} \text{ or } GND; \\ V_{CC} = 5.5 \ V \end{array}$	-	±0.1	±10	μΑ
OFF	power-off leakage current	$V_{I} \text{ or } V_{O} = 5.5 \text{ V}; V_{CC} = 0 \text{ V}$	-	±0.1	±10	μΑ
сс	supply current	$V_{I} = 5.5 V \text{ or GND}; I_{O} = 0 A;$ $V_{CC} = 1.65 V \text{ to } 5.5 V$	-	0.1	10	μΑ
Alcc	additional supply current	per pin; $V_{CC} = 2.3 \text{ V}$ to 5.5 V; $V_I = V_{CC} - 0.6 \text{ V}$ ; $I_O = 0 \text{ A}$	[2] -	5	500	μΑ
Ci	input capacitance		-	2.5	-	pF

### Triple buffer with open-drain output

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
T <sub>amb</sub> = -40	°C to +125 °C					
V <sub>IH</sub>	HIGH-level input	$V_{CC} = 1.65 \text{ V} \text{ to } 1.95 \text{ V}$	$0.65\times V_{CC}$	-	-	V
	voltage	$V_{CC}$ = 2.3 V to 2.7 V	1.7	-	-	V
		$V_{CC}$ = 2.7 V to 3.6 V	2.0	-	-	V
		$V_{CC}$ = 4.5 V to 5.5 V	$0.7\times V_{CC}$	-	-	V
V <sub>IL</sub>	LOW-level input	$V_{CC} = 1.65 \text{ V} \text{ to } 1.95 \text{ V}$	-	-	$0.35\times V_{CC}$	V
	voltage	$V_{CC}$ = 2.3 V to 2.7 V	-	-	0.7	V
		$V_{CC} = 2.7 \text{ V to } 3.6 \text{ V}$	-	-	0.8	V
		$V_{CC}$ = 4.5 V to 5.5 V	-	-	$0.3\times V_{CC}$	V
V <sub>OL</sub>	LOW-level output	$V_{I} = V_{IH} \text{ or } V_{IL}$				
	voltage	I <sub>O</sub> = 100 μA; V <sub>CC</sub> = 1.65 V to 5.5 V	-	-	0.1	V
		$I_0 = 4 \text{ mA}; V_{CC} = 1.65 \text{ V}$	-	-	0.70	V
		$I_{O} = 8 \text{ mA}; V_{CC} = 2.3 \text{ V}$	-	-	0.45	V
		$I_0 = 12 \text{ mA}; V_{CC} = 2.7 \text{ V}$	-	-	0.60	V
		$I_{O} = 24 \text{ mA}; V_{CC} = 3.0 \text{ V}$	-	-	0.80	V
		$I_{O} = 32 \text{ mA}; V_{CC} = 4.5 \text{ V}$	-	-	0.80	V
I	input leakage current	$V_{I} = 5.5 \text{ V or GND};$ $V_{CC} = 0 \text{ V to } 5.5 \text{ V}$	-	-	±20	μA
l <sub>oz</sub>	OFF-state output current		-	-	±10	μΑ
I <sub>OFF</sub>	power-off leakage current	$V_{I} \text{ or } V_{O} = 5.5 \text{ V};  V_{CC} = 0 \text{ V}$	-	-	±20	μA
lcc	supply current	$V_{I} = 5.5 \text{ V or GND}; I_{O} = 0 \text{ A};$ $V_{CC} = 1.65 \text{ V to } 5.5 \text{ V}$	-	-	40	μA
Δl <sub>CC</sub>	additional supply current	per pin; $V_{CC} = 2.3 \text{ V}$ to 5.5 V; $V_1 = V_{CC} - 0.6 \text{ V}$ ; $I_0 = 0 \text{ A}$	-	-	5000	μΑ

#### Table 7. Static characteristics ...continued

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

[1] All typical values are measured at  $T_{amb}$  = 25 °C.

[2] These typical values are measured at  $V_{CC}$  = 3.3 V.

### **11. Dynamic characteristics**

#### Table 8. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V). For test circuit see <u>Figure 9</u>.

Symbol	Parameter	Conditions		-40	) °C to +85	S °C	–40 °C to	o +125 °C	Unit
				Min	Typ <mark>[1]</mark>	Мах	Min	Max	
t <sub>pd</sub>	propagation delay	nA to nY; see Figure 8	[2]						
		$V_{CC}$ = 1.65 V to 1.95 V		1.0	2.9	6.7	1.0	8.4	ns
		$V_{CC}$ = 2.3 V to 2.7 V		0.5	1.7	4.3	0.5	5.5	ns
		$V_{CC} = 2.7 V$		1.0	2.3	4.2	1.0	5.3	ns
		$V_{CC} = 3.0 \text{ V} \text{ to } 3.6 \text{ V}$		0.5	2.1	3.7	0.5	4.7	ns
		$V_{CC} = 4.5 V \text{ to } 5.5 V$		0.5	1.5	2.9	0.5	3.7	ns
C <sub>PD</sub>	power dissipation capacitance	$V_{\rm I}$ = GND to $V_{CC};V_{CC}$ = 3.3 V	[3]	-	6.5	-	-	-	pF

[1] Typical values are measured at  $T_{amb}$  = 25 °C and  $V_{CC}$  = 1.8 V, 2.5 V, 2.7 V, 3.3 V and 5.0 V respectively.

 $\label{eq:tpd} [2] \quad t_{pd} \text{ is the same as } t_{PLZ} \text{ and } t_{PZL}.$ 

[3]  $C_{PD}$  is used to determine the dynamic power dissipation (P<sub>D</sub> in  $\mu$ W).

 $P_{D} = C_{PD} \times V_{CC}^{2} \times f_{i} \times N + \Sigma(C_{L} \times V_{CC}^{2} \times f_{o}) \text{ where:}$ 

 $f_i$  = input frequency in MHz;

 $f_o = output frequency in MHz;$ 


 $C_L$  = output load capacitance in pF;

 $V_{CC}$  = supply voltage in V;

N = number of inputs switching;

 $\Sigma(C_L \times V_{CC}{}^2 \times f_o) = \text{sum of outputs.}$ 

### 12. Waveforms

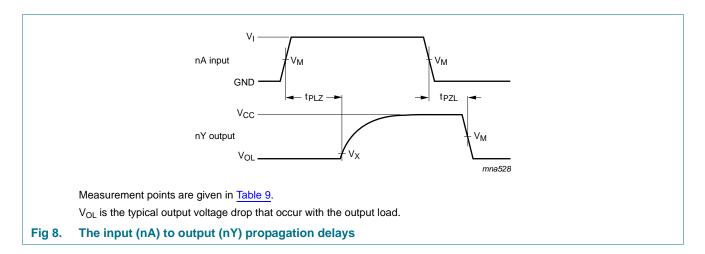


### **NXP Semiconductors**

## 74LVC3G07

#### Triple buffer with open-drain output

Table 9.Measurement	points		
Supply voltage	Input	Output	
V <sub>CC</sub>	V <sub>M</sub>	V <sub>M</sub>	V <sub>X</sub>
1.65 V to 1.95 V	$0.5\times V_{CC}$	$0.5  imes V_{CC}$	V <sub>OL</sub> + 0.15 V
2.3 V to 2.7 V	$0.5\times V_{CC}$	$0.5 \times V_{CC}$	V <sub>OL</sub> + 0.15 V
2.7 V	1.5 V	1.5 V	V <sub>OL</sub> + 0.3 V
3.0 V to 3.6 V	1.5 V	1.5 V	V <sub>OL</sub> + 0.3 V
4.5 V to 5.5 V	$0.5 \times V_{CC}$	$0.5\times V_{CC}$	V <sub>OL</sub> + 0.3 V



Test data is given in <u>Table 10</u>.

Definitions for test circuit:

 $R_L$  = Load resistance.

 $C_L$  = Load capacitance including jig and probe capacitance.

 $R_T$  = Termination resistance should be equal to the output impedance  $Z_o$  of the pulse generator.

V<sub>EXT</sub> = External voltage for measuring switching times.


Fig 9. Test circuit for measuring switching times

#### Table 10. Test data

Supply voltage	Input		Load		V <sub>EXT</sub>
V <sub>cc</sub>	VI	t <sub>r</sub> = t <sub>f</sub>	CL	RL	t <sub>PZL</sub> , t <sub>PLZ</sub>
1.65 V to 1.95 V	V <sub>CC</sub>	$\leq$ 2.0 ns	30 pF	1 kΩ	$2 \times V_{CC}$
2.3 V to 2.7 V	V <sub>CC</sub>	$\leq$ 2.0 ns	30 pF	500 Ω	$2 \times V_{CC}$
2.7 V	2.7 V	$\leq$ 2.5 ns	50 pF	500 Ω	6 V
3.0 V to 3.6 V	2.7 V	$\leq$ 2.5 ns	50 pF	500 Ω	6 V
4.5 V to 5.5 V	V <sub>CC</sub>	$\leq$ 2.5 ns	50 pF	500 Ω	$2 \times V_{CC}$

Triple buffer with open-drain output


### 13. Package outline

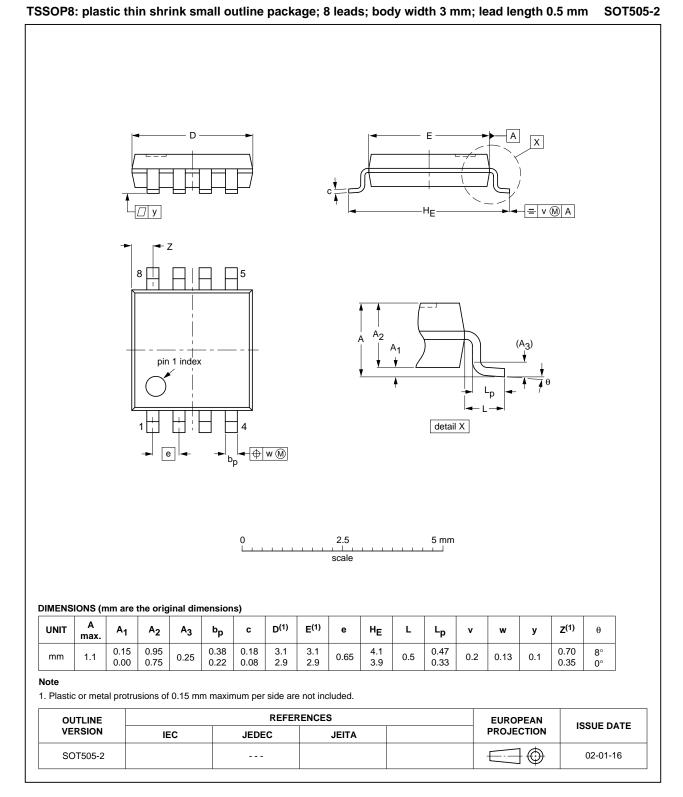

#### Fig 10. Package outline SOT505-2 (TSSOP8)

All information provided in this document is subject to legal disclaimers.

Triple buffer with open-drain output

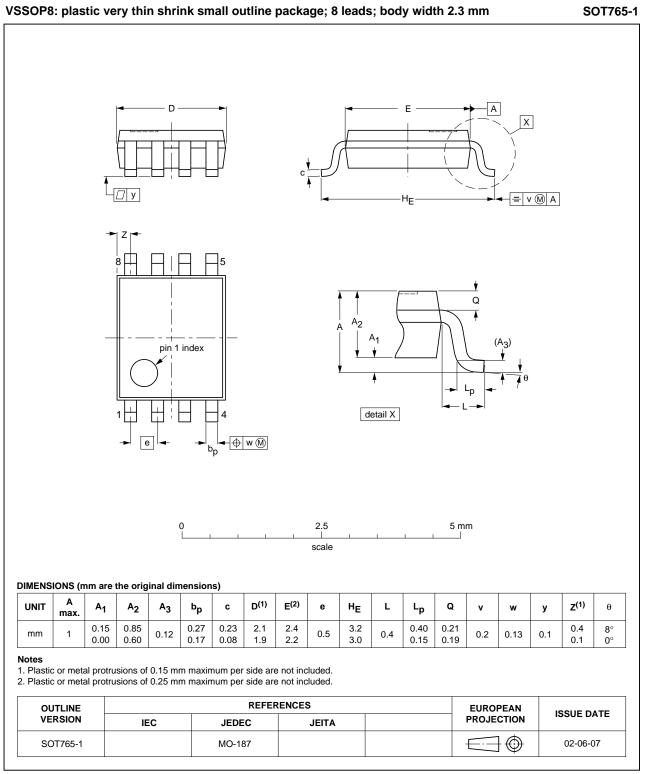

#### Fig 11. Package outline SOT765-1 (VSSOP8)

All information provided in this document is subject to legal disclaimers.

Triple buffer with open-drain output


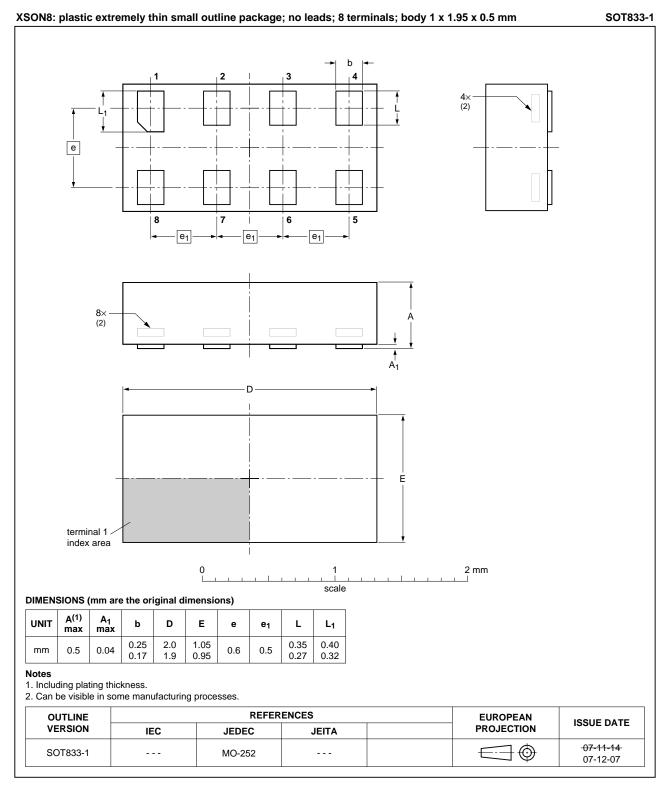


Fig 12. Package outline SOT833-1 (XSON8)

Triple buffer with open-drain output

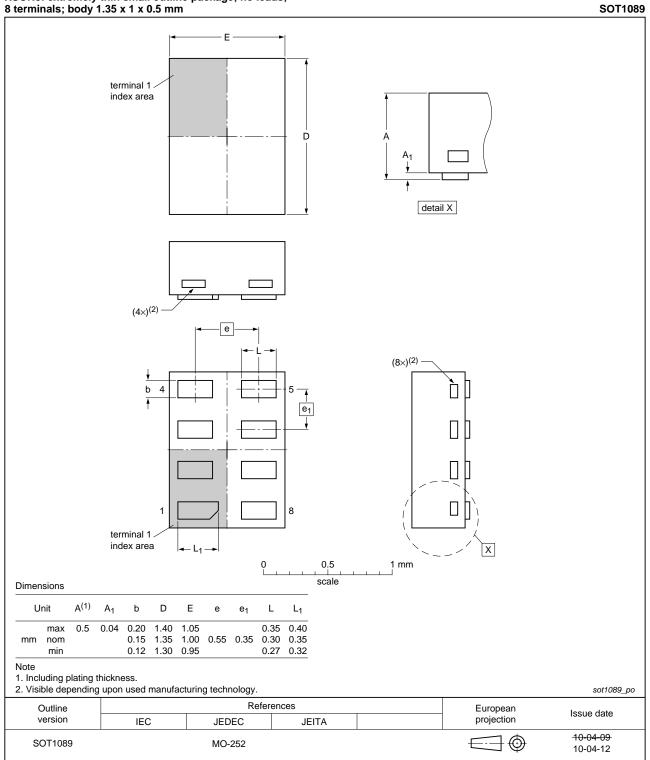


## XSON8: extremely thin small outline package; no leads; 8 terminals; body 1.35 x 1 x 0.5 mm

Fig 13. Package outline SOT1089 (XSON8)

All information provided in this document is subject to legal disclaimers.

Triple buffer with open-drain output

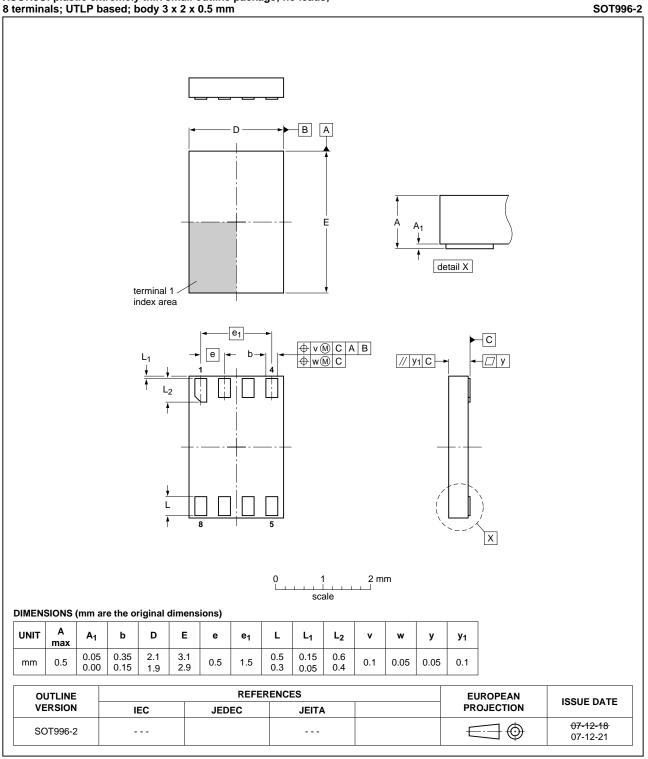


XSON8U: plastic extremely thin small outline package; no leads; 8 terminals; UTLP based; body 3 x 2 x 0.5 mm

#### Fig 14. Package outline SOT996-2 (XSON8U)

All information provided in this document is subject to legal disclaimers.

Triple buffer with open-drain output

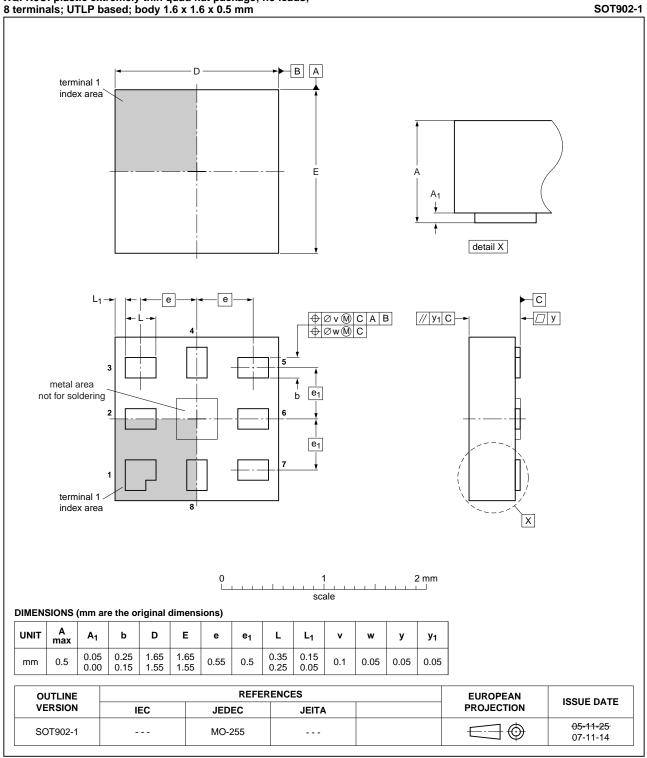


## XQFN8U: plastic extremely thin quad flat package; no leads; 8 terminals; UTLP based; body 1.6 x 1.6 x 0.5 mm

Fig 15. Package outline SOT902-1 (XQFN8U)

All information provided in this document is subject to legal disclaimers.

Triple buffer with open-drain output

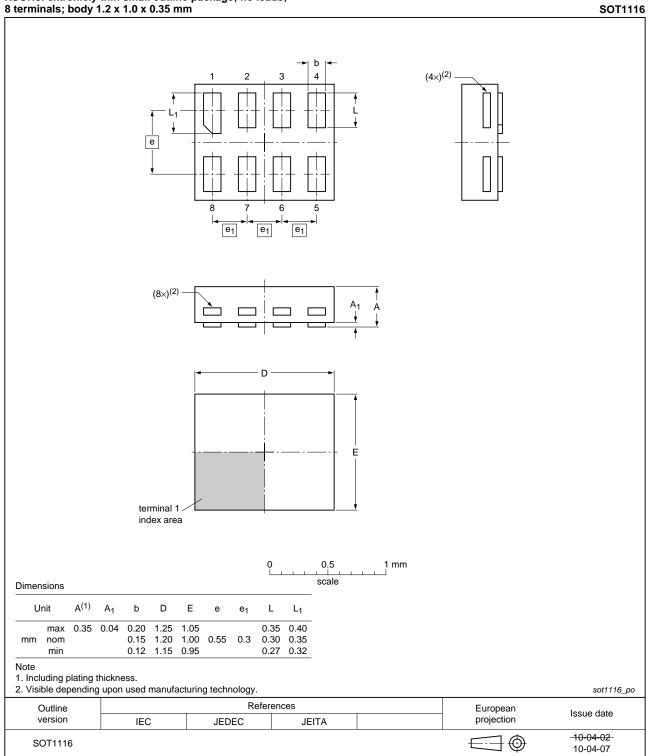


## XSON8: extremely thin small outline package; no leads; 8 terminals; body 1.2 x 1.0 x 0.35 mm

Fig 16. Package outline SOT1116 (XSON8)

All information provided in this document is subject to legal disclaimers.

Triple buffer with open-drain output

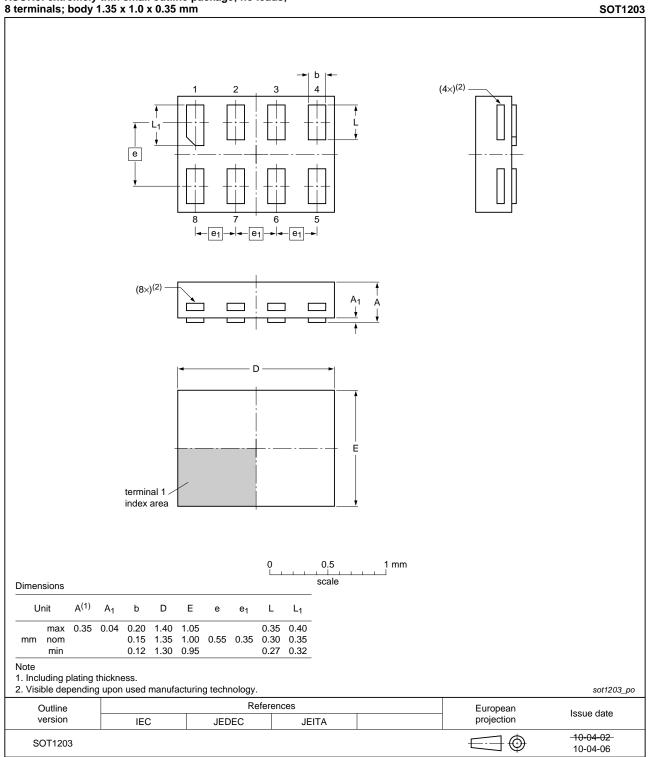

XSON8: extremely thin small outline package; no leads; 8 terminals; body 1.35 x 1.0 x 0.35 mm

Fig 17. Package outline SOT1203 (XSON8)

All information provided in this document is subject to legal disclaimers.

Triple buffer with open-drain output

### 14. Abbreviations

Description
Complementary Metal-Oxide Semiconductor
Device Under Test
ElectroStatic Discharge
Human Body Model
Machine Model
Transistor-Transistor Logic

## 15. Revision history

Table 12. Revision history					
Document ID	Release date	Data sheet status	Change notice	Supersedes	
74LVC3G07 v.8	20111019	Product data sheet	-	74LVC3G07 v.7	
Modifications:	<ul> <li>Marking coo 74LVC3G07</li> </ul>	le corrected (V07 changed /GS.	to V7) for: 74LVC3G070	GF, 74LVC3G07GN,	
74LVC3G07 v.7	20100809	Product data sheet	-	74LVC3G07 v.6	
74LVC3G07 v.6	20080616	Product data sheet	-	74LVC3G07 v.5	
74LVC3G07 v.5	20080219	Product data sheet	-	74LVC3G07 v.4	
74LVC3G07 v.4	20070521	Product data sheet	-	74LVC3G07 v.3	
74LVC3G07 v.3	20050201	Product data sheet	-	74LVC3G07 v.2	
74LVC3G07 v.2	20041027	Product data sheet	-	74LVC3G07 v.1	
74LVC3G07 v.1	20040608	Product data sheet	-	-	

#### Triple buffer with open-drain output

### 16. Legal information

#### 16.1 Data sheet status

Document status[1][2]	Product status <sup>[3]</sup>	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <a href="http://www.nxp.com">http://www.nxp.com</a>.

### 16.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### 16.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use in automotive applications — This NXP Semiconductors product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nxp.com/profile/terms">http://www.nxp.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Product data sheet

74LVC3G07

© NXP B.V. 2011. All rights reserved

#### Triple buffer with open-drain output

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

### 16.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

### **17. Contact information**

For more information, please visit: http://www.nxp.com

For sales office addresses, please send an email to: salesaddresses@nxp.com

#### Triple buffer with open-drain output

### **18. Contents**

1	General description 1
2	Features and benefits 1
3	Ordering information 2
4	Marking 2
5	Functional diagram 3
6	Pinning information 3
6.1	Pinning 3
6.2	Pin description 4
7	Functional description 4
8	Limiting values 5
9	Recommended operating conditions 5
10	Static characteristics 6
11	Dynamic characteristics 8
12	Waveforms 8
13	Package outline 10
14	Abbreviations 18
15	Revision history 18
16	Legal information
16.1	Data sheet status 19
16.2	Definitions 19
16.3	Disclaimers
16.4	Trademarks 20
17	Contact information 20
18	Contents 21

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP B.V. 2011.

All rights reserved.

For more information, please visit: http://www.nxp.com For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 19 October 2011 Document identifier: 74LVC3G07