

# **BAV19WS - BAV21WS**


### SURFACE MOUNT FAST SWITCHING DIODE

#### **Features**

- Fast Switching Speed
- Surface Mount Package Ideally Suited for Automatic Insertion
- For General Purpose Switching Applications
- High Conductance
- Also Available in Lead Free Version

#### **Mechanical Data**

- Case: SOD-323, Molded Plastic
- Case material UL Flammability Rating Classification 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020A
- Terminals: Solderable per MIL-STD-202, Method 208
- Also Available in Lead Free Plating (Matte Tin Finish). Please see Ordering Information, Note 4, on Page 2
- Terminal Connections: Cathode Band, See Page 2
- BAV19WS Marking: A8 or T2 or T3
- BAV20WS Marking: T2 or T3
- BAV21WS Marking: T3
- Weight: 0.004 grams (approx.)



SOD-323				
Dim	Min	Max		
Α	2.30	2.70		
В	1.60 1.80			
С	1.20 1.40			
D	1.05 Typical			
E	0.25	0.35		
G	0.20	0.40		
Н	0.10 0.15			
J	0.05 Typical			
α	0°	8°		
All Dimensions in mm				

## Maximum Ratings @ T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbol	BAV19WS	BAV20WS	BAV21WS	Unit
Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	120	200	250	V
Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RWM</sub> V <sub>R</sub>	100	150	200	V
RMS Reverse Voltage	V <sub>R(RMS)</sub>	71	106	141	V
Forward Continuous Current (Note 1)	I <sub>FM</sub>		400		mA
Average Rectified Output Current (Note 1)	Io	200			mA
Non-Repetitive Peak Forward Surge Current @ t = 1.0μs @ t = 1.0s	I <sub>FSM</sub>		2.5 0.5		А
Repetitive Peak Forward Surge Current	I <sub>FRM</sub>		625		mA
Power Dissipation	Pd		200		mW
Thermal Resistance Junction to Ambient Air (Note 1)	R <sub>θ</sub> JA		625		°C/W
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>STG</sub>		-65 to +150		°C

#### Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified

Characteristic		Symbol	Min	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 2)	BAV19WS BAV20WS BAV21WS	V <sub>(BR)R</sub>	120 200 250	_	V	I <sub>R</sub> = 100μA
Forward Voltage (Note 2)		V <sub>FM</sub>	_	1.0 1.25	V	I <sub>F</sub> = 100mA I <sub>F</sub> = 200mA
Peak Reverse Current @ Rated DC Blocking Voltage (Note 2)		I <sub>RM</sub>	_	100 15	NA μA	$\begin{array}{ll} T_j = & 25^{\circ}C \\ T_j = & 100^{\circ}C \end{array}$
Total Capacitance		Ct	_	5.0	pF	V <sub>R</sub> = 0, f = 1.0MHz
Reverse Recovery Time		t <sub>rr</sub>	_	50	ns	$I_F = I_R = 30 \text{mA},$ $I_{rr} = 0.1 \text{ x } I_R, R_L = 100 \Omega$

Note: 1. Part mounted on FR-4 PC board with recommended pad layout, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.

2. Short duration pulse test used to minimize self-heating effect.




## Ordering Information (Note 3)

Device	Packaging	Shipping
BAV19WS-7	SOD-323	3000/Tape & Reel
BAV20WS-7	SOD-323	3000/Tape & Reel
BAV21WS-7	SOD-323	3000/Tape & Reel


Notes:


- 3. For Packaging Details, go to our website at: http://www.diodes.com/datasheets/ap02007.pdf.
- 4. For Lead Free version (with Lead Free terminal finish) part number, please add "-F" suffix to the part number above. Example: BAV21WS-7-F.


## **Marking Information**




XX = Product Type Marking Code (See Page 1)

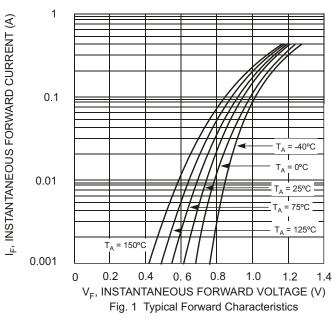

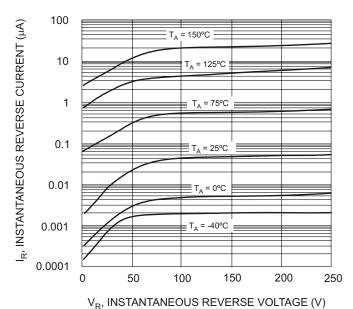

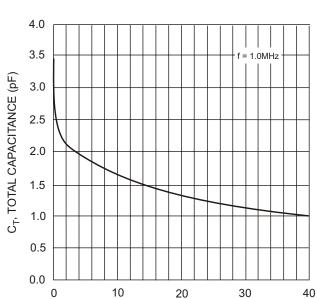

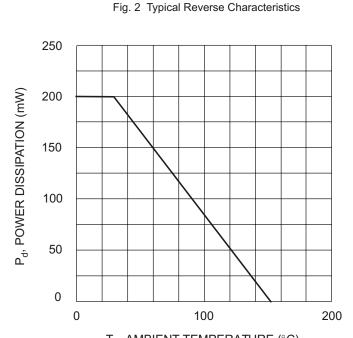

V<sub>R</sub>, REVERSE VOLTAGE (V)
Fig. 3 Typical Capacitance vs. Reverse Voltage

 $T_A$ , AMBIENT TEMPERATURE (°C) Fig. 4 Power Derating Curve, Total Package