

# TAI-SAW TECHNOLOGY CO., LTD. No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532 E-mail: <a href="mailto:tstsales@mail.taisaw.com">tstsales@mail.taisaw.com</a> Web: <a href="mailto:www.taisaw.com">www.taisaw.com</a>

# **Product Specifications Approval Sheet**

Product Description:	SAW Filter 1161 M	Hz SMD 3.0×3.0	) mm (BW=20 MHz)
TST Part No.: TA183	30A		
Customer Part No.:_			
Customer signature	required		
Company:			-
Division:			_
Approved by :			-
Date:			-
		0	
Checked by:	David Chang	Dark	
Approved by:	Bob Chau	phylm	
Date:	2014/12/29		

- 1. Customer signed back is required before TST can proceed with sample build and receive orders.
- 2. Orders received without customer signed back will be regarded as agreement on the specifications.
- 3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



# TAI-SAW TECHNOLOGY CO., LTD. No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District Taoyuan, 324, Taiwan, R.O.C. TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

## **SAW Filter 1161 MHz**

MODEL NO.: TA1830A REV. NO.:1

#### A. MAXIMUM RATING:

1. Input Power Level: 10 dBm

2. DC Voltage: 3 V

3. Operating Temperature: -40°C to +85°C

4. Storage Temperature: -40°C to +85°C

RoHS Compliant Lead free Lead-free soldering


Electrostatic Sensitive Device (ESD)

# B. <u>ELECTRICAL CHARACTERISTICS</u>:


Item		Unit	Min.	Тур.	Max.			
Center frequency	Fc	MHz	-	1161	-			
Insertion Loss (1151~1171 MHz)	IL	dB	ı	1.9	3.0			
Amplitude Ripple (1151~1171 MHz)		dB	-	0.6	2.0			
<b>VSWR</b> (1151~1171 MHz)		-	-	1.5	2.4			
Attenuation (Reference level from 0 dB)								
50 ~ 1110 MHz		dB	28	36	-			
1200 ~ 1500 MHz		dB	28	40				
Temperature coefficient of frequency	ppm/k	-	-36	-				


#### C. MEASUREMENT CIRCUIT:


HP Network analyzer

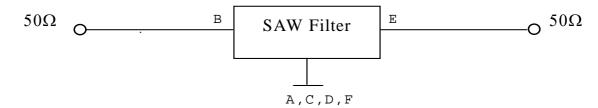

### **D. OUTLINE DRAWING:**





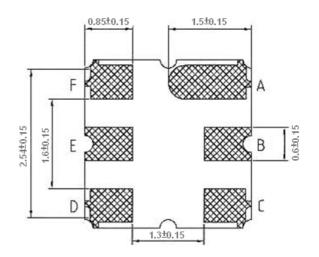

B: Input E: Output

A, C, D, F: Ground

Unit: mm


 $\triangle$ : Year Code (2011->1, 2012->2, ..., 2019->9, 2020->0)

☐: Date Code


#### **Date Code Table:**


WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
А	В	С	D	E	F	G	Н	J	J	K	L	М
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	0	Р	Q	R	S	Т	U	V	W	Х	Υ	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
а	b	С	d	е	f	g	h	j	j	k	I.	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	0	р	q	r	S	t	u	٧	W	Х	У	Z

# **E. PCB Footprint:**

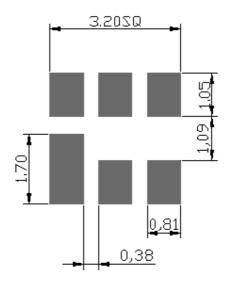


# F. Frequency Characteristics:

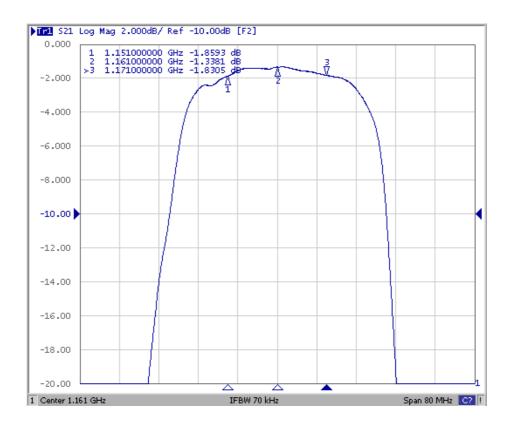

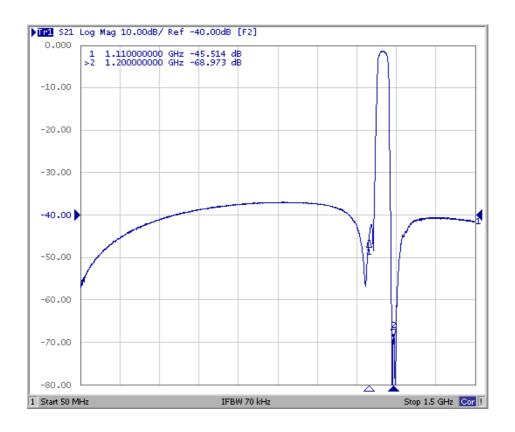


#### **Reflection Functions:**



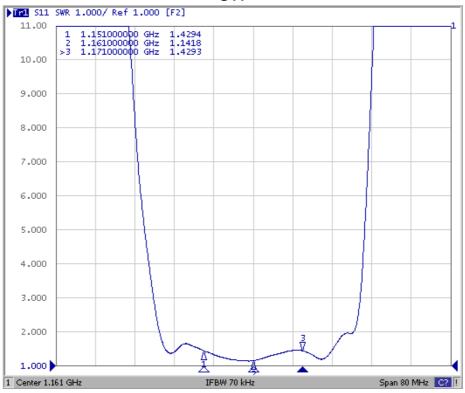


#### **S22**

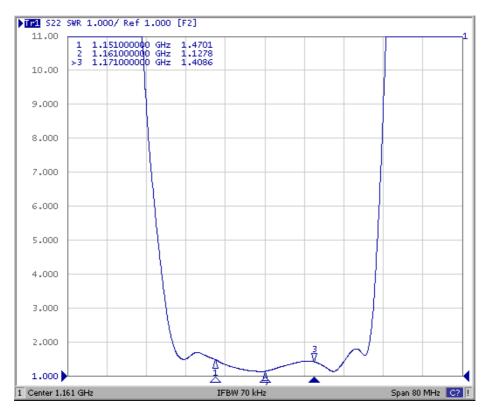


# G. PACKING:

### 1. REEL DIMENSION

# (Please refer to FR-75D10 for packing quantity)

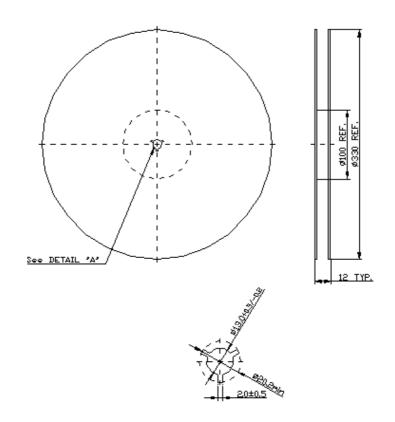

## 2. TAPE DIMENSION

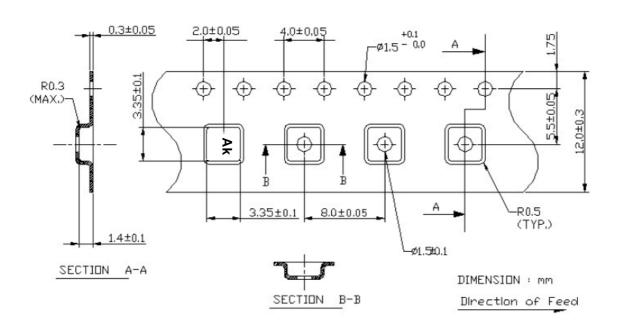

# H. RECOMMENDED REFLOW PROFILE:

