



PRODUCT SPECIFICATION

AUDIO CABLE - GAC-7 'TUBE'

Sheet No. **PS 0739**

Date : 06.09.94


Issue No. 1

Sheet 1 of 1

Signature

Deltron Part No. **441-0900**

Dimensions

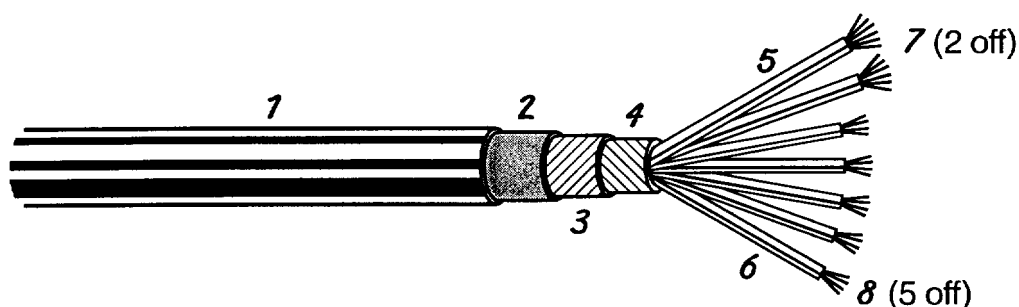

- | | |
|-------------------|---|
| 1 - JACKET | Grey PVC, Ø 6,2mm (RAL 7024) |
| 2 - FLEECE LINING | Polyester |
| 3 - SHIELD 1 | (Reussen shield) stranded lapped copper wire, 0,1mm |
| 4 - SHIELD 2 | (Reussen shield) stranded lapped copper wire, 0,1mm |
| 5 - INSULATION | Polyethylene, Ø 1,5mm |
| 6 - INSULATION | Polyethylene, Ø 1,1mm |
| 7 - CONDUCTOR 'A' | 252 x 0,05mm (0,50mm ²) copper wires |
| 8 - CONDUCTOR 'B' | 72 x 0,05mm (0,14mm ²) copper wires |

Features

OPERATIONAL AREAS

- tube microphones

ORDERING DATA

Colours grey (RAL 7024)
 Reels at 200m H327
 Weight/reel 12,50kg
 Weight/metre 0,058kg

Conductors 'A' red & blue
 Conductors 'B' black, green, grey,
 white & yellow

TECHNICAL SPECIFICATION

Conductor 'A' resistance < 40 Ohm/km
 Conductor 'B' resistance < 145 Ohm/km
 Shielding resistance < 15 Ohm/km
 Capacitance cond to cond: 90 pF/m
 cond to shield: 160 pF/m
 Insulation resistance > 15 GigaOhm/km
 Test Voltage cond to cond: 500 Veff
 cond to shield: 2000 Veff