

## Optocoupler with Phototransistor Output

### Description

The TCLT10.. Series consists of a phototransistor optically coupled to a gallium arsenide infrared-emitting diode in a 4-lead SO6L package.

The elements are mounted on one leadframe using a **coplanar technique**, providing a fixed distance between input and output for highest safety requirements.

### Applications

Circuits for safe protective separation against electrical shock according to safety class II (reinforced isolation):


- For appl. class I – IV at mains voltage  $\leq 300\text{ V}$
- For appl. class I – III at mains voltage  $\leq 600\text{ V}$  according to VDE 0884, table 2, suitable for:

**Switch-mode power supplies, line receiver, computer peripheral interface, microprocessor system interface.**


### VDE Standards

These couplers perform safety functions according to the following equipment standards:

- **VDE 0884**  
Optocoupler for electrical safety requirements (will be replaced by IEC 747-5-1.2.3)
- **IEC 950/EN 60950**  
Office machines (applied for reinforced isolation for mains voltage  $\leq 400\text{ V}_{\text{RMS}}$ )
- **VDE 0804**  
Telecommunication apparatus and data processing
- **IEC 65**  
Safety for mains-operated electronic and related household apparatus



15231



**0884**

### Order Instruction

| Ordering Code | CTR Ranking | Remarks                |
|---------------|-------------|------------------------|
| TCLT1000      | 50 to 600%  | 4 Pin = Single channel |
| TCLT1001      | 40 to 80%   | 4 Pin = Single channel |
| TCLT1002      | 63 to 125%  | 4 Pin = Single channel |
| TCLT1003      | 100 to 200% | 4 Pin = Single channel |
| TCLT1005      | 50 to 150%  | 4 Pin = Single channel |
| TCLT1006      | 100 to 300% | 4 Pin = Single channel |
| TCLT1007      | 80 to 160%  | 4 Pin = Single channel |
| TCLT1008      | 130 to 260% | 4 Pin = Single channel |
| TCLT1009      | 200 to 400% | 4 Pin = Single channel |

### Features

#### Approvals:

- **BSI:** BS EN 41003, BS EN 60095 (BS 415), BS EN 60950 (BS 7002), Certificate number 7081 and 7402
- **Underwriters Laboratory (UL)** 1577 recognized, file number E-76222 – Double Protection
- **CSA (C-UL)** 1577 recognized file number E- 76222 - Double Protection
- **VDE 0884**, Certificate number 132473

#### VDE 0884 related features:

- Rated impulse voltage (transient overvoltage)  $V_{IOTM} = 8$  kV peak
- Isolation test voltage (partial discharge test voltage)  $V_{pd} = 1.6$  kV
- Rated isolation voltage (RMS includes DC)  $V_{IOWM} = 600 V_{RMS}$  (848 V peak)
- Rated recurring peak voltage (repetitive)  $V_{IORM} = 600 V_{RMS}$

- Creepage current resistance according to VDE 0303/IEC 112  
**Comparative Tracking Index: CTI  $\geq 175$**
- Thickness through insulation  $\geq 0.75$  mm
- Creepage distance  $> 8$  mm
- Tested acc. 60950: Am4: 1997 clause 2.9.6.

#### General features:

- Low profile package
- CTR offered in 9 groups
- Isolation materials according to UL94-VO
- Pollution degree 2 (DIN/VDE 0110 / resp. IEC 664)
- Climatic classification 55/100/21 (IEC 68 part 1)
- Special construction:  
Therefore, extra low coupling capacity of typical 0.2 pF, high **Common Mode Rejection**
- Low temperature coefficient of CTR
- Coupling System W

**Absolute Maximum Ratings****Input (Emitter)**

| Parameter             | Test Conditions           | Symbol    | Value | Unit       |
|-----------------------|---------------------------|-----------|-------|------------|
| Reverse voltage       |                           | $V_R$     | 6     | V          |
| Forward current       |                           | $I_F$     | 60    | mA         |
| Forward surge current | $t_p \leq 10 \mu s$       | $I_{FSM}$ | 1.5   | A          |
| Power dissipation     | $T_{amb} \leq 25^\circ C$ | $P_V$     | 100   | mW         |
| Junction temperature  |                           | $T_j$     | 125   | $^\circ C$ |

**Output (Detector)**

| Parameter                 | Test Conditions               | Symbol    | Value | Unit       |
|---------------------------|-------------------------------|-----------|-------|------------|
| Collector emitter voltage |                               | $V_{CEO}$ | 70    | V          |
| Emitter collector voltage |                               | $V_{ECO}$ | 7     | V          |
| Collector current         |                               | $I_C$     | 50    | mA         |
| Collector peak current    | $t_p/T = 0.5, t_p \leq 10 ms$ | $I_{CM}$  | 100   | mA         |
| Power dissipation         | $T_{amb} \leq 25^\circ C$     | $P_V$     | 150   | mW         |
| Junction temperature      |                               | $T_j$     | 125   | $^\circ C$ |

**Coupler**

| Parameter                           | Test Conditions           | Symbol    | Value       | Unit       |
|-------------------------------------|---------------------------|-----------|-------------|------------|
| Isolation test voltage (RMS)        |                           | $V_{IO}$  | 5           | kV         |
| Total power dissipation             | $T_{amb} \leq 25^\circ C$ | $P_{tot}$ | 250         | mW         |
| Operating ambient temperature range |                           | $T_{amb}$ | -40 to +100 | $^\circ C$ |
| Storage temperature range           |                           | $T_{stg}$ | -40 to +100 | $^\circ C$ |
| Soldering temperature               |                           | $T_{sd}$  | 235         | $^\circ C$ |

### Electrical Characteristics ( $T_{amb} = 25^{\circ}\text{C}$ )

#### Input (Emitter)

| Parameter            | Test Conditions                        | Symbol | Min. | Typ. | Max. | Unit |
|----------------------|--|--------|------|------|------|------|
| Forward voltage      | $I_F = \pm 50 \text{ mA}$              | $V_F$  |      | 1.25 | 1.6  | V    |
| Junction capacitance | $V_R = 0 \text{ V}, f = 1 \text{ MHz}$ | $C_j$  |      | 50   |      | pF   |

#### Output (Detector)

| Parameter                         | Test Conditions                         | Symbol    | Min. | Typ. | Max. | Unit |
|-----------------------------------|---|-----------|------|------|------|------|
| Collector emitter voltage         | $I_C = 1 \text{ mA}$                    | $V_{CEO}$ | 70   |      |      | V    |
| Emitter collector voltage         | $I_E = 100 \mu\text{A}$                 | $V_{ECO}$ | 7    |      |      | V    |
| Collector emitter cut-off current | $V_{CE} = 20 \text{ V}, I_f = 0, E = 0$ | $I_{CEO}$ |      | 10   | 100  | nA   |

#### Coupler

| Parameter                            | Test Conditions   | Symbol      | Min. | Typ. | Max. | Unit |
|--------------------------------------|---|-------------|------|------|------|------|
| Collector emitter saturation voltage | $I_F = 10 \text{ mA}, I_C = 1 \text{ mA}$                     | $V_{CEsat}$ |      |      | 0.3  | V    |
| Cut-off frequency                    | $V_{CE} = 5 \text{ V}, I_F = 10 \text{ mA}, R_L = 100 \Omega$ | $f_c$       |      | 110  |      | kHz  |
| Coupling capacitance                 | $f = 1 \text{ MHz}$   | $C_k$       |      | 0.3  |      | pF   |

#### Current Transfer Ratio (CTR)

| Parameter | Test Conditions                             | Type     | Symbol | Min. | Typ. | Max. | Unit |
|-----------|---|----------|--------|------|------|------|------|
| $I_C/I_F$ | $V_{CE} = 5 \text{ V}, I_F = 5 \text{ mA}$  | TCLT1000 | CTR    | 0.50 |      | 6.0  |      |
|           | $V_{CE} = 5 \text{ V}, I_F = 10 \text{ mA}$ | TCLT1001 | CTR    | 0.40 |      | 0.8  |      |
|           | $V_{CE} = 5 \text{ V}, I_F = 10 \text{ mA}$ | TCLT1002 | CTR    | 0.63 |      | 1.25 |      |
|           | $V_{CE} = 5 \text{ V}, I_F = 10 \text{ mA}$ | TCLT1003 | CTR    | 1.0  |      | 2.0  |      |
|           | $V_{CE} = 5 \text{ V}, I_F = 1 \text{ mA}$  | TCLT1001 | CTR    | 0.13 | 0.30 |      |      |
|           | $V_{CE} = 5 \text{ V}, I_F = 1 \text{ mA}$  | TCLT1002 | CTR    | 0.22 | 0.45 |      |      |
|           | $V_{CE} = 5 \text{ V}, I_F = 1 \text{ mA}$  | TCLT1003 | CTR    | 0.34 | 0.70 |      |      |
|           | $V_{CE} = 5 \text{ V}, I_F = 5 \text{ mA}$  | TCLT1005 | CTR    | 0.5  |      | 1.5  |      |
|           | $V_{CE} = 5 \text{ V}, I_F = 5 \text{ mA}$  | TCLT1006 | CTR    | 1.0  |      | 3.0  |      |
|           | $V_{CE} = 5 \text{ V}, I_F = 5 \text{ mA}$  | TCLT1007 | CTR    | 0.8  |      | 1.6  |      |
|           | $V_{CE} = 5 \text{ V}, I_F = 5 \text{ mA}$  | TCLT1008 | CTR    | 1.3  |      | 2.6  |      |
|           | $V_{CE} = 5 \text{ V}, I_F = 5 \text{ mA}$  | TCLT1009 | CTR    | 2.0  |      | 4.0  |      |

### Maximum Safety Ratings (according to VDE 0884) see figure 1

This optocoupler is suitable for safe electrical isolation only within the safety ratings. Compliance with the safety ratings shall be ensured by means of suitable protective circuits.

#### Input (Emitter)

| Parameters      | Test Conditions | Symbol   | Value | Unit |
|-----------------|-----------------|----------|-------|------|
| Forward current |                 | $I_{si}$ | 130   | mA   |

#### Output (Detector)

| Parameters        | Test Conditions                 | Symbol   | Value | Unit |
|-------------------|---------------------------------|----------|-------|------|
| Power dissipation | $T_{amb} \leq 25^\circ\text{C}$ | $P_{si}$ | 265   | mW   |

#### Coupler

| Parameters            | Test Conditions | Symbol                | Value | Unit             |
|-----------------------|-----------------|-----------------------|-------|------------------|
| Rated impulse voltage |                 | $V_{IO\overline{TM}}$ | 8     | kV               |
| Safety temperature    |                 | $T_{si}$              | 150   | $^\circ\text{C}$ |

### Insulation Rated Parameters (according to VDE 0884)

| Parameter   | Test Conditions  | Symbol                | Min.      | Typ. | Max. | Unit     |
|---|--|-----------------------|-----------|------|------|----------|
| Partial discharge test voltage – Routine test           | 100%, $t_{test} = 1\text{ s}$  | $V_{pd}$              | 1.6       |      |      | kV       |
| Partial discharge test voltage – Lot test (sample test) | $t_{Tr} = 60\text{ s}$ , $t_{test} = 10\text{ s}$ ,<br>(see figure 2)                  | $V_{IO\overline{TM}}$ | 8         |      |      | kV       |
|   |  | $V_{pd}$              | 1.3       |      |      | kV       |
| Insulation resistance                                   | $V_{IO} = 500\text{ V}$  | $R_{IO}$              | $10^{12}$ |      |      | $\Omega$ |
|   | $V_{IO} = 500\text{ V}$ ,<br>$T_{amb} = 100^\circ\text{C}$                             | $R_{IO}$              | $10^{11}$ |      |      | $\Omega$ |
|   | $V_{IO} = 500\text{ V}$ ,<br>$T_{amb} = 150^\circ\text{C}$<br>(construction test only) | $R_{IO}$              | $10^9$    |      |      | $\Omega$ |

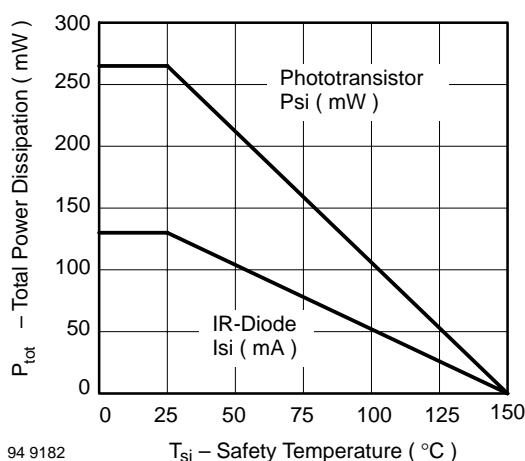


Figure 1. Derating diagram

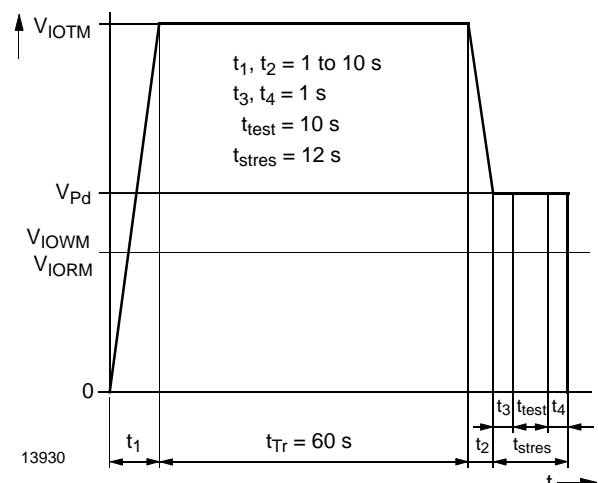


Figure 2. Test pulse diagram for sample test according to DIN VDE 0884

### Switching Characteristics

| Parameter     | Test Conditions   | Symbol    | Typ. | Unit          |
|---------------|---|-----------|------|---------------|
| Delay time    | $V_S = 5\text{ V}$ , $I_C = 2\text{ mA}$ , $R_L = 100\ \Omega$ (see figure 3)       | $t_d$     | 3.0  | $\mu\text{s}$ |
| Rise time     |   | $t_r$     | 3.0  | $\mu\text{s}$ |
| Turn-on time  |   | $t_{on}$  | 6.0  | $\mu\text{s}$ |
| Storage time  |   | $t_s$     | 0.3  | $\mu\text{s}$ |
| Fall time     |   | $t_f$     | 4.7  | $\mu\text{s}$ |
| Turn-off time |   | $t_{off}$ | 5.0  | $\mu\text{s}$ |
| Turn-on time  | $V_S = 5\text{ V}$ , $I_F = 10\text{ mA}$ , $R_L = 1\text{ k}\Omega$ (see figure 4) | $t_{on}$  | 9.0  | $\mu\text{s}$ |
| Turn-off time |   | $t_{off}$ | 10.0 | $\mu\text{s}$ |

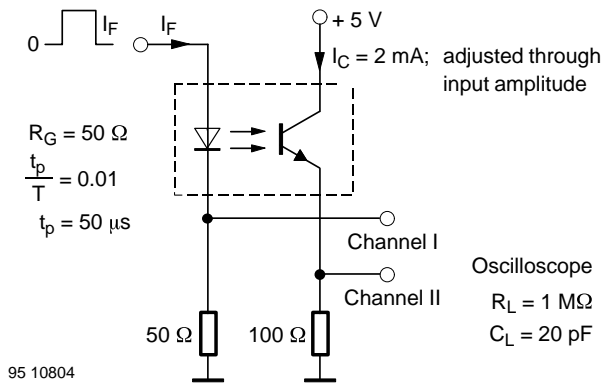


Figure 1. Test circuit, non-saturated operation

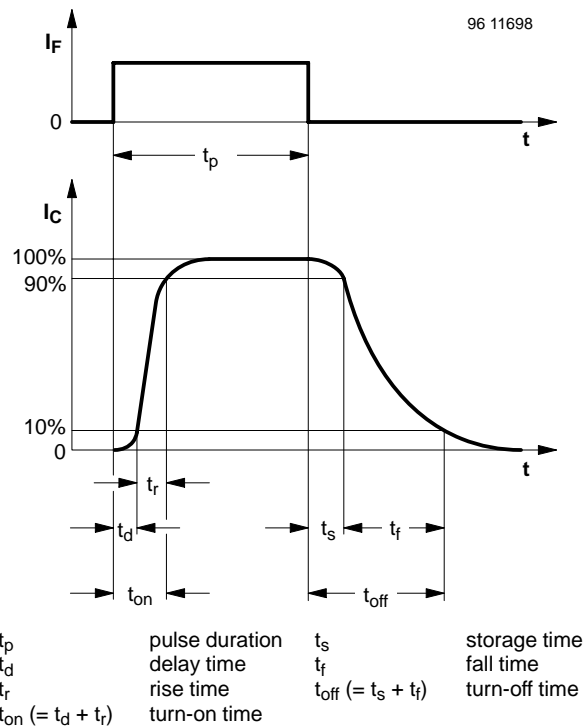


Figure 3. Switching times

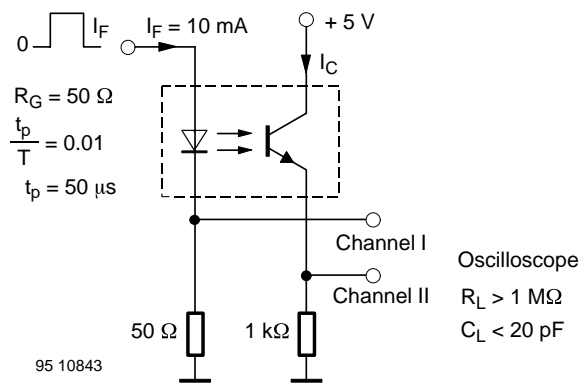


Figure 2. Test circuit, saturated operation

### Typical Characteristics ( $T_{amb} = 25^{\circ}\text{C}$ , unless otherwise specified)

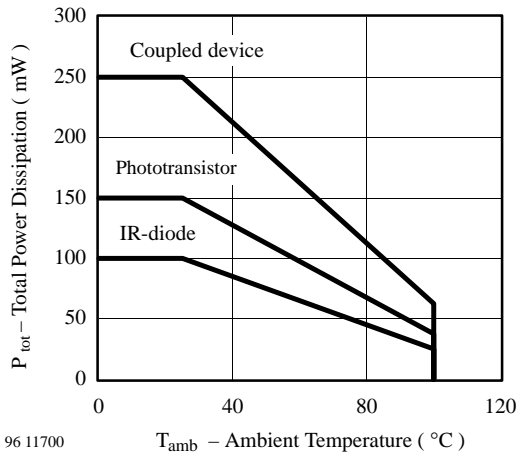


Figure 4. Total Power Dissipation vs. Ambient Temperature

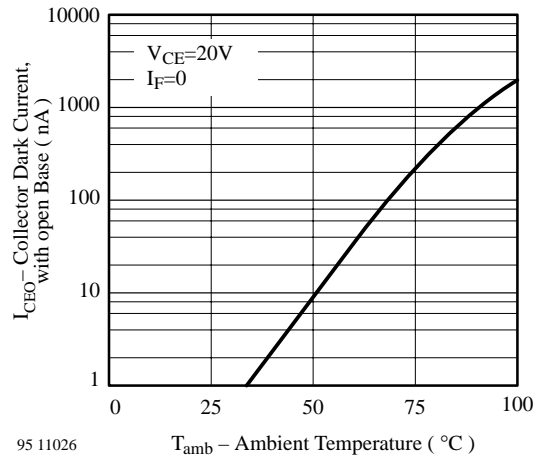


Figure 7. Collector Dark Current vs. Ambient Temperature

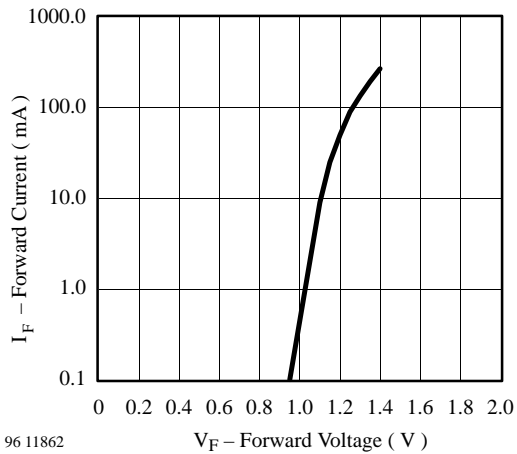


Figure 5. Forward Current vs. Forward Voltage

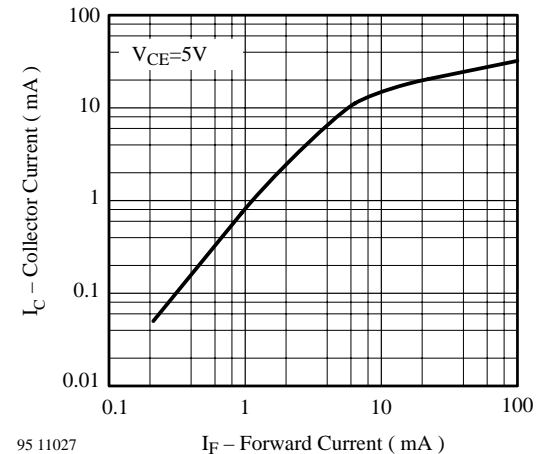


Figure 8. Collector Current vs. Forward Current

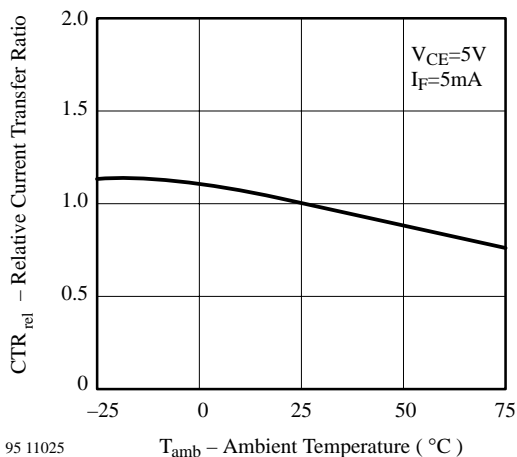


Figure 6. Relative Current Transfer Ratio vs. Ambient Temperature

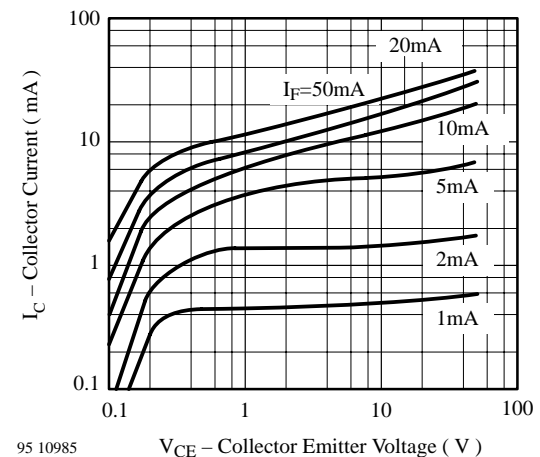


Figure 9. Collector Current vs. Collector Emitter Voltage

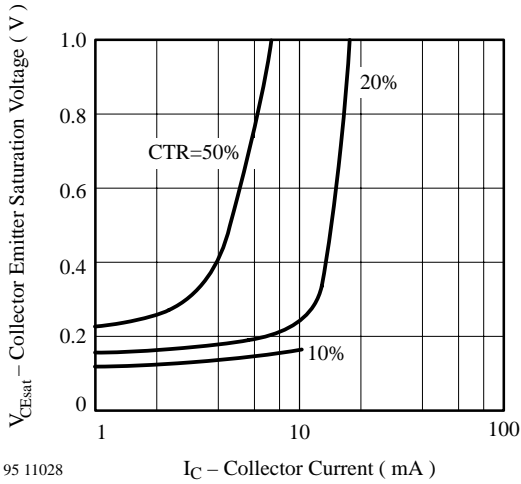


Figure 10. Collector Emitter Saturation Voltage vs. Collector Current

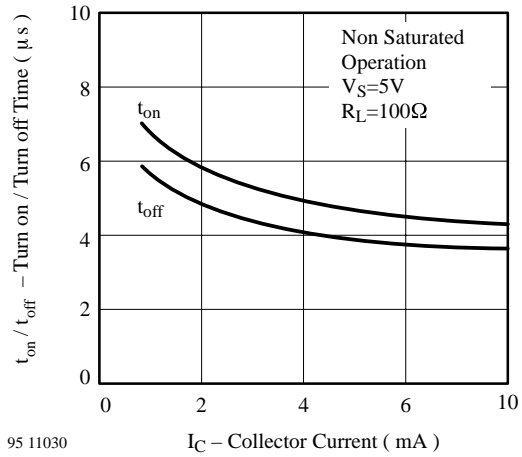


Figure 12. Turn on / off Time vs. Collector Current

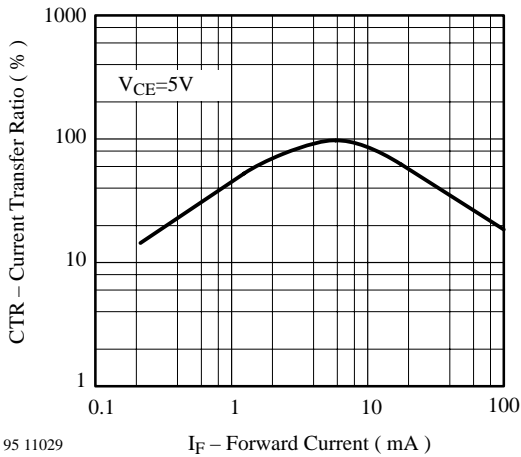


Figure 11. Current Transfer Ratio vs. Forward Current

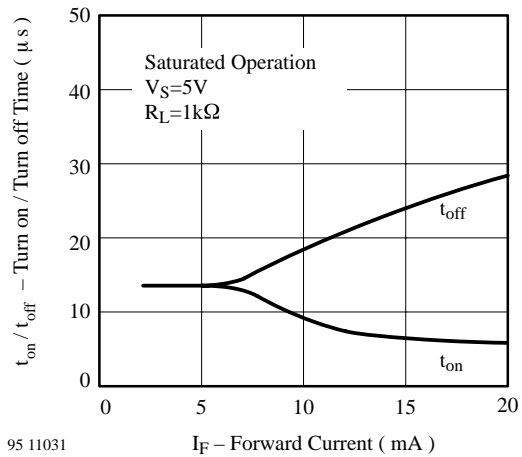


Figure 13. Turn on / off Time vs. Forward Current





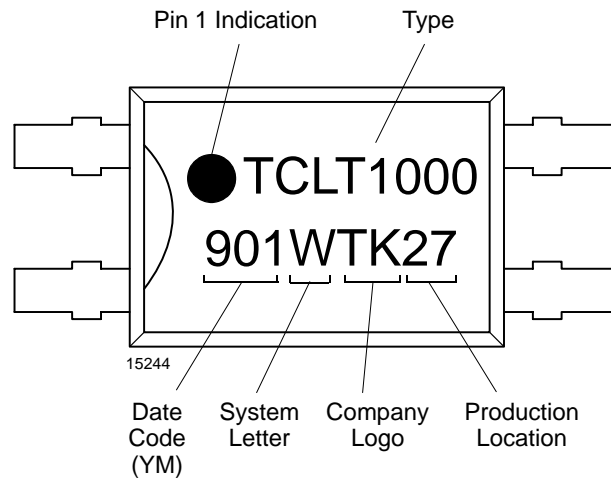


Figure 14. Marking example

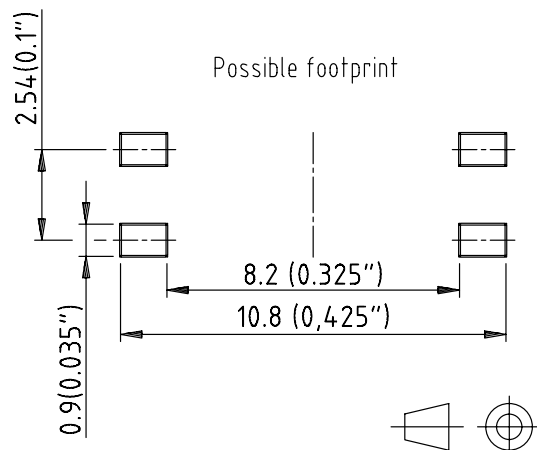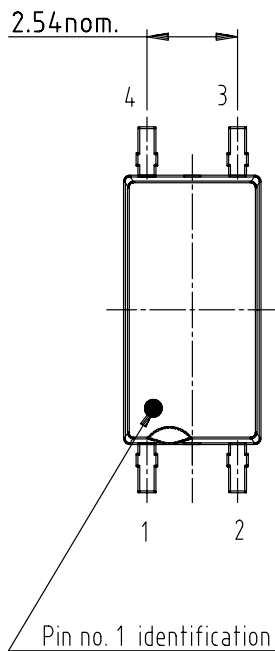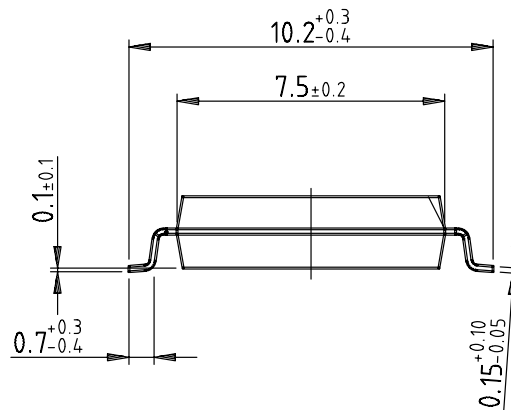

### Dimensions of TCLT10.. in mm

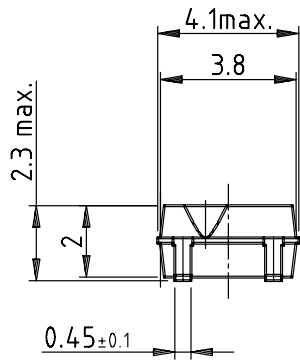

technical drawings according to DIN specifications

Drawing-No.: 6.544-5331.01-4

Issue: 1; 04.04.00


15243

# TCLT10.. Series



Vishay Telefunken


## Dimensions of Reel in mm

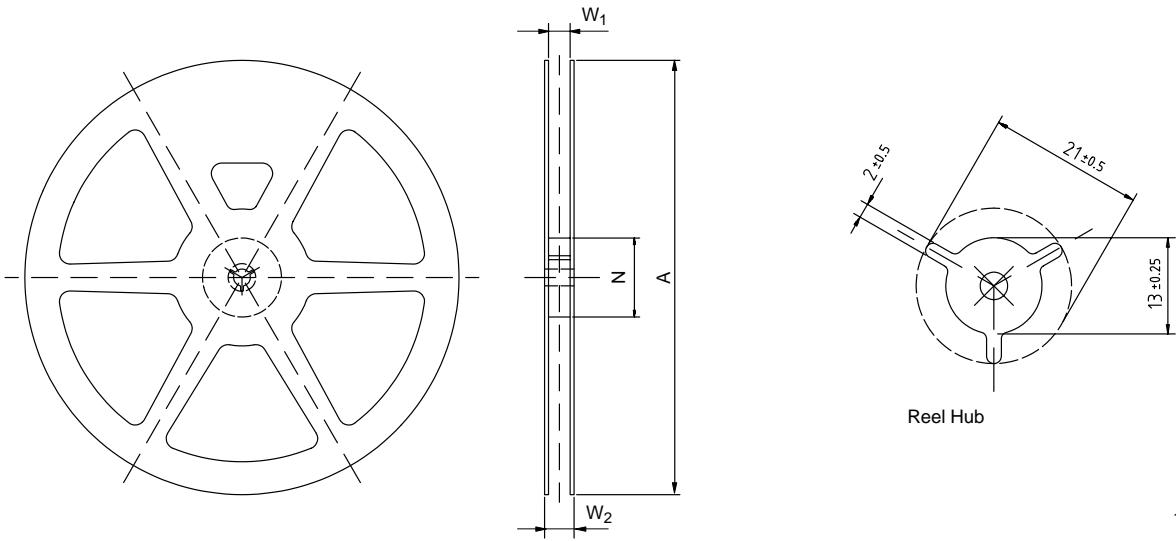

16515


| Version | Tape Width | A           | N             | $W_1$      | $W_2$ max |
|---------|------------|-------------|---------------|------------|-----------|
| G       | 16         | $330 \pm 1$ | $100 \pm 1.5$ | $16.4 + 2$ | 22.4      |

## Dimensions of Leader and Trailer in mm

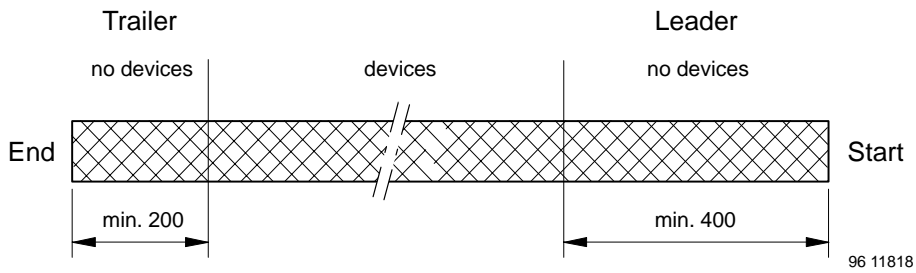

96 11818

## Dimensions of Tape in mm

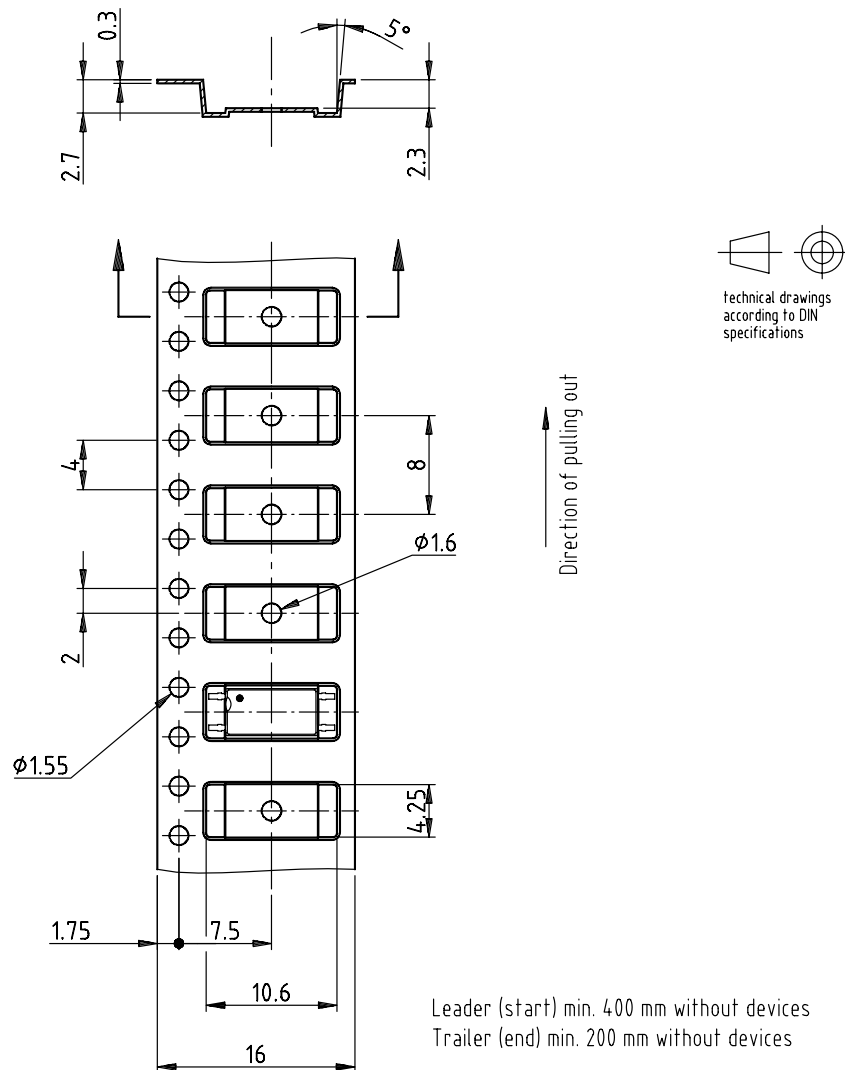

Issue: 1; 22.11.00

Drawing refers to following types: TCLT 1...

16516

### Ozone Depleting Substances Policy Statement

It is the policy of **Vishay Semiconductor GmbH** to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

**Vishay Semiconductor GmbH** has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

**Vishay Semiconductor GmbH** can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

**We reserve the right to make changes to improve technical design and may do so without further notice.**

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay Telefunken products for any unintended or unauthorized application, the buyer shall indemnify Vishay Telefunken against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany  
Telephone: 49 (0)7131 67 2831, Fax number: 49 (0)7131 67 2423