

#### FEATURES

- **OPTICAL OUTPUT POWER:**  
Po = 5.0 mW
- **LOW THRESHOLD CURRENT:**  
I<sub>TH</sub> = 12 mA
- **HIGH SPEED:**  
tr, tf = 0.5 ns MAX
- **SMSR:**  
45 dB
- **WIDE OPERATING TEMPERATURE RANGE:**  
T<sub>C</sub> = -10 to +85°C
- **InGaAs MONITOR PIN-PD**
- **CAN PACKAGE:**  
ø5.6 mm
- **BASED ON TELCORDIA RELIABILITY**

#### DESCRIPTION


NEC's NX6504 Series is a 1550 nm Multiple Quantum Well (MQW) structured Distributed Feed-Back (DFB) laser diode with InGaAs monitor PIN-PD. This device is ideal for Synchronous Digital Hierarchy (SDH) system, STM-1/OC-3, STM-4/OC-12 and ITU-T recommendations.

#### ELECTRO-OPTICAL CHARACTERISTICS (T<sub>C</sub> = 25°C, unless otherwise specified)

PART NUMBER			NX6504 Series		
SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN	TYP	MAX
V <sub>OP</sub>	Operating Voltage, Po = 5.0 mW, T <sub>C</sub> = -10 to +85°C	V	–	1.0	1.5
I <sub>TH</sub>	Threshold Current	mA	–	12	25
	T <sub>C</sub> = 85°C	mA	–	35	50
P <sub>TH</sub>	Threshold Output Power, T <sub>C</sub> = -10 to +85°C, I <sub>F</sub> = I <sub>TH</sub>	μW	–	–	200
η <sub>d</sub>	Differential Efficiency	W/A	0.15	0.25	–
Δη <sub>d</sub>	Temperature Dependence of Differential Efficiency Δη <sub>d</sub> = 10 log $\frac{\eta_d (@ 85^\circ\text{C})}{\eta_d (@ 25^\circ\text{C})}$	dB	-3.0	-1.5	–
λ <sub>p</sub>	Peak Emission Wavelength, Po = 5.0 mW, RMS (-20 dB), T <sub>C</sub> = -10 to +85°C	nm	1530	–	1570
SMSR	Side mode Suppression Ratio Po = 5.0 mW, T <sub>C</sub> = -10 to +85°C	dB	30	45	–
θ <sub>⊥</sub>	Vertical Beam Angle <sup>1</sup> , (Refer to <b>Definitions</b> ) Po = 5.0 mW, FAHM <sup>2</sup>	deg	–	30	40
θ <sub>∥</sub>	Lateral Beam Angle <sup>1</sup> , Po = 5.0 mW, FAHM <sup>2</sup>	deg	–	25	35
t <sub>r</sub>	Rise Time, 10 to 90%	ns	–	0.05	0.5
t <sub>f</sub>	Fall Time, 10 to 90%	ns	–	0.2	0.5
I <sub>m</sub>	Monitor Current, Po = 5.0 mW, V <sub>R</sub> = 5 V	μA	200	600	1000
I <sub>D</sub>	Monitor Dark Current, V <sub>R</sub> = 5 V	nA	–	0.1	10
	V <sub>R</sub> = 5 V, T <sub>C</sub> = -10 to +85°C	nA	–	–	500
C <sub>t</sub>	Monitor PD Terminal Capacitance, V <sub>R</sub> = 5 V, f = 1 MHz	pF	–	6	20
γ	Tracking Error <sup>3</sup> I <sub>m</sub> = const, (@ Po = 5.0 mW, T <sub>C</sub> = 25°C) T <sub>C</sub> = -10 to +85°C	dB	-1.0	–	1.0

Notes:

1. Applicable only to NX6504S Series.
2. FAHM: Full Angle at Half Maximum.
3. Tracking Error: γ

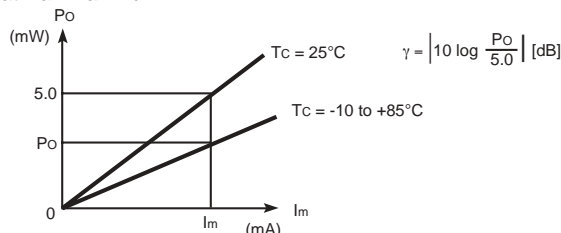

# NX6504 SERIES

## ABSOLUTE MAXIMUM RATINGS<sup>1</sup>





(T<sub>c</sub> = 25°C, unless otherwise specified)

SYMBOLS	PARAMETERS	UNITS	RATINGS
P <sub>f</sub>	Optical Output Power	mW	10
I <sub>F</sub>	Forward Current of LD	mA	150
V <sub>R</sub>	Reverse Voltage of LD	V	2.0
I <sub>F</sub>	Forward Current of PD	mA	10
V <sub>R</sub>	Reverse Voltage of PD	V	20
T <sub>c</sub>	Operating Case Temperature	°C	-10 to +85
T <sub>STG</sub>	Storage Temperature	°C	-40 to +85
T <sub>SLD</sub>	Lead Soldering Temperature (10 s)	°C	350 (3 sec.)
RH	Relative Humidity (noncondensing)	%	85




Note:

1. Operation in excess of any one of these parameters may result in permanent damage.

## TYPICAL PERFORMANCE CURVES (T<sub>c</sub> = -10 to +85°C)

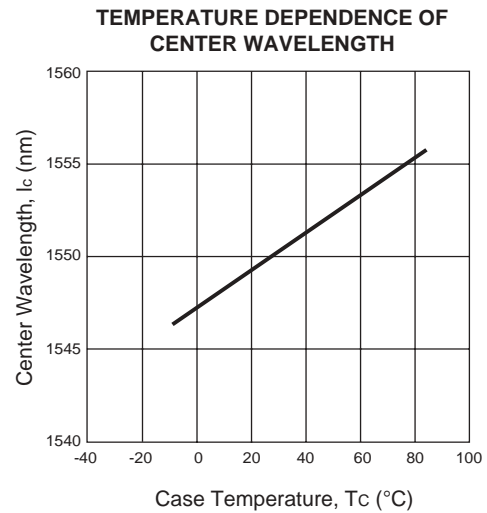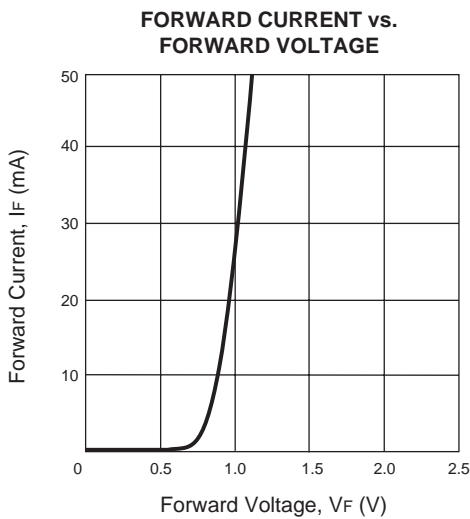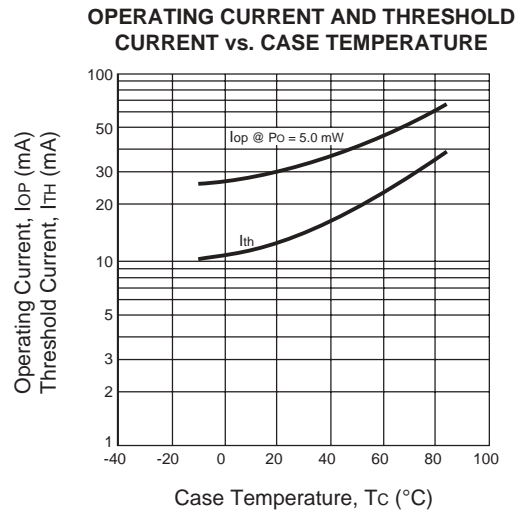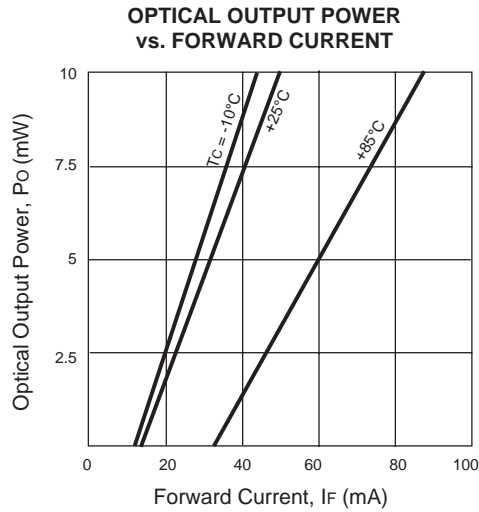

TYPICAL PERFORMANCE CURVES (T<sub>C</sub> = 25°C)

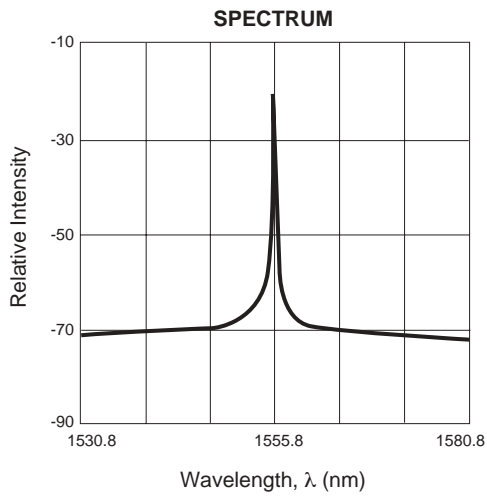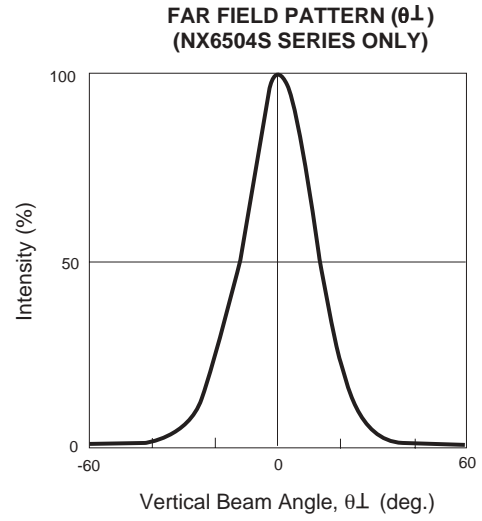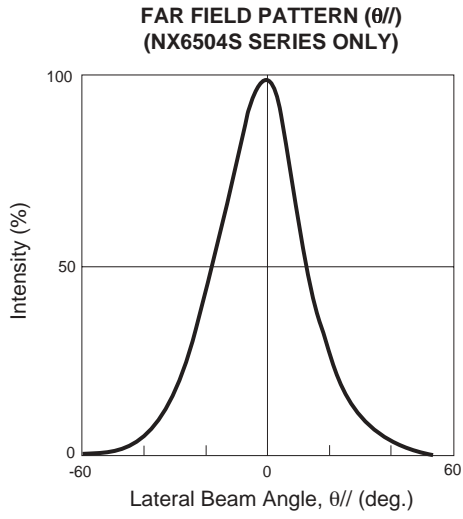


Note: The graphs indicate nominal characteristics.

# NX6504 SERIES


## OUTLINE DIMENSIONS (Units in mm)

### NX6504S SERIES

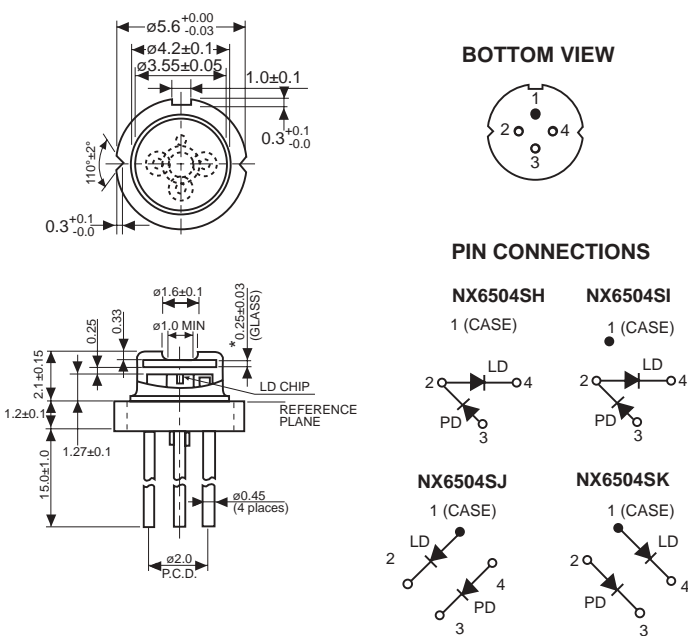

\* n = 1.48 Bolosilicate Glass

### NX6504G SERIES

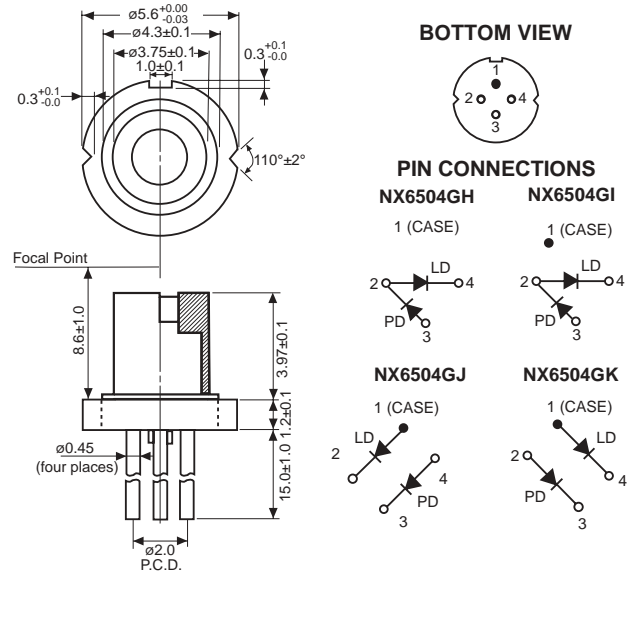

## ORDERING INFORMATION

### NX6504S SERIES

PART NUMBER	PACKAGE
NX6504SH	4-pin CAN with flat glass cap
NX6504SI	
NX6504SJ	
NX6504SK	

### NX6504G SERIES

PART NUMBER	PACKAGE
NX6504GH	4-pin CAN with aspherical lens cap
NX6504GI	
NX6504GJ	
NX6504GK	

#### Life Support Applications

These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.

**CEL** California Eastern Laboratories, Your source for NEC RF, Microwave, Optoelectronic, and Fiber Optic Semiconductor Devices.

4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • FAX (408) 988-0279 • [www.cel.com](http://www.cel.com)

DATA SUBJECT TO CHANGE WITHOUT NOTICE

02/19/2003