

**Type RST**  
**Time Lag Radial Lead Micro Fuse Series**

RoHS Compliant

RSTD1005



**Electrical Characteristics** (IEC 127-3 STANDARD SHEET 4)

Rated Current	1.5 In		2.1 In		2.75 In		4 In		10 In	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
80mA to 6.3A inclusive	1 hr.	2 min.	400 ms	10 sec	150 ms	3 sec	20 ms	150 ms		

**Approvals**



Safety Agency Approvals	Amp range / Volt @ I.R.ability
Certificate No. 312375	80mA to 5A / 250V AC @ 35A or 10 In whichever is greater
License No. 40006162 License No. 40011144	80mA to 1.25A / 250V AC @ 35A 800mA / 250V AC @ 35A 1.6A to 4A / 250V AC @ 100A
Recognized File No. E20624	80mA to 6.3A / 277V AC @ 100A
Approved File No. JET1037-31007-1001	1A to 5A / 250V AC @ 100A
License No. 2004010207111444	80mA to 5A / 250V AC @ 35A or 10 In whichever is greater

**RoHS Compliant Product**

RoHS Wave Soldering Compatible : (260°C, 10 sec max)

**Environmental Specification**

**Shock Resistance**

MIL-STD-202G, Method 213B, Condition I  
(100 G's peak for 6 milliseconds; Sawtooth Waveform)

**Vibration Resistance**

10-55 Hz x 3 axis/ no load (MIL-STD-202G, Method 201A)

**Salt Spray Resistance**

MIL-STD-202G, Method 101E, Condition B (48Hrs)

**Solderability**

MIL-STD-202G, Method 208H

**Soldering Heat Resistance**

MIL-STD-202G Method 210F, Test Condition C. Top Side  
(260°C, 20 sec)

**Moisture Resistance**

MIL-STD-202G, Method 106G

**Operating Temperature**

-55°C to +125°C

**Physical Specification**

**Materials**

Base and Cover:  
Black thermoplastic, UL 94-V0

Pins:  
Tin plated copper alloy

Catalog Number	Ampere Rating	Typical Cold Resistance (ohm)	Volt-drop @100% In (Vol) max.	Melting I <sup>2</sup> T < 10 mSec (A <sup>2</sup> Sec)	Melting I <sup>2</sup> T @ 10 In (A <sup>2</sup> Sec)	Maximum Power Dissipation (W)
RST 80	80mA	3.30	0.40	0.01	0.01	0.10
RST 100	100mA	2.20	0.35	0.02	0.02	0.11
RST 125	125mA	1.50	0.30	0.04	0.04	0.13
RST 160	160mA	1.00	0.26	0.07	0.06	0.15
RST 200	200mA	0.70	0.23	0.12	0.11	0.17
RST 250	250mA	0.50	0.22	0.38	0.41	0.19
RST 315	315mA	0.38	0.19	0.60	0.66	0.22
RST 400	400mA	0.28	0.16	0.90	1.00	0.25
RST 500	500mA	0.211	0.15	1.50	1.70	0.29
RST 630	630mA	0.156	0.13	2.40	2.60	0.33
RST 800	800mA	0.115	0.12	3.70	4.20	0.38
RST 1	1A	0.085	0.11	5.90	6.70	0.44
RST 1.25	1.25A	0.063	0.10	9.30	10.70	0.51
RST 1.6	1.6A	0.047	0.10	15	17	0.58
RST 2	2A	0.035	0.090	23	27	0.67
RST 2.5	2.5A	0.026	0.087	37	43	0.77
RST 3.15	3.15A	0.019	0.083	58	69	0.88
RST 4	4A	0.014	0.080	92	110	1.02
RST 5	5A	0.010	0.077	145	175	1.17
RST 6.3	6.3A	0.008	0.073	230	281	1.34

Consult manufacturer for other ratings

**Marking**

On fuse:

“bel”, “T”, “Current Rating”, “250V” and “Appropriate Safety Logos”

On label:


“bel”, “RST”, “Current Rating”, “Voltage Rating”, “Interrupting Rating”, “Appropriate Safety Logos” and “” for RoHS Version

**Packaging**

1. In bulk: 1,000 pcs per box.

2. On Tape: Ammo pack, 1,000 pcs per box per EIA-468-A and IEC-286-2

**Mechanical Dimensions**

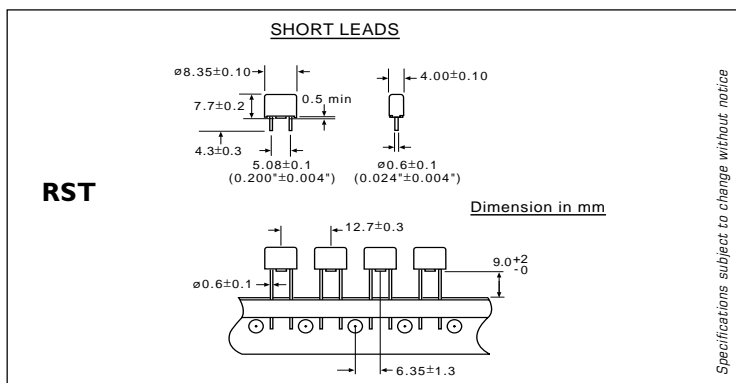


ORDERING INFORMATION SEE LAST 2 PAGES

**Type RST**  
Time Lag Radial Lead Micro Fuse Series

RoHS Compliant

RSTC1004

**RST - TIME CURRENT CHARACTERISTIC CURVE**

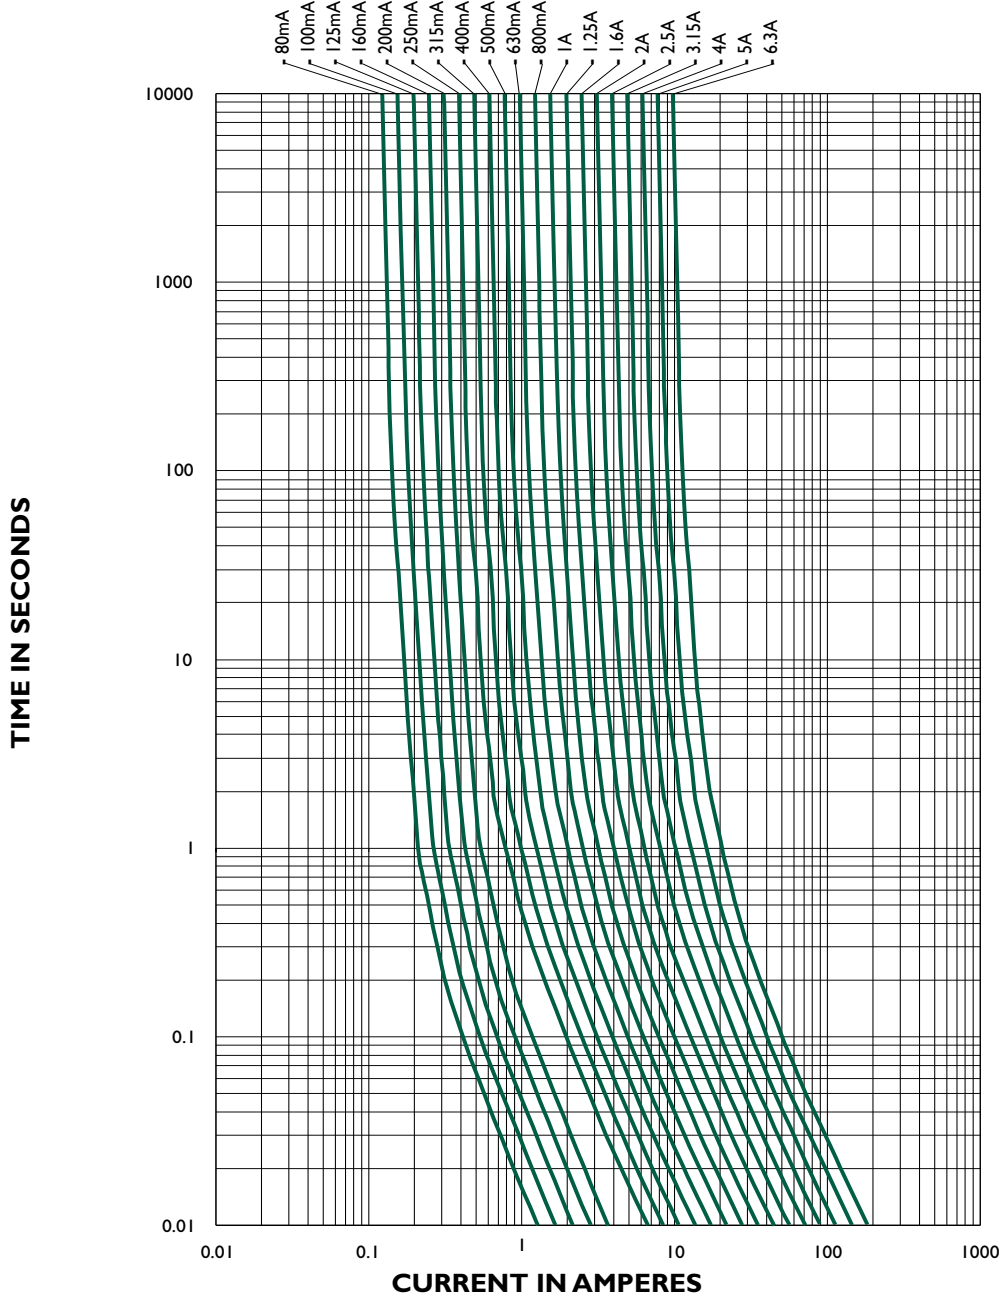

Specifications subject to change without notice

NOTE - see important information under "User Guide" on P.08

**Corporate Office**  
Bel Fuse Inc.  
206 Van Vorst Street, Jersey City, NJ 07302  
Tel: 201-432-0463  
Fax: 201-432-9542  
E-Mail: [belfuse@belfuse.com](mailto:belfuse@belfuse.com)  
Website: [www.belfuse.com](http://www.belfuse.com)

**Far East Office**  
Bel Fuse Ltd.  
8F/8 Luk Hop Street  
San Po Kong  
Kowloon, Hong Kong  
Tel: 852-2328-5515  
Fax: 852-2352-3706

**European Office**  
Bel Fuse Europe Ltd.  
Preston Technology Management Centre  
Marsh Lane, Preston PR1 8UD  
Lancashire, U.K  
Tel: 44-1772-556601  
Fax: 44-1772-888366