



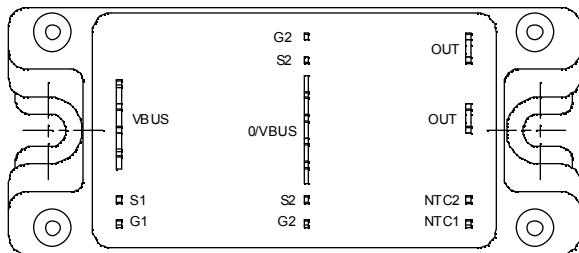

**Phase leg
MOSFET Power Module**

V_{DSS} = 1000V
R_{DSon} = 180mΩ typ @ T_j = 25°C
I_D = 43A @ T_c = 25°C

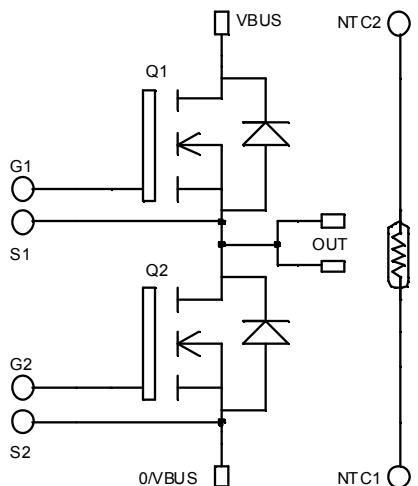

Application

- Welding converters
- Switched Mode Power Supplies
- Uninterruptible Power Supplies
- Motor control

Features

- Power MOS 7® FREDFETs
 - Low R_{DSon}
 - Low input and Miller capacitance
 - Low gate charge
 - Fast intrinsic reverse diode
 - Avalanche energy rated
 - Very rugged
- Kelvin source for easy drive
- Very low stray inductance
 - Symmetrical design
 - Lead frames for power connections
- Internal thermistor for temperature monitoring
- High level of integration

Benefits

- Outstanding performance at high frequency operation
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Solderable terminals both for power and signal for easy PCB mounting
- Low profile
- RoHS compliant

Absolute maximum ratings

Symbol	Parameter	Max ratings	Unit
V _{DSS}	Drain - Source Breakdown Voltage	1000	V
I _D	Continuous Drain Current	T _c = 25°C T _c = 80°C	43 33
I _{DM}	Pulsed Drain current		
V _{GS}	Gate - Source Voltage	±30	V
R _{DSon}	Drain - Source ON Resistance	210	mΩ
P _D	Maximum Power Dissipation	T _c = 25°C	780
I _{AR}	Avalanche current (repetitive and non repetitive)		
E _{AR}	Repetitive Avalanche Energy	25	A
E _{AS}	Single Pulse Avalanche Energy	50	mJ
		3000	

CAUTION: These Devices are sensitive to Electrostatic Discharge. Proper Handing Procedures Should Be Followed. See application note APT0502 on www.microsemi.com

All ratings @ $T_j = 25^\circ\text{C}$ unless otherwise specified

Electrical Characteristics

Symbol	Characteristic	Test Conditions		Min	Typ	Max	Unit
I_{DSS}	Zero Gate Voltage Drain Current	$V_{GS} = 0\text{V}$, $V_{DS} = 1000\text{V}$	$T_j = 25^\circ\text{C}$			200	μA
		$V_{GS} = 0\text{V}$, $V_{DS} = 800\text{V}$	$T_j = 125^\circ\text{C}$			1000	
$R_{DS(on)}$	Drain – Source on Resistance	$V_{GS} = 10\text{V}$, $I_D = 21.5\text{A}$			180	210	$\text{m}\Omega$
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS} = V_{DS}$, $I_D = 5\text{mA}$		3		5	V
I_{GSS}	Gate – Source Leakage Current	$V_{GS} = \pm 30\text{ V}$, $V_{DS} = 0\text{V}$				± 150	nA

Dynamic Characteristics

Symbol	Characteristic	Test Conditions		Min	Typ	Max	Unit
C_{iss}	Input Capacitance	$V_{GS} = 0\text{V}$ $V_{DS} = 25\text{V}$ $f = 1\text{MHz}$			10.4		nF
C_{oss}	Output Capacitance				1.76		
C_{rss}	Reverse Transfer Capacitance				0.32		
Q_g	Total gate Charge	$V_{GS} = 10\text{V}$ $V_{Bus} = 500\text{V}$ $I_D = 43\text{A}$			372		nC
Q_{gs}	Gate – Source Charge				48		
Q_{gd}	Gate – Drain Charge				244		
$T_{d(on)}$	Turn-on Delay Time	Inductive switching @ 125°C $V_{GS} = 15\text{V}$ $V_{Bus} = 670\text{V}$ $I_D = 43\text{A}$			18		ns
T_r	Rise Time				12		
$T_{d(off)}$	Turn-off Delay Time				155		
T_f	Fall Time		$R_G = 2.5\Omega$		40		
E_{on}	Turn-on Switching Energy	Inductive switching @ 25°C $V_{GS} = 15\text{V}$, $V_{Bus} = 670\text{V}$ $I_D = 43\text{A}$, $R_G = 2.5\Omega$			1800		μJ
E_{off}	Turn-off Switching Energy				1246		
E_{on}	Turn-on Switching Energy		Inductive switching @ 125°C $V_{GS} = 15\text{V}$, $V_{Bus} = 670\text{V}$ $I_D = 43\text{A}$, $R_G = 2.5\Omega$		2846		μJ
E_{off}	Turn-off Switching Energy				1558		

Source - Drain diode ratings and characteristics

Symbol	Characteristic	Test Conditions		Min	Typ	Max	Unit	
I_S	Continuous Source current (Body diode)		$T_c = 25^\circ\text{C}$			43	A	
			$T_c = 80^\circ\text{C}$			33		
V_{SD}	Diode Forward Voltage	$V_{GS} = 0\text{V}$, $I_S = - 43\text{A}$				1.3	V	
dv/dt	Peak Diode Recovery ①					18	V/ns	
t_{rr}	Reverse Recovery Time	$I_S = - 43\text{A}$ $V_R = 670\text{V}$ $dI/dt = 200\text{A}/\mu\text{s}$	$T_j = 25^\circ\text{C}$			320	ns	
			$T_j = 125^\circ\text{C}$			650		
Q_{rr}	Reverse Recovery Charge		$T_j = 25^\circ\text{C}$		7.2		μC	
			$T_j = 125^\circ\text{C}$		19.5			

 ① dv/dt numbers reflect the limitations of the circuit rather than the device itself.

 $I_S \leq - 43\text{A}$ $di/dt \leq 700\text{A}/\mu\text{s}$ $V_R \leq V_{DSS}$ $T_j \leq 150^\circ\text{C}$



Thermal and package characteristics

Symbol Characteristic

Min Typ Max Unit

R _{thJC}	Junction to Case Thermal resistance			0.16	°C/W	
V _{ISOL}	RMS Isolation Voltage, any terminal to case t = 1 min, I isol<1mA, 50/60Hz	2500			V	
T _J	Operating junction temperature range	-40		150	°C	
T _{STG}	Storage Temperature Range	-40		125		
T _C	Operating Case Temperature	-40		100		
Torque	Mounting torque	To Heatsink	M5	2.5	4.7	N.m
Wt	Package Weight			160	g	

Temperature sensor NTC (see application note APT0406 on www.microsemi.com for more information).


Symbol Characteristic

Min Typ Max Unit

R ₂₅	Resistance @ 25°C		50		kΩ
B _{25/85}	T ₂₅ = 298.15 K		3952		K






$$R_T = \frac{R_{25}}{\exp\left[B_{25/85}\left(\frac{1}{T_{25}} - \frac{1}{T}\right)\right]} \quad \begin{array}{l} T: \text{Thermistor temperature} \\ R_T: \text{Thermistor value at } T \end{array}$$







SP4 Package outline (dimensions in mm)






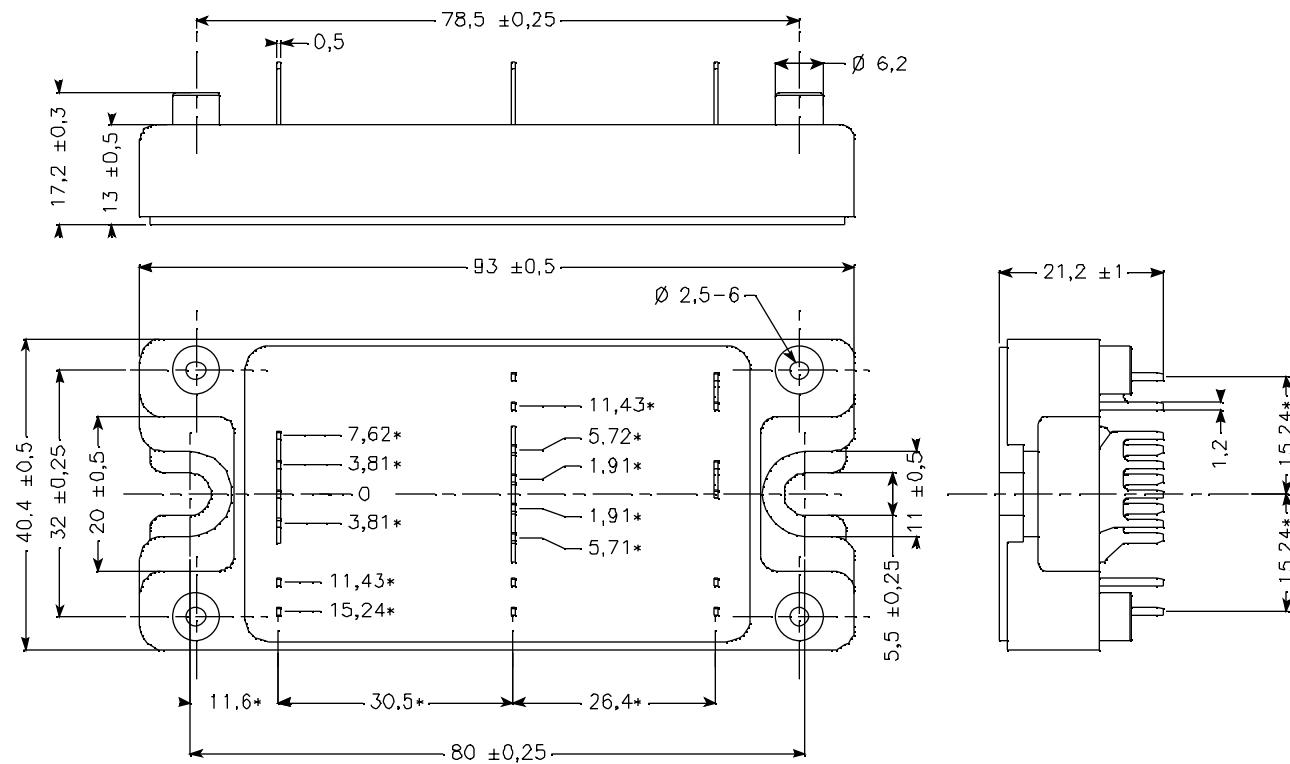


ALL DIMENSIONS MARKED " * " ARE TOLERENCED AS : ± 0.25

See application note APT0501 - Mounting Instructions for SP4 Power Modules on www.microsemi.com

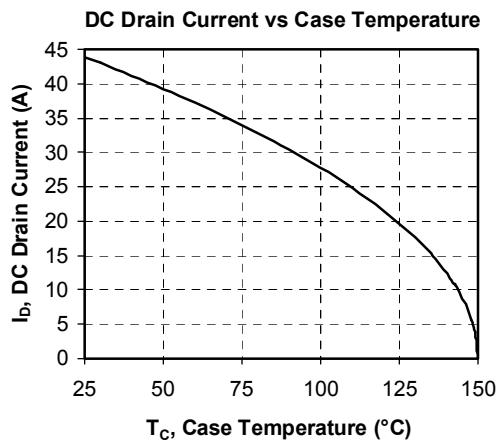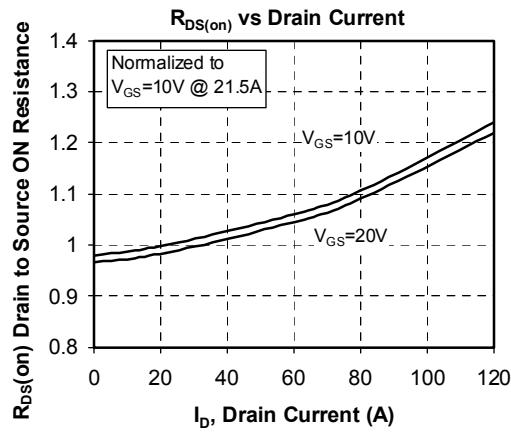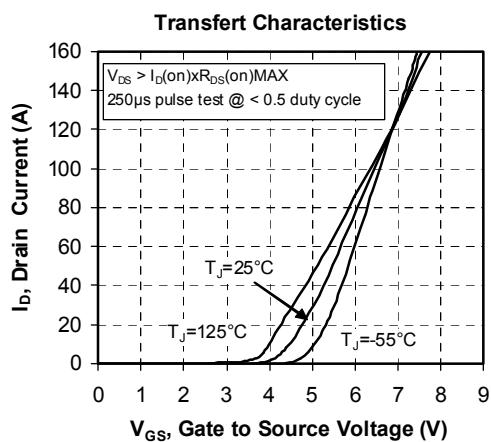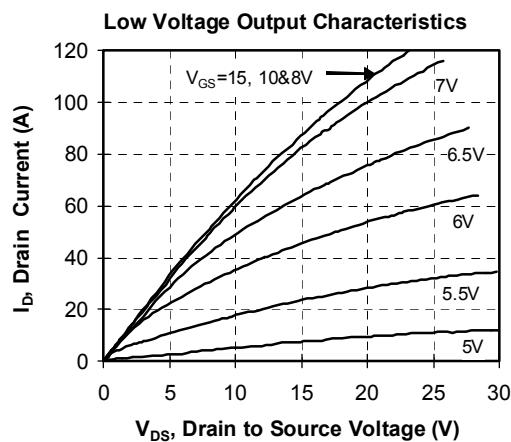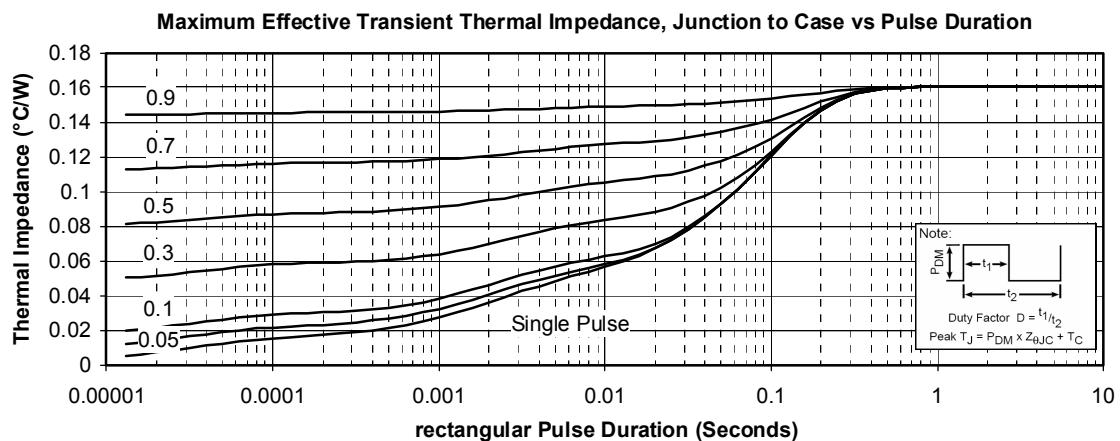Typical Performance Curve

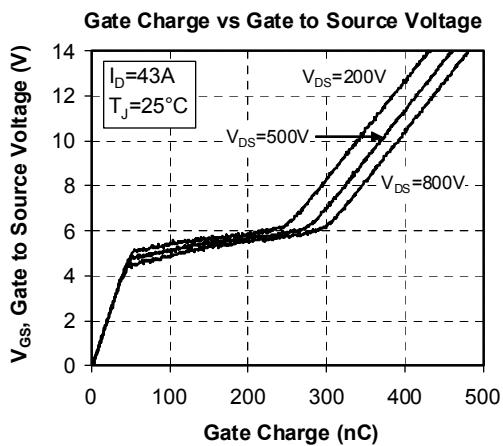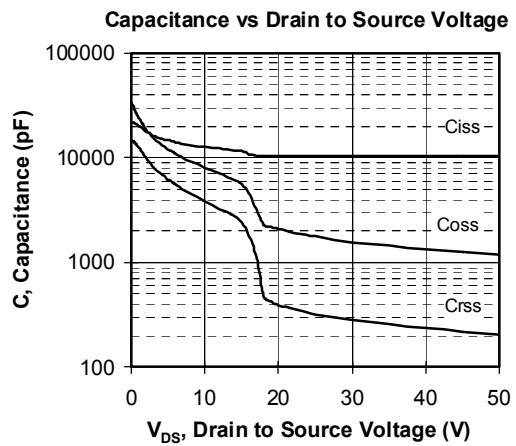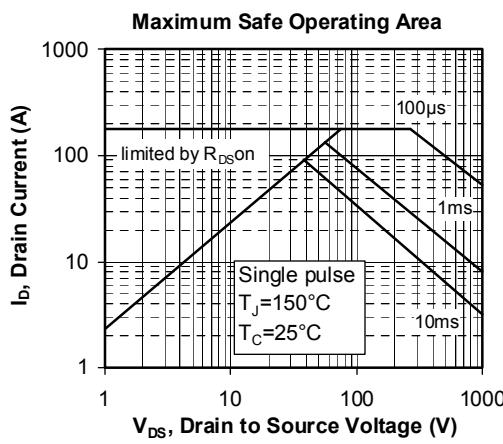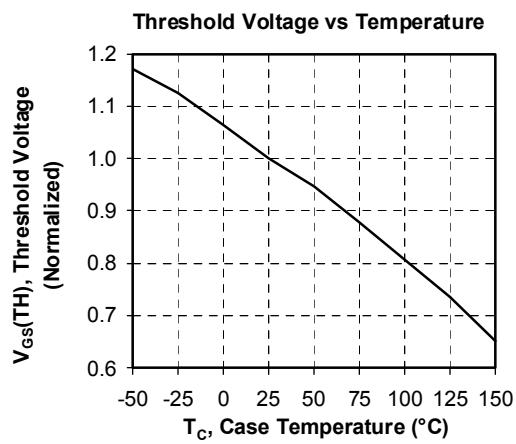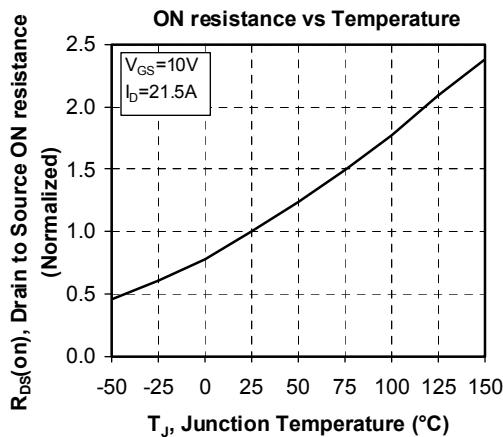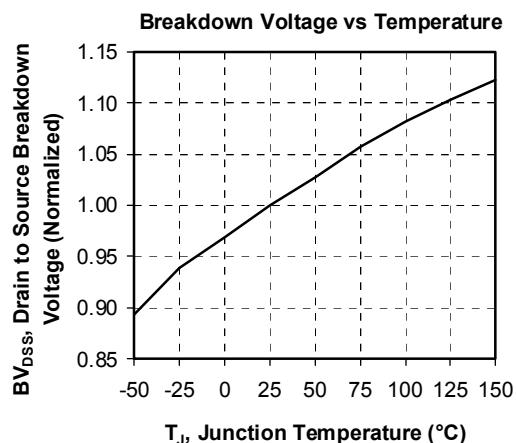

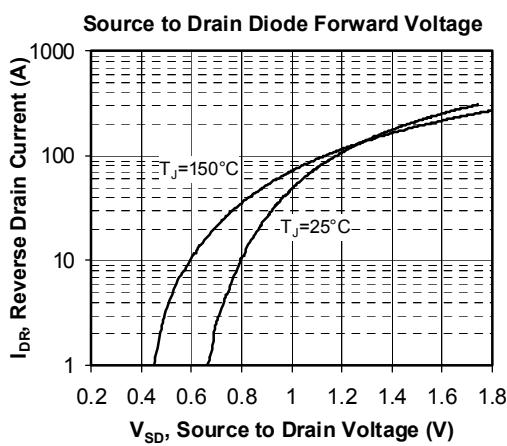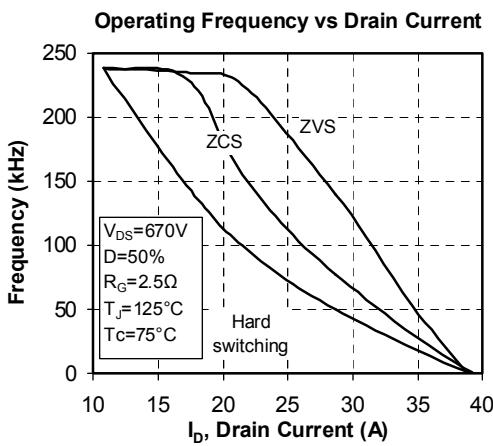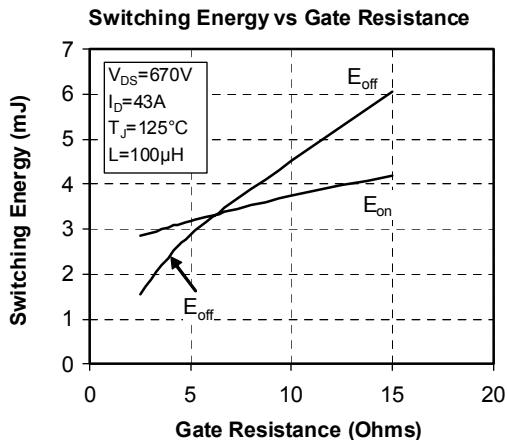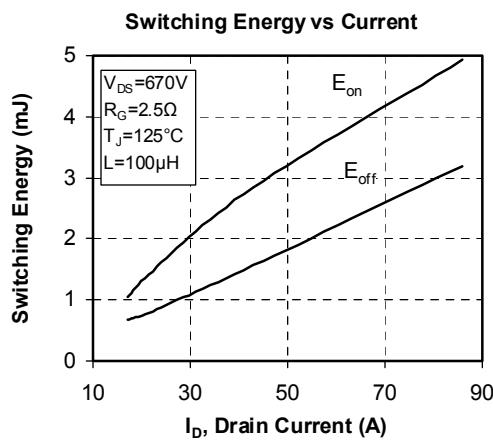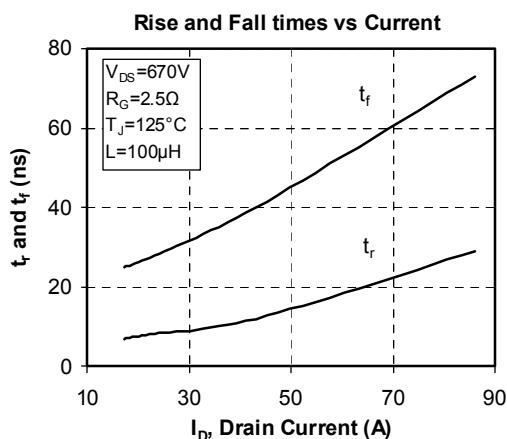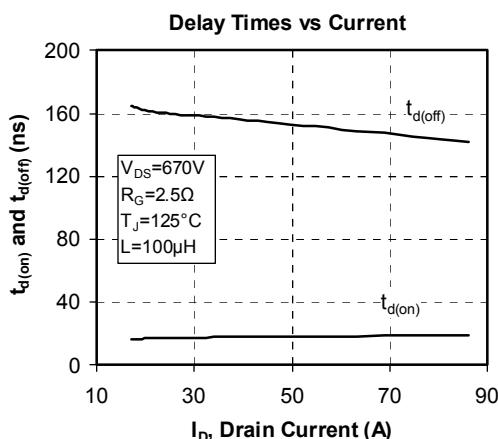


Microsemi reserves the right to change, without notice, the specifications and information contained herein

Microsemi's products are covered by one or more of U.S patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 and foreign patents. U.S and Foreign patents pending. All Rights Reserved.