


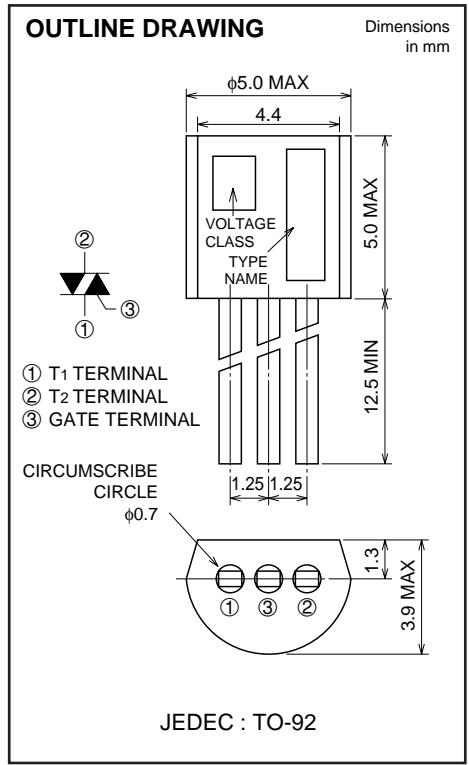
CR04AM

LOW POWER USE
GLASS PASSIVATION TYPE

CR04AM



- $I_T (AV)$ **0.4A**
- V_{DRM} **400V/600V**
- I_{GT} **100 μ A**



APPLICATION

Ignitor, solid state relay, strobe flasher, circuit breaker, other general purpose control applications

MAXIMUM RATINGS

Symbol	Parameter	Voltage class		Unit
		8	12	
VRRM	Repetitive peak reverse voltage	400	600	V
VRSM	Non-repetitive peak reverse voltage	500	720	V
VR (DC)	DC reverse voltage	320	480	V
VDRM	Repetitive peak off-state voltage *1	400	600	V
VD (DC)	DC off-state voltage *1	320	480	V

Symbol	Parameter	Conditions	Ratings	Unit
$I_T (RMS)$	RMS on-state current		0.63	A
$I_T (AV)$	Average on-state current	Commercial frequency, sine half wave, 180° conduction, $T_a=54^\circ\text{C}$	0.4	A
I_{TSM}	Surge on-state current	60Hz sine half wave 1 full cycle, peak value, non-repetitive	10	A
I^2_t	I^2_t for fusing	Value corresponding to 1 cycle of half wave 60Hz, surge on-state current	0.4	A ² s
PGM	Peak gate power dissipation		0.5	W
PG (AV)	Average gate power dissipation		0.1	W
VFGM	Peak gate forward voltage		6	V
VRGM	Peak gate reverse voltage		6	V
IFGM	Peak gate forward current		0.3	A
T_j	Junction temperature		-40 ~ +125	°C
T_{stg}	Storage temperature		-40 ~ +125	°C
—	Weight	Typical value	0.23	g

*1. With Gate-to-cathode resistance $R_{GK}=1k\Omega$

CR04AM

LOW POWER USE
GLASS PASSIVATION TYPE

ELECTRICAL CHARACTERISTICS


Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
IRRM	Repetitive peak reverse current	$T_j=125^\circ\text{C}$, V_{RRM} applied	—	—	0.5	mA
IDRM	Repetitive peak off-state current	$T_j=125^\circ\text{C}$, V_{DRM} applied, $R_{GK}=1\text{k}\Omega$	—	—	0.5	mA
V _{TM}	On-state voltage	$T_a=25^\circ\text{C}$, $I_{TM}=1.2\text{A}$, instantaneous value	—	—	1.2	V
V _{GT}	Gate trigger voltage	$T_a=25^\circ\text{C}$, $V_D=6\text{V}$, $I_T=0.1\text{A}$ *3	—	—	0.8	V
V _{GD}	Gate non-trigger voltage	$T_j=125^\circ\text{C}$, $V_D=1/2V_{DRM}$, $R_{GK}=1\text{k}\Omega$	0.2	—	—	V
I _{GT}	Gate trigger current	$T_j=25^\circ\text{C}$, $V_D=6\text{V}$, $I_T=0.1\text{A}$ *3	1	—	100*2	μA
I _H	Holding current	$T_j=25^\circ\text{C}$, $V_D=12\text{V}$, $R_{GK}=1\text{k}\Omega$	—	1.5	3	mA
R _{th(j-a)}	Thermal resistance	Junction to ambient	—	—	150	$^\circ\text{C/W}$

*2. If special values of I_{GT} are required, choose at least two items from those listed in the table below. (Example: AB, BC)

Item	A	B	C
I _{GT} (μA)	1 ~ 30	20 ~ 50	40 ~ 100



The above values do not include the current flowing through the 1k Ω resistance between the gate and cathode.

*3. I_{GT}, V_{GT} measurement circuit.

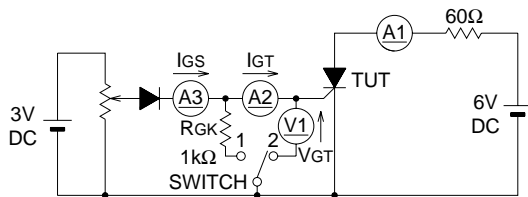







SWITCH 1 : I_{GT} measurement
SWITCH 2 : V_{GT} measurement
(Inner resistance of voltage meter is about 1k Ω)

PERFORMANCE CURVES

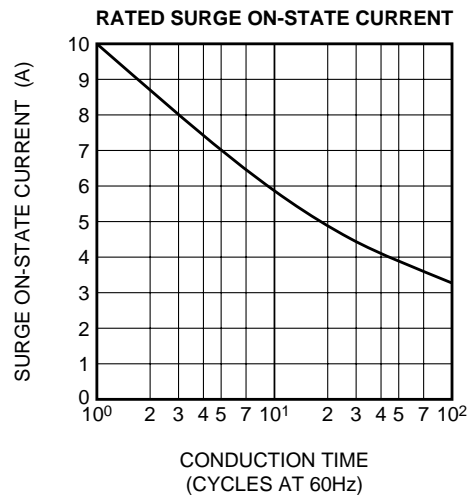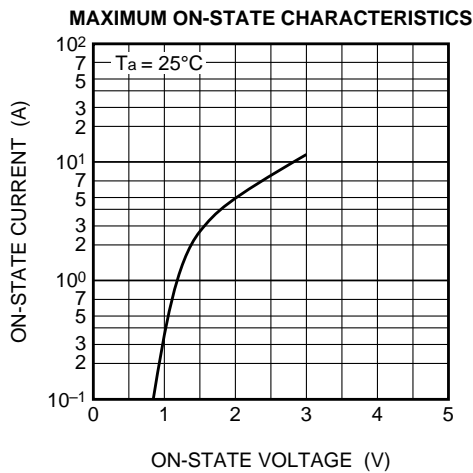

CR04AM


LOW POWER USE
GLASS PASSIVATION TYPE

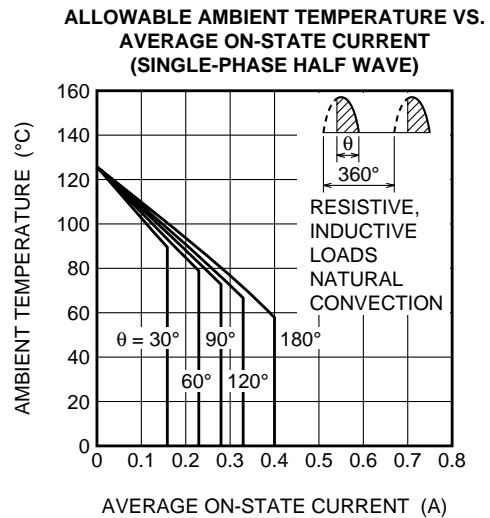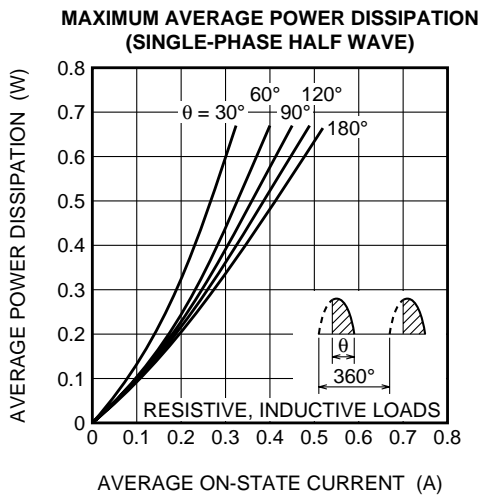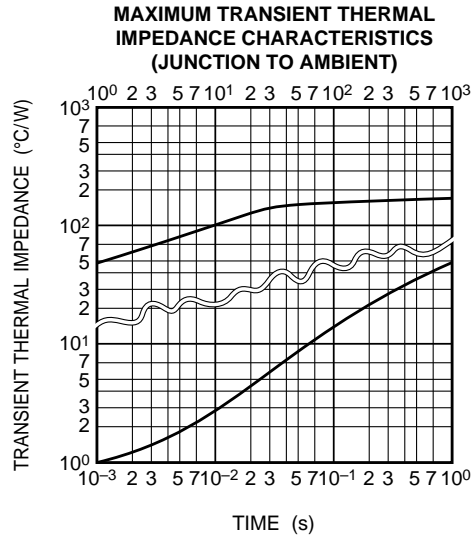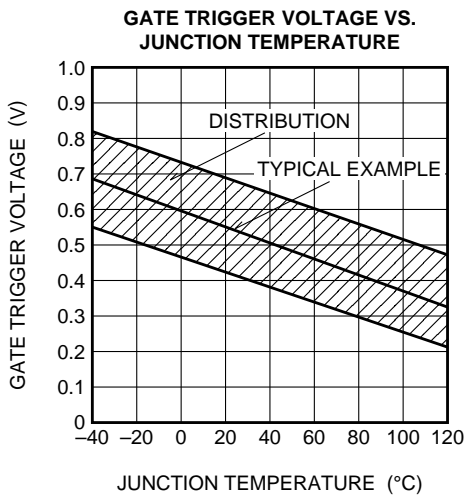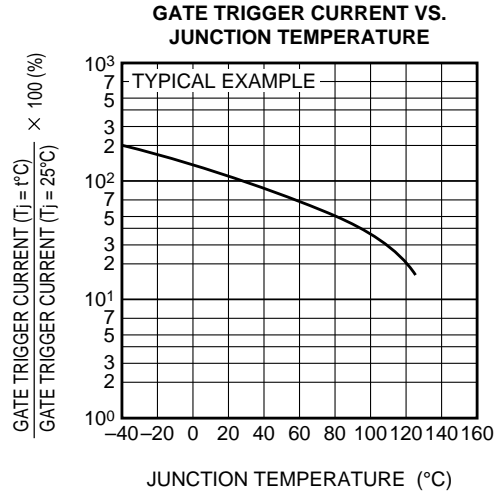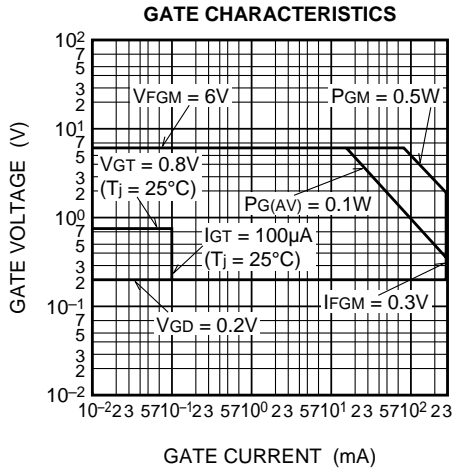


CR04AM

LOW POWER USE
GLASS PASSIVATION TYPE


**MAXIMUM AVERAGE POWER DISSIPATION
(SINGLE-PHASE FULL WAVE)**

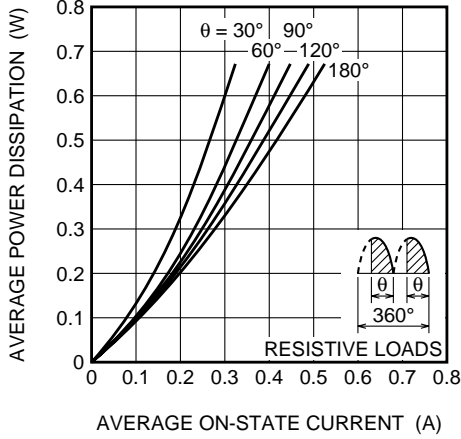


**ALLOWABLE AMBIENT TEMPERATURE VS.
AVERAGE ON-STATE CURRENT
(SINGLE-PHASE FULL WAVE)**

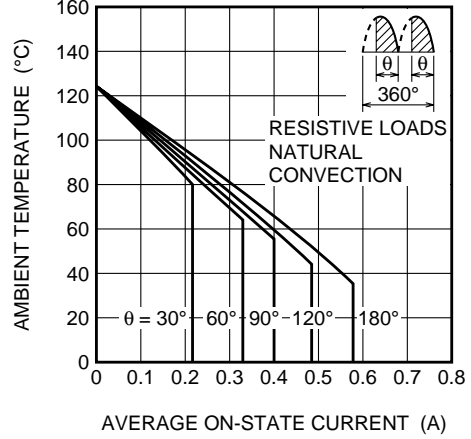


**MAXIMUM AVERAGE POWER DISSIPATION
(RECTANGULAR WAVE)**

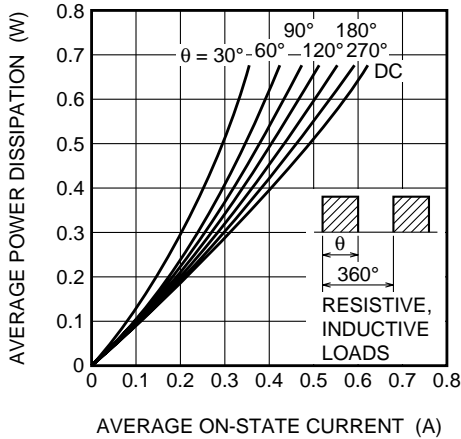


**ALLOWABLE AMBIENT TEMPERATURE VS.
AVERAGE ON-STATE CURRENT
(RECTANGULAR WAVE)**

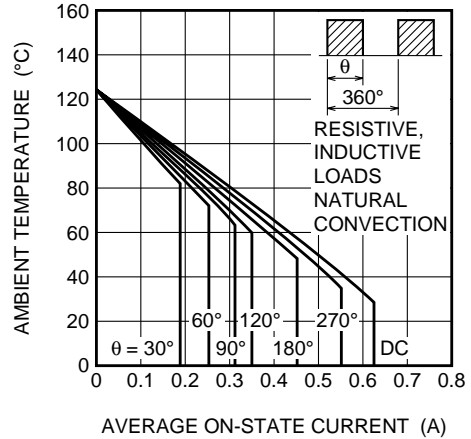

**BREAKOVER VOLTAGE VS.
JUNCTION TEMPERATURE**






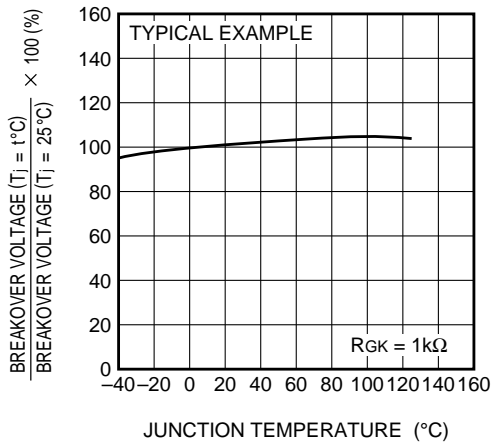


**BREAKOVER VOLTAGE VS.
GATE TO CATHODE RESISTANCE**

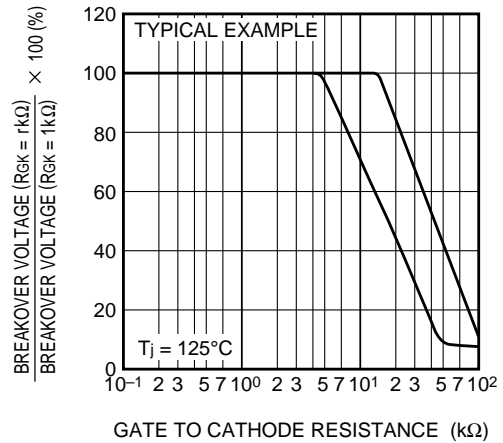

CR04AM

LOW POWER USE
GLASS PASSIVATION TYPE

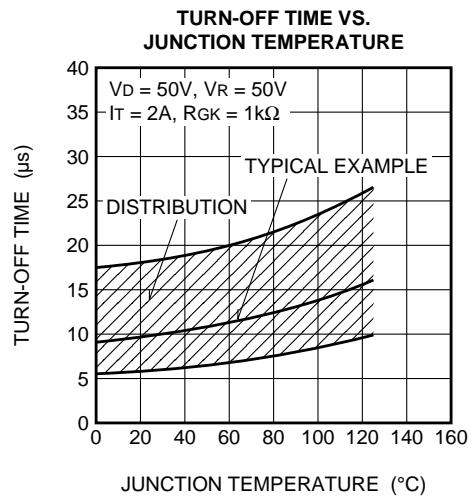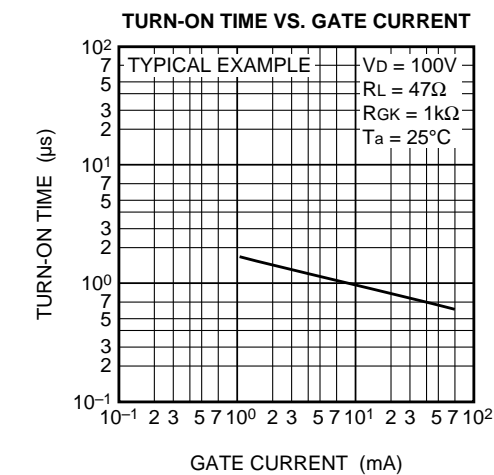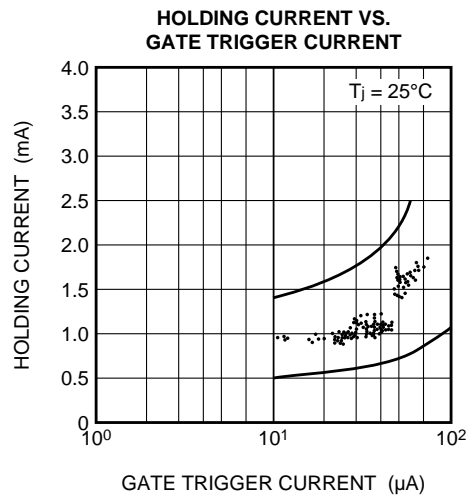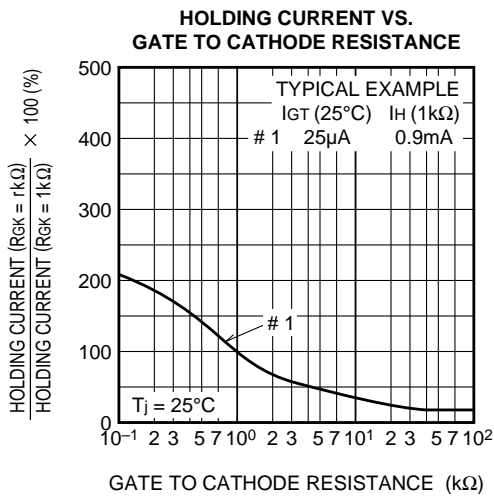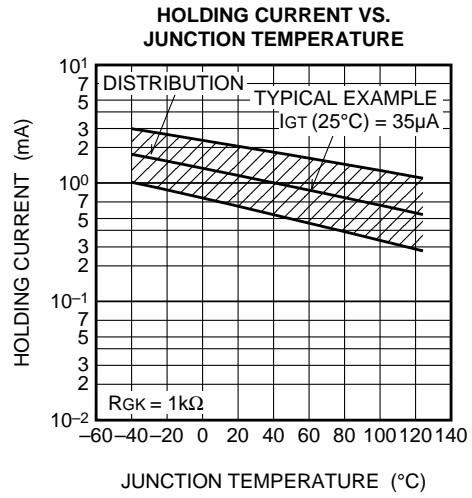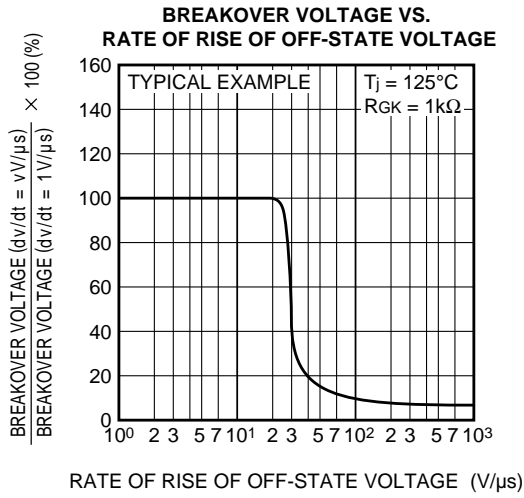

CR04AM

LOW POWER USE
GLASS PASSIVATION TYPE

