


International IOR Rectifier

BAT54WS

SCHOTTKY DIODE

0.2 Amp



Major Ratings and Characteristics

Characteristics	Value	Units
I_F (DC)	0.2	A
V_{RRM}	30	V
I_{FSM} @ $t_p = 10$ ms sine	1.0	A
V_F @ 30mA DC, $T_J = 25^\circ\text{C}$	0.5	V
P_d Power Dissipation @ $T_A = 25^\circ\text{C}$	200	mW
T_J range	- 65 to 150	$^\circ\text{C}$


Description/ Features

This Schottky barrier diode is designed for high speed switching application, voltage clamping and circuit protection. Miniature surface mount packages with reduced foot print are excellent for portable application where space is limited

- Small foot print, surface mountable
- Very low forward voltage drop
- Extremely fast switching speed for high frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Case Styles

Device Marking: IRWS

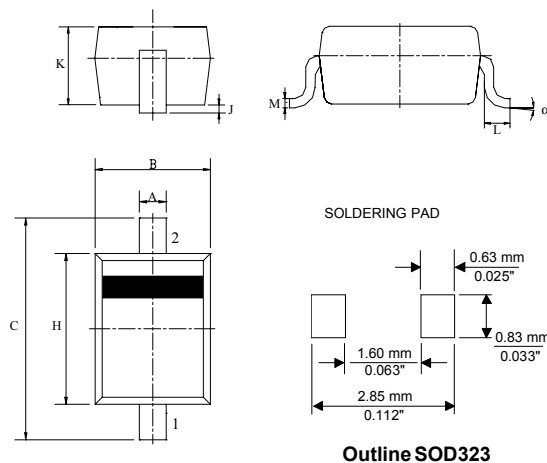

DIM	Millimeters		Inches	
	Min	Max	Min	Max
A	0.25	0.35	0.010	0.014
B	1.20	1.40	0.047	0.055
C	2.30	2.70	0.091	0.106
H	1.60	1.80	0.063	0.071
J	-	0.10	-	0.004
K	1.10	1.35	0.043	0.053
L	0.20	0.40	0.008	0.016
M	0.10	0.15	0.004	0.006
α	8°		8°	



Outline SOD323

BAT54WS

Preliminary Data Sheet PD-20633 12/01



Voltage Ratings

Part number	Value
V _R Max. DC Reverse Voltage (V)	30
V _{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	Value	Units	Conditions
I _F Forward Current	0.2	A	DC
I _{FSM} Max. Peak One Cycle Non-Repetitive Surge Current, @T _J =25°C	8.4	A	5μs Sine or 3μs Rect. pulse
	1.0	A	10ms Sine or 6ms Rect. pulse

Following any rated load condition and with rated V_{RRM} applied

Electrical Specifications

Parameters	Value	Units	Conditions
V _{FM} Max. Forward Voltage Drop (1)	0.24	V	@ 0.1mA
	0.32	V	@ 1mA
V _{FM} Max. Forward Voltage Drop (1)	0.40	V	@ 10mA
	0.50	V	@ 30mA
	0.65	V	@ 100mA
I _{RM} Max. Reverse Leakage Current (1)	2	μA	@ V _R = 25 V
	3	μA	@ V _R = 30 V
C _T Max. Junction Capacitance	10	pF	V _R = 1V _{DC} (test signal range 100KHz to 1Mhz), T _J = 25°C
dv/dt Max. Voltage Rate of Change (Rated V _R)	10000	V/μs	

T_J = 25°C

(1) Pulse Width < 300μs, Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	Value	Units	Conditions
T _J Max. Junction Temperature Range(*)	-65 to 150	°C	
T _{stg} Max. Storage Temperature Range	-65 to 150	°C	
R _{th(j-a)} Max. Thermal Resistance Junction to Ambient	635	°C/W	Mounted on PC board FR4 with minimum pad size
Wt Approximate Weight	0.004	gr	
Case Style	SOD323		
Device Marking	IRWS		

(*) $\frac{dP_{tot}}{dT_J} < \frac{1}{R_{th(j-a)}}$ thermal runaway condition for a diode on its own heatsink

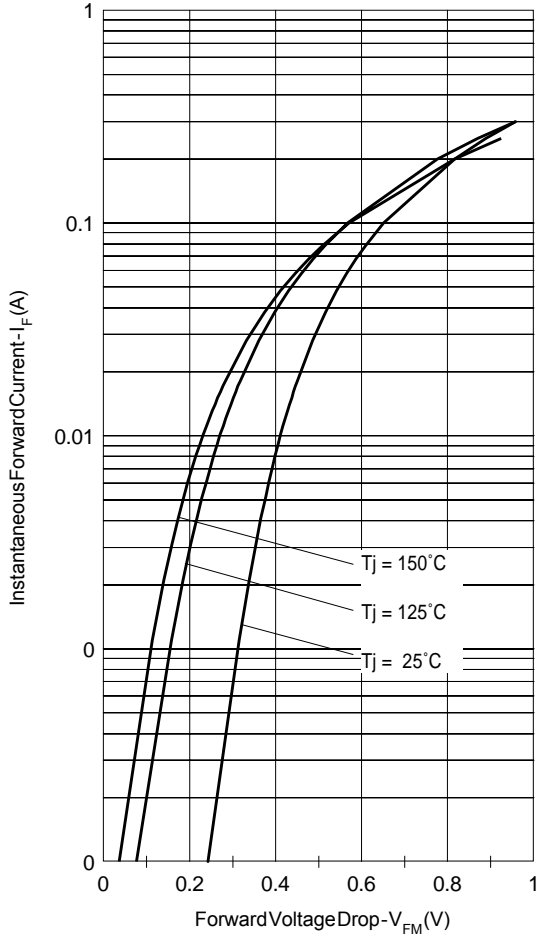


Fig. 1 - Max. Forward Voltage Drop Characteristics (PerLeg)

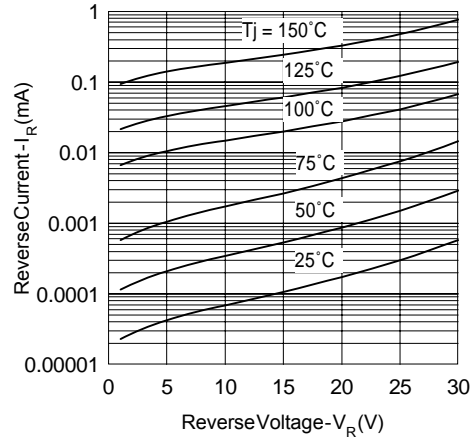


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (PerLeg)

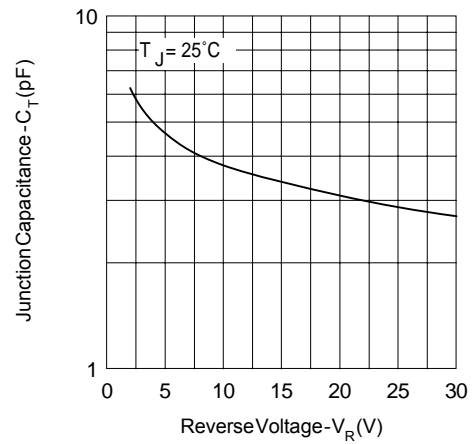


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (PerLeg)

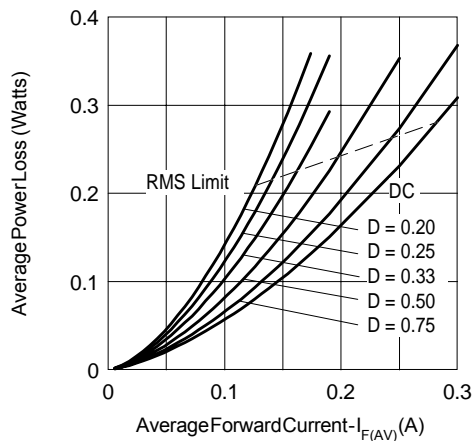


Fig. 4 - Forward Power Loss Characteristics

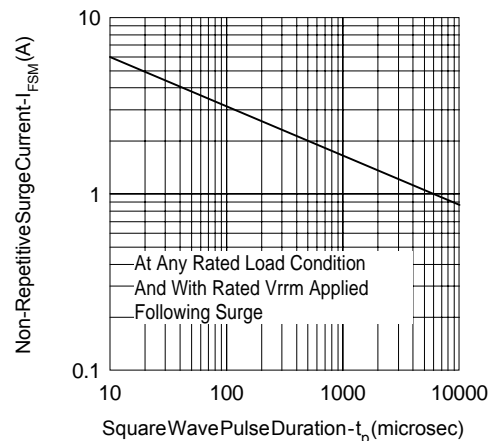



Fig. 5 - Max. Non-Repetitive Surge Current

BAT54WS

Preliminary Data Sheet PD-20633 12/01

International
IR Rectifier

Tape & Reel Information

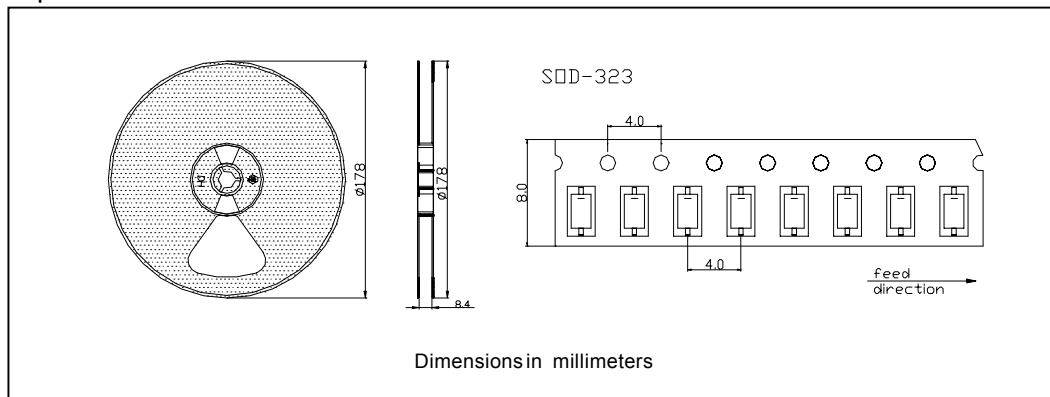

Ordering Information Table

Device	Package	Marking	Base qty	Delivery mode
BAT54WS	SOD-323	IRWS	3000	Tape & reel

Data and specifications subject to change without notice.
This product has been qualified and designed for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 11/01