



# BY127M, BY133, EM513

## PLASTIC SILICON RECTIFIERS

**VOLTAGE** 1250 to 1600 Volts **CURRENT** 1.0 Ampere

DO-41


Unit: inch(mm)

### FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Exceeds environmental standards of MIL-S-19500/228
- In compliance with EU RoHS 2002/95/EC directives

### MECHANICAL DATA

- Case: DO-41 Molded plastic
- Epoxy: UL 94V-O rate flame retardant.
- Lead: Axial leads, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any
- Weight: 0.012 ounces, 0.30 gram

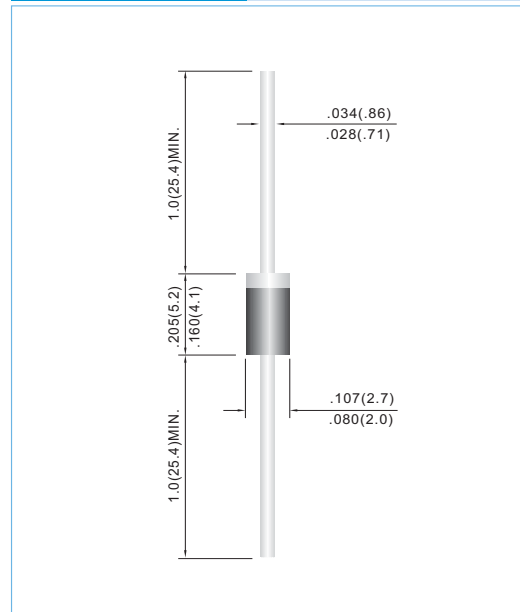

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

PARAMETER	SYMBOL	BY127M	BY133	EM513	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	1250	1300	1600	V
Maximum RMS Voltage	$V_{RMS}$	875	910	1120	V
Maximum DC Blocking Voltage	$V_{DC}$	1250	1300	1600	V
Maximum Average Forward Current .375" (9.5mm) lead length at $T_A=75^\circ\text{C}$	$I_{F(AV)}$	1.0			A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	30			A
Maximum Forward Voltage at 1.0A	$V_F$	1.1			V
Maximum DC Reverse Current at $T_J=25^\circ\text{C}$ Rated DC Blocking Voltage $T_J=100^\circ\text{C}$	$I_R$	5.0 500			$\mu\text{A}$
Typical Junction capacitance (Note 1)	$C_J$	15			pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$ $R_{\theta JL}$	50 25			$^\circ\text{C} / \text{W}$
Operating and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150			$^\circ\text{C}$


### NOTES:

1. Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
2. Thermal Resistance from Junction to Ambient and from junction to lead at 0.375" (9.5mm) lead length P.C.B. mounted.




# BY127M, BY133, EM513


## RATING AND CHARACTERISTIC CURVES

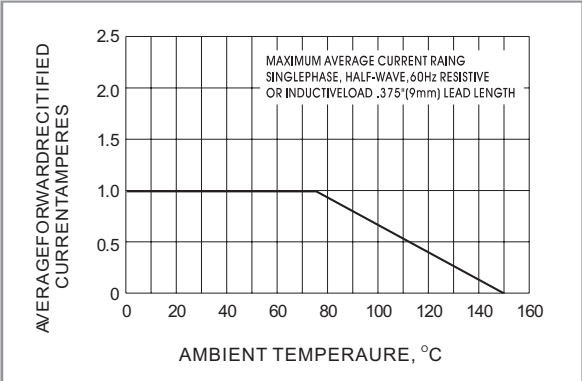


**Fig.1- FORWARD CURRENT DERATING CURVE**

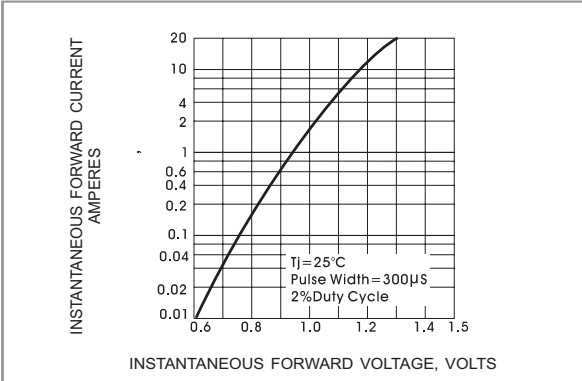


**Fig.2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC**

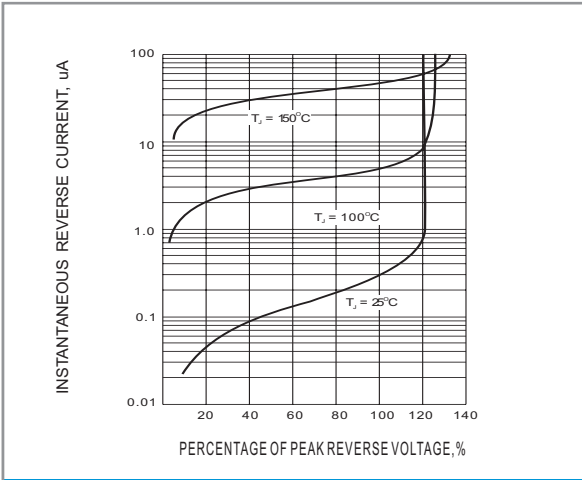

**Fig.3- TYPICAL REVERSE CHARACTERISTIC**

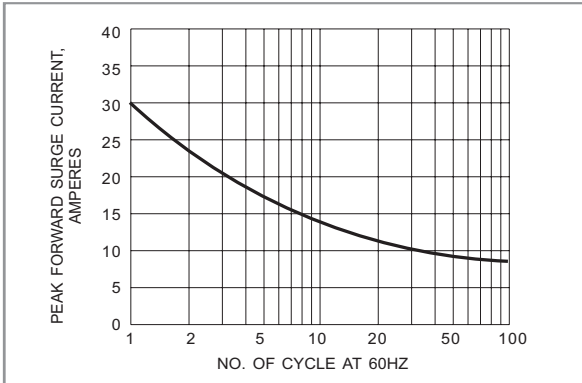

**Fig.4- MAXIMUM NON - REPETITIVE SURGE CURRENT**

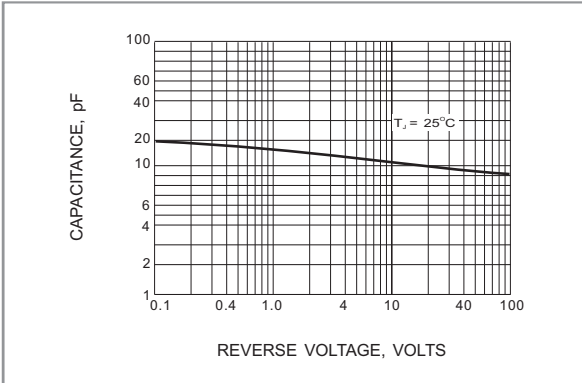

**Fig.5- TYPICAL JUNCTION CAPACITANCE**

### LEGAL STATEMENT

**Copyright PanJit International, Inc 2007**

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.