




# 557-283 D-Subminiature Lightweight Solid EMI/RFI Banding Backshell

557 T 283 M 3 B-06 B

Basic Part No. ————  
 Cable Entry Style ————  
     T = Top Entry  
     E = End Entry  
     S = Side Entry  
 Basic Part No. ————  
 Finish Symbol (Page 3) ————

————— B = Band Supplied (600-057), Omit for None  
 ———— Entry Size (Table II)  
 ———— Jackscrew Style  
     A = Male Socket Head Screw With Clip  
     B = Male Screw With Clip  
     H = Hex Head Jackscrew With Clip  
 ———— Shell Size (Table I)

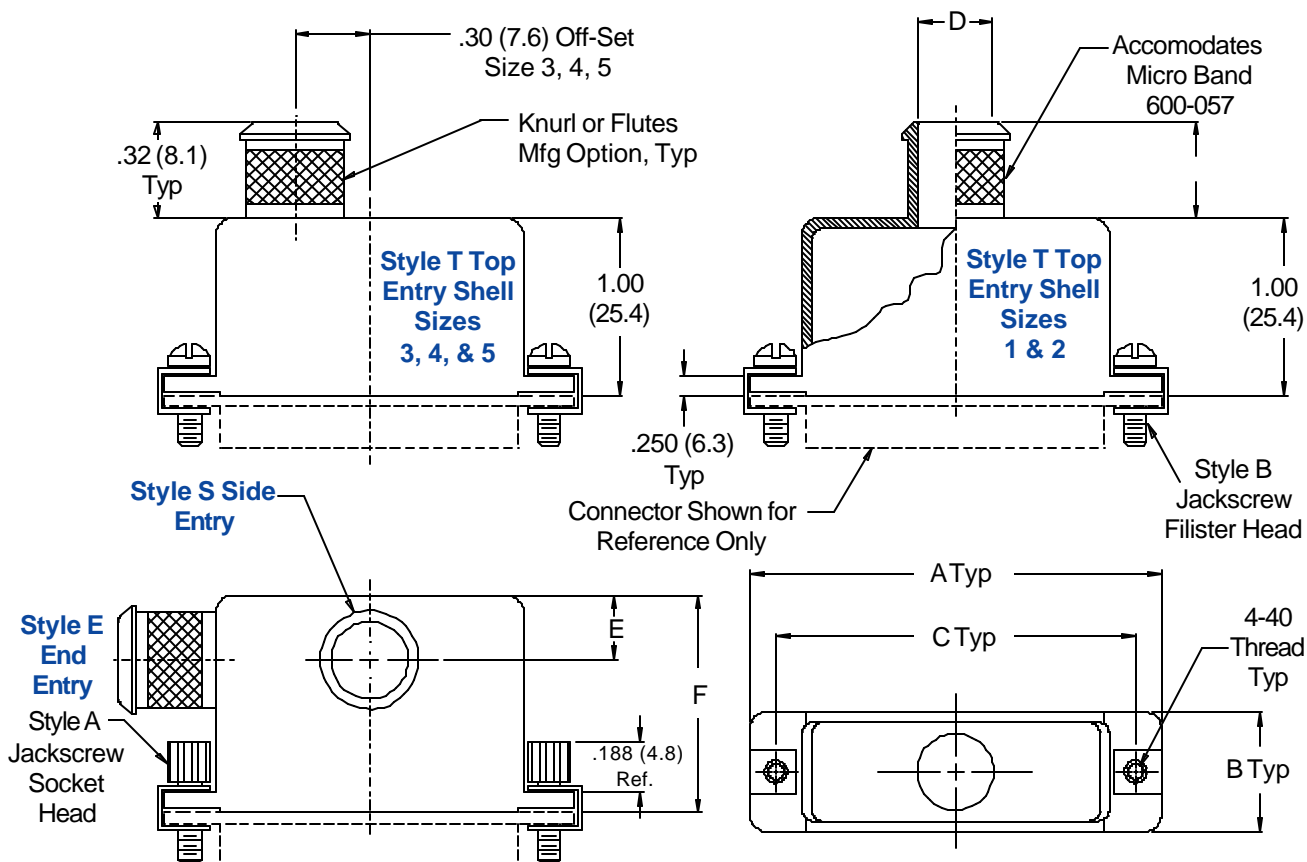

**TABLE I: SHELL SIZE & CONNECTOR INTERFACE**

Shell Size	A Max	B	C	
			±.005	(.1)
1	1.25 (31.8)	.530 (13.5)	.984	(25.0)
2	1.58 (40.1)	.530 (13.5)	1.312	(33.3)
3	2.13 (54.1)	.530 (13.5)	1.852	(47.0)
4	2.77 (70.4)	.530 (13.5)	2.500	(63.5)
5	2.68 (68.1)	.660 (16.8)	2.406	(61.1)

**TABLE II: CABLE ENTRY & BACKSHELL DIMS**

Entry Size	D	E	F	
04	.250 (6.4)	.250 (6.4)	1.25	(31.8)
05	.312 (7.9)	.281 (7.1)	1.38	(35.1)
06	.375 (9.5)	.312 (7.9)	1.38	(35.1)
07	.437 (11.1)	.344 (8.7)	1.50	(38.1)
08*	.500 (12.7)	.375 (9.5)	1.50	(38.1)

\* Available in shell size 5 only.

Metric dimensions (mm) are indicated in parentheses.