

AS85049/19 EMI/RFI Non-Environmental Backshells



EMI/RFI
Non-Env.
Backshells

**Glenair Connector
Designator H**

**MIL-DTL-38999
Series III & IV,
EN3645**

M85049/19 11 W 03 A

Basic Part No. ————
Shell Size ————
Finish ————

Length Code (Omit for Standard)
Clamp Size

N = Electroless Nickel
W = 1,000 Hour Cadmium Olive Drab
Over Electroless Nickel

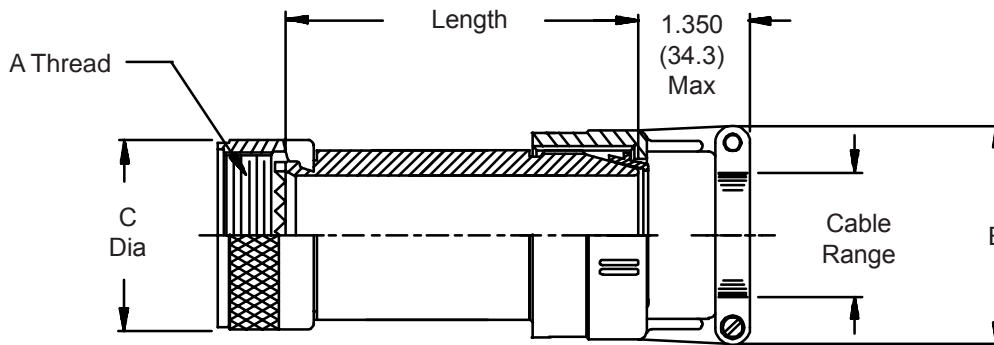


TABLE I				
Shell Size	Clamp Size (Table II)		A Thread Class 2B	C Dia Max
	Min	Max		
9	01	02	M12 X 1 - 6H	.75 (19.1)
11	01	03	M15 X 1 - 6H	.85 (21.6)
13	02	04	M18 X 1 - 6H	1.00 (25.4)
15	02	05	M22 X 1 - 6H	1.10 (27.9)
17	02	06	M25 X 1 - 6H	1.25 (31.8)
19	03	07	M28 X 1 - 6H	1.40 (35.6)
21	03	08	M31 X 1 - 6H	1.50 (38.1)
23	03	09	M34 X 1 - 6H	1.65 (41.9)
25	04	10	M37 X 1 - 6H	1.70 (43.2)

TABLE II				
Clamp Size	Cable Range		E Max	
	Min	Max		
01	.062 (1.6)	.125 (3.2)	.80 (20.3)	
02	.125 (3.2)	.250 (6.4)	1.00 (25.4)	
03	.250 (6.4)	.375 (9.5)	1.10 (27.9)	
04	.312 (7.9)	.500 (12.7)	1.20 (30.5)	
05	.437 (11.1)	.625 (15.9)	1.25 (31.8)	
06	.562 (14.3)	.750 (19.1)	1.40 (35.6)	
07	.687 (17.4)	.875 (22.2)	1.50 (38.1)	
08	.812 (20.6)	1.000 (25.4)	1.65 (41.9)	
09	.937 (23.8)	1.125 (28.6)	1.75 (44.5)	
10	1.062 (27.0)	1.250 (31.8)	1.90 (48.3)	

1. For complete dimensions see applicable Military Specification.
2. Metric dimensions (mm) are indicated in parentheses.
3. Cable range is defined as the accommodation range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.

TABLE III		
Length Code	Available Shell Sizes	Length
Std.	9 - 25	1,500 (38.1)
A	9 - 25	2,500 (63.5)
B	15 - 25	3,500 (88.9)
C	21 - 25	4,500 (114.3)