

SUPER FAST RECTIFIERS

REVERSE VOLTAGE - 50 to 600Volts
FORWARD CURRENT - 8.0 Amperes


FEATURES

- Super fast switching time for high efficiency
- Low forward voltage drop
High current capability
- Low reverse leakage current
- Plastic material has UL flammability classification 94V-0

MECHANICAL DATA

- Case: ITO-220AC molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Mounting position :Any
- Weight: 2.24 grams

ITO-220AC

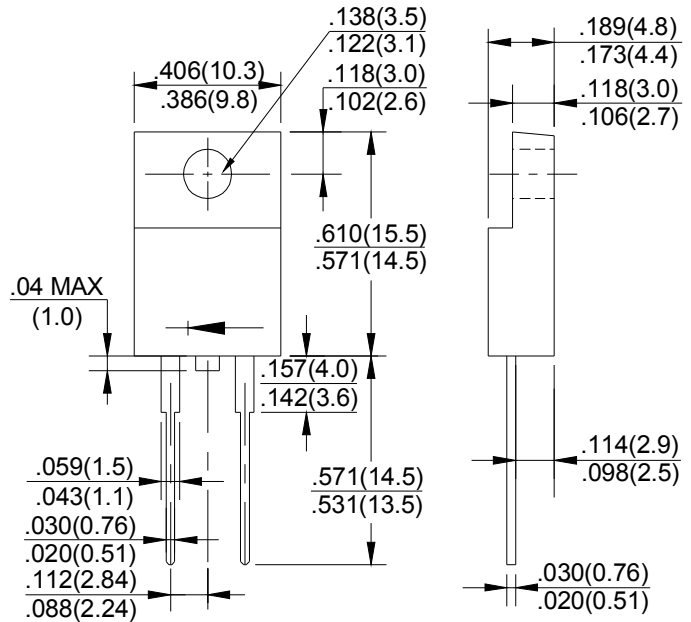

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	SFF801	SFF802	SFF803	SFF804	SFF805	SFF806	SFF808	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	600	V
Maximum RMS Voltage	V _{RMS}	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	600	V
Maximum Average Forward Rectified Current @T _A =75 °C	I(AV)	8.0							A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	I _{FSM}	300							A
Peak Instantaneous Forward Voltage at 8.0A DC	V _F	1.0			1.25		1.3		V
Maximum DC Reverse Current at Rated DC Blocking Voltage @T _J =25°C	I _R	10							μA
		150							
Maximum Reverse Recovery Time(Note1)	T _{RR}	35			40		50		nS
Typical Junction Capacitance (Note2)	C _J	40							pF
Typical Thermal Resistance (Note3)	R _{θJA}	5							°C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to + 150							°C

NOTES:1.Measured with I_F=0.5A,I_R=1A,I_{RR}=0.25A

2.Measured at 1.0 MHZ and applied reverse voltage of 4.0V DC.

3.Thermal resistance junction to ambient

FIG.1- TYPICAL FORWARD CURRENT DERATING CURVE

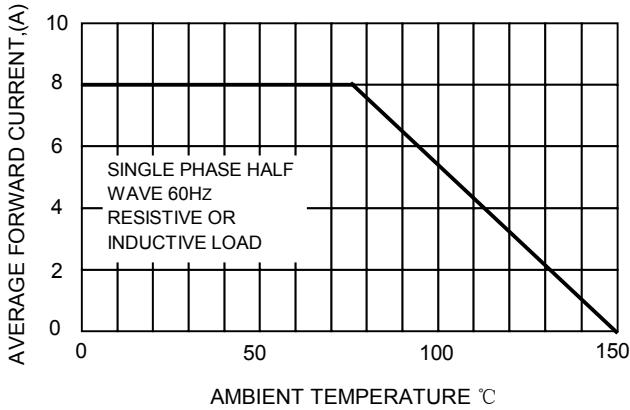


FIG.2-TYPICAL REVERSE CHARACTERISTICS

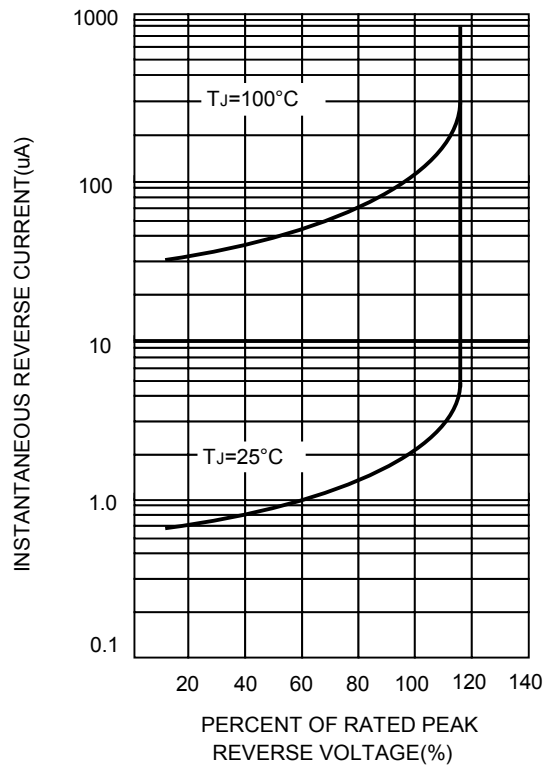


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

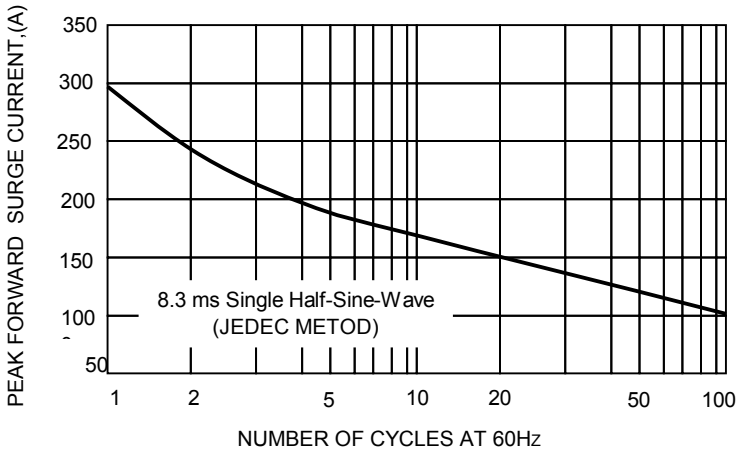


FIG.4-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

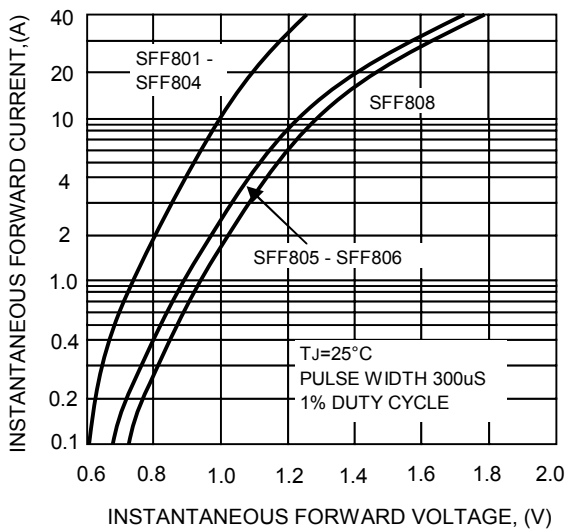


FIG.5-TYPICAL JUNCTION CAPACITANCE

