



1. CONFIGURATION & DIMENSIONS :

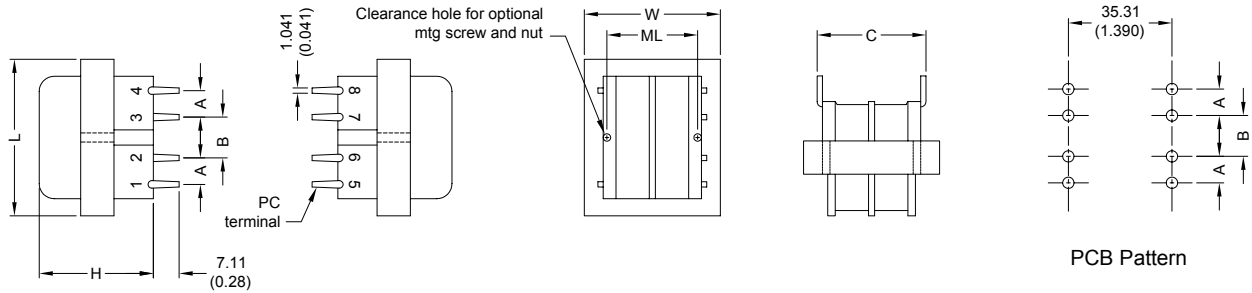

UNIT : mm (inch)

SIZE	VA	L	W	H	ML	A	B	C	Optional mtg. screw & nut*	gram
5	12	48.50 (1.91)	40.30 (1.59)	36.80 (1.45)	31.75 (1.250)	7.62 (.300)	10.16 (.400)	35.81 (1.410)	101.6-1016.0 x 34.93 (4-40 x 1.375)	317.5

2. SCHEMATIC :



3. ELECTRICAL CHARACTERISTICS (@ 25°C) :

- | | |
|--------------------------------------|------------------------------|
| a. Primary Voltage | AC 115/230 V 50/60 Hz . |
| b. No Load Primary Current | Less Than 20mA . |
| Input AC 115V 60Hz . | Less Than 25mA . |
| Input AC 230V 50Hz . | Series AC 14.60V . |
| c. Secondary Voltage (±5%) | Parallel AC 7.30V . |
| d. Secondary Load Current | Series 1.0A . |
| | Parallel 2.0A . |
| e. Full Load Primary Current | Less Than 75mA . |
| Input AC 115V 60Hz . | Less Than 145mA . |
| Input AC 230V 50Hz . | Series 12.60V . |
| f. Full Load Secondary Voltage (±5%) | Parallel 6.30V . |
| g. DC Resistance | Primary = 112.70 Ohm . |
| Pin 1-2 | = 134.50 Ohm . |
| Pin 3-4 | Secondary = - Ohm . |
| Pin 5-6 | = - Ohm . |
| Pin 7-8 | DC 500V 100Meg Ohm Of More . |
| h. Insulation Resistance | AC 2500V 60Hz 1 Minutes . |
| i. Withstand Voltage (Hi-Pot) | Less Than 60 Deg C . |
| j. Temperature Rise | EI-48 x 20.00 m/m . |
| k. Core Size | |



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD