

US1A THRU US1K

ULTRAFAST RECTIFIER

VOLTAGE: 50-800V

CURRENT: 1.0A


FEATURES

- Low power loss, high efficiency
- Low leakage
- Low forward voltage
- High current capability
- High speed switching
- High surge capability
- High reliability

MECHANICAL DATA

- **Case:** Molded plastic
- **Epoxy:** UL94V-0 rate flame retardant
- **Lead:** MIL-STD- 202E, Method 208 guaranteed
- **Polarity:** Color band denotes cathode end
- **Mounting position:** Any
- **Weight:** 0.064 grams

SMA (DO-214AC)

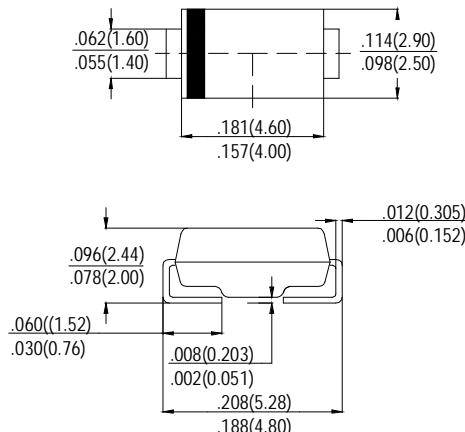

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRONICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	SYMBOL	US1A	US1B	US1D	US1G	US1J	US1K	units				
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	V				
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	V				
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	V				
Maximum Average Forward rectified Current at T _A =50°C	I_o	1.0						A				
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30						A				
Maximum Instantaneous forward Voltage at 1.0A DC	V_F	1.0		1.3		1.7		V				
Maximum DC Reverse Current at Rated DC Blocking Voltage T _A =25°C	I_R	5.0						μA				
Maximum Full Load Reverse Current Full Cycle Average,.375"(9.5mm) lead length at T _L =75°C		100										
Maximum Reverse Recovery Time (Note 1)	t_{rr}	50			75		nS					
Typical Junction Capacitance (Note 2)	C_J	15			12		pF					

Notes: 1.Test Conditions: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A

2.Measured at 1MHz and applied reverse voltage of 4.0 volts