
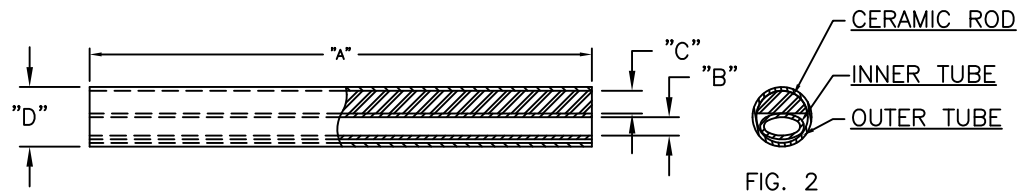


PART NO.	NOMINAL SLEEVE LENGTH "A" REF.	INNER TUBE DIAMETER MIN. "B"	NOMINAL ROD DIAMETER "C"	RECOVERED DIAMETER "D" REF.	FIGURE NO.
*OFSP-10-23	.91 (23.0)	.06 (1.5)	.04 (1.0)	.098 (2.5)	1
*OFSP-10-25	.98 (25.0)				
*OFSP-10-30	1.18 (30.0)				
*OFSP-10-35	1.38 (35.0)				
*OFSP-10-40	1.57 (40.0)				
*OFSP-10-45	1.77 (45.0)				
*OFSP-10-61	2.40 (61.0)	.06 (1.5)	.06 (1.5)	.11 (2.8)	
*OFSP-15-40	1.57 (40.0)				
*OFSP-15-61	2.40 (61.0)	.02 (0.5)	.03 (0.8)	.06 (1.6)	
OFSP-08-25	.98 (25.0)				
OFSP-08-40	1.57 (40.0)	.14 X .04 (3.6 X 1.0)	.16 X .07 (4.0 X 1.8)	.20 X .12 (5.0 X 3.0)	2
**ROFSP-40-40	1.57 (40.0)				

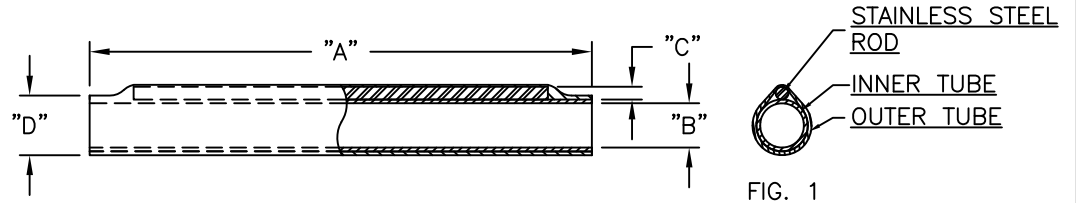

- NOTE:
- MATERIAL:  
OUTER TUBE: HEATSHRINK 3:1 RATIO CROSS-LINKED MODIFIED POLYOLEFIN (RMS-225).  
INNER TUBE: MODIFIED PE COPOLYMER ADHESIVE (RMS-226).  
ROD: STAINLESS SPRING STEEL (RMS-227).  
COLOR: CLEAR.
  - \*BLACK (BLK), BROWN (BRN), GREEN (GRN), BLUE (BLU), LIGHT BLUE (LBL), YELLOW (YEL), RED (RED), PINK (PNK), ORANGE (ORG), VIOLET (VIO), GRAY (GRY) AND WHITE (WHT), AVAILABLE BY SPECIAL ORDER ONLY.  
TO ORDER, ADD COLOR SUFFIX TO PART NO.
  - \*\*MATERIAL:  
OUTER TUBE: HEATSHRINK 3:1 RATIO CROSS-LINKED MODIFIED POLYOLEFIN (RMS-225).  
INNER TUBE: MODIFIED PE COPOLYMER ADHESIVE (RMS-226).  
ROD: CERAMIC (RMS-170).  
COLOR: CLEAR.

TITLE: OPTICAL FIBER SPLICE PROTECTOR				DWG IN IN (MM)		FINAL			
E	SEE CO 200469 FOR CHANGES	SK 11.20.09	FILE # OFSP		DWN: S.M.	APP:		PART #	
D	SEE ECN #1319 FOR CHANGES	SK 04.19.07	MAT'L: SEE NOTES		DT: 05/02/02	DT:		SEE TABLE	
C	FILE NO. WAS (R)OFSP	SM 05.14.02	RE: RICHCO, INC.		RICHCO INC.		PRINT TYPE		
B	CORRECTED PART NOS. FROM "-12" TO "-10"	SM 05.09.02			PO BOX 804238, CHICAGO, 60680		CA		
A	COMPLETELY REDRAWN AND ADDED NEW PART NO.'S	SM 05.02.02			(773) 539-4060				
REV	DESCRIPTION	ENGR DATE							