


T-57-11

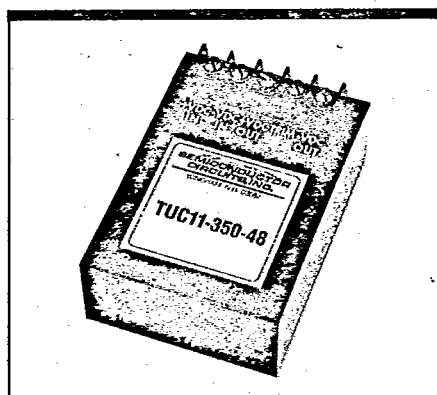


Sizes: 2.5 x 3.0 x 0.83 inches CASE 13
 2.5 x 3.0 x 1.25 inches CASE 8B
 2.5 x 3.5 x 1.25 inches CASE 9A

18 Watt Single Output

TA/TUM/TUC Series

- Regulated outputs
- Remote shutdown
- Continuous short circuit protection
- MOSFET Design
- 500 VDC I/O isolation
- 200 kHz switching frequency

Input Voltage Range VDC	Output Voltage	Output Current	Regulation %		Case	Model Number
			Line ±	Load ±		
9 - 36	5 VDC	3.5 A	0.5	1.0	13	TA11-350-18
					8B	TUC11-350-18
					9A	TUM11-350-18
20 - 72	5 VDC	3.5 A			13	TA11-350-48
					8B	TUC11-350-48
					9A	TUM11-350-48
9 - 36	12 VDC	1.5 A			13	TA12-150-18
					8B	TUC12-150-18
					9A	TUM12-150-18
20 - 72	12 VDC	1.5 A			13	TA12-150-48
					8B	TUC12-150-48
					9A	TUM12-150-48
9 - 36	15 VDC	1.2 A			13	TA13-120-18
					8B	TUC13-120-18
					9A	TUM13-120-18
20 - 72	15 VDC	1.2 A			13	TA13-120-48
					8B	TUC13-120-48
					9A	TUM13-120-48

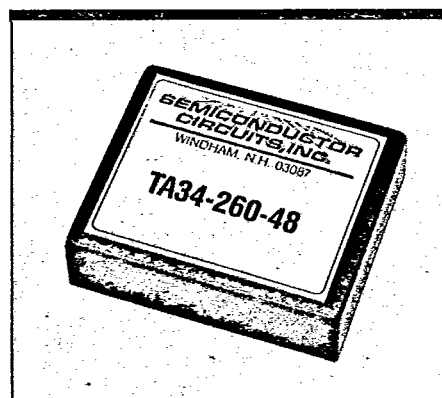

Size: 2.5 x 3.0 x 0.83 inches

18 Watt Dual and Triple Output

TA Series

- Regulated outputs
- Six-sided shielding
- Continuous short circuit protection
- Remote shutdown
- 500 VDC I/O isolation

Input Voltage Range VDC	Output Voltage	Output Current	Regulation % Line ± Load ±		Case	Model Number
9 - 36 20 - 72	±12 VDC ±12 VDC	±750 mA ±750 mA	0.5	1.0	10B	TA22-150-18 TA22-150-48
9 - 36 20 - 72	±15 VDC ±15 VDC	±600 mA ±600 mA				TA23-120-18 TA23-120-48
9 - 36 20 - 72	+5/±12 VDC +5/±12 VDC	2.0 A ±310 mA 2.0 A ±310 mA	0.5/3.0	0.5/3.0		TA34-260-18 TA34-260-48
9 - 36 20 - 72	+5/±15 VDC +5/±15 VDC	2.0 A ±260 mA 2.0 A ±260 mA				TA35-250-18 TA35-250-48



Size: 2.5 x 3.0 x 0.4 inches (Case 10A)
 2.5 x 3.0 x .83 inches (Case 10B)

15 to 25 Watt Single Output


BA Series

- Regulated outputs
- Six-sided shielding
- Low profile package
- Efficiency to 85%
- Non isolated


Input Voltage Range VDC	Output Voltage	Output Current	Regulation %		Case	Model Number
			Line ±	Load ±		
9 - 36	5 VDC	3.0 A	±0.5	±0.5	10A	BA11-300-18
9 - 36	5 VDC	5.0 A			10B	BA11-500-18
16 - 36	12 VDC	2.0 A			10A	BA12-200-18
18 - 36	15 VDC	1.5 A			10A	BA13-150-18

Case Dimensions


T-90-20




Case 1




Case 6

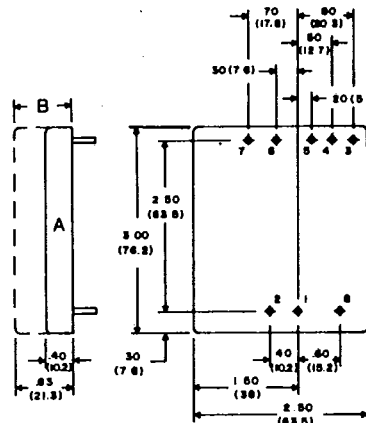


Case 10

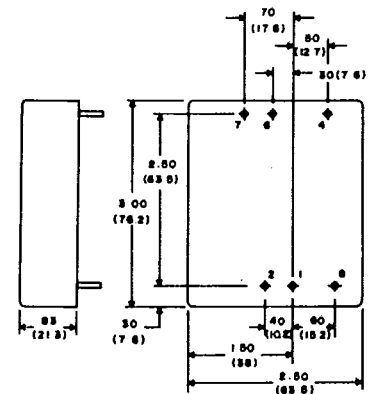


Case 13




Case 2




Case 7

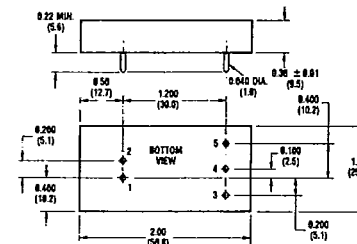


Case 11-1




Case 14

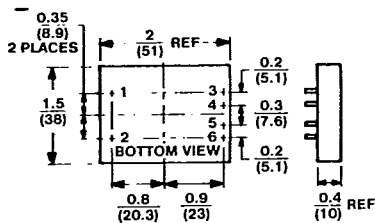


Case 3




Case 8

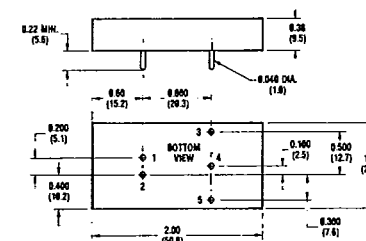


Case 11-2




Case 15

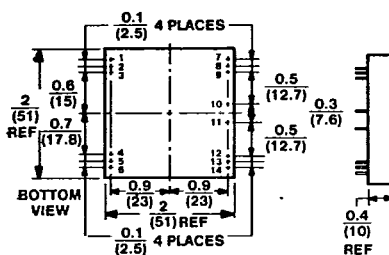


Case 4




Case 8




Case 5



Case 9



Case 12



12