

VIP-3/SC/HD44SUB/F


Order No.: 2322427

The illustration shows a 44-position version with female insert



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2322427>

VARIOFACE module, with screw connection and high density D-Subminiature female connector, for mounting on NS 32 or NS 35/7.5, no. of pos.: 44, width: 135 mm



Commercial data	
GTIN (EAN)	4046356451727
sales group	I501
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.2194 KG
Catalog page information	Page 289 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
06/03/2009



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data	
Nominal voltage U_N	125 V
Max. current carrying capacity per branch	1 A
Number of positions	44
Width	82.9 mm

Height	69 mm
Depth	62 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any

Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Number of positions	26
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	D-SUB connection
Type of connection	Pluggable

Certificates / Approvals



Certification CUL, UL

CUL


Nominal voltage U_N	125 V
Nominal current I_N	1 A
AWG/kcmil	30-12

UL


Nominal voltage U_N	125 V
Nominal current I_N	1 A
AWG/kcmil	30-12

Diagrams/Drawings

Circuit diagram

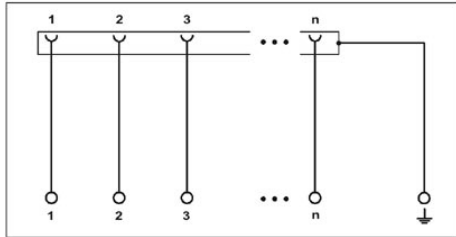

Schematic diagram

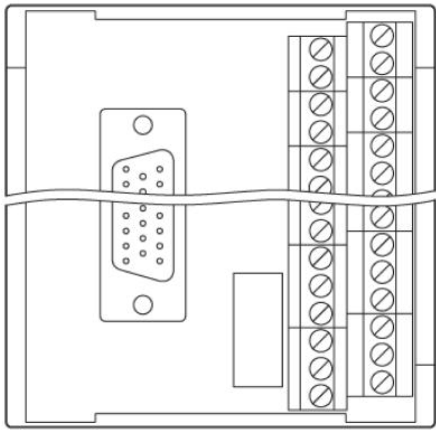

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;