


Features

- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- High Surge Capability
- High Current Capability and Low Forward Voltage Drop
- Surge Overload Rating to 80A Peak
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications
- **Lead Free Finish, RoHS Compliant (Note 4)**
- **IEC 61000-4-2 (ESD - 150pF/330Ω)**
Air discharge - ±15kV
Contact - ±15kV

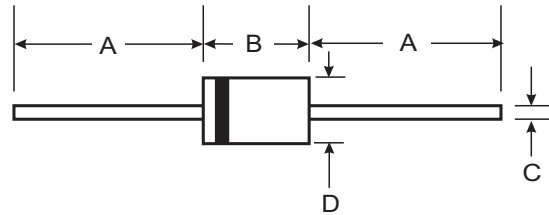

DO-201AD		
Dim	Min	Max
A	25.40	—
B	7.20	9.50
C	1.20	1.30
D	4.80	5.30
All Dimensions in mm		

Mechanical Data


- Case: DO-201AD
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Finish - Tin. Solderable per MIL-STD-202, Method 208 (e3)
- Polarity: Cathode Band
- Marking: Type Number
- Weight: 1.1 grams (approximate)

Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified


Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristic	Symbol	SB320	SB330	SB340	SB350	SB360	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage (Note 2)	V _{RRM} V _{RWM} V _R	20	30	40	50	60	V
RMS Reverse Voltage	V _{R(RMS)}	14	21	28	35	42	V
Average Rectified Output Current (Note 1) (See Figure 1)	I _O	3.0					A
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	80					A
Forward Voltage @ I _F = 3.0A	V _{FM}	0.50			0.74		V
Peak Reverse Current (Note 2) @ T _A = 25°C @ T _A = 100°C	I _{RM}	0.5			10		mA
		20					
Typical Thermal Resistance (Note 3)	R _{θJA}	30					°C/W
	R _{θJL}	10					
Operating Temperature Range	T _j	-65 to +125			-65 to +150		°C
Storage Temperature Range	T _{STG}	-65 to +150					°C


- Notes:
1. Measured at ambient temperature at a distance of 9.5mm from the case.
 2. Short duration pulse test used to minimize self-heating effect.
 3. Thermal resistance from junction to lead vertical P.C.B. mounted, 0.500" (12.7mm) lead length with 2.5 x 2.5" (63.5 x 63.5mm) copper pad.
 4. RoHS revision 13.2.2003. High Temperature Solder Exemption Applied, see EU Directive Annex Note 7.

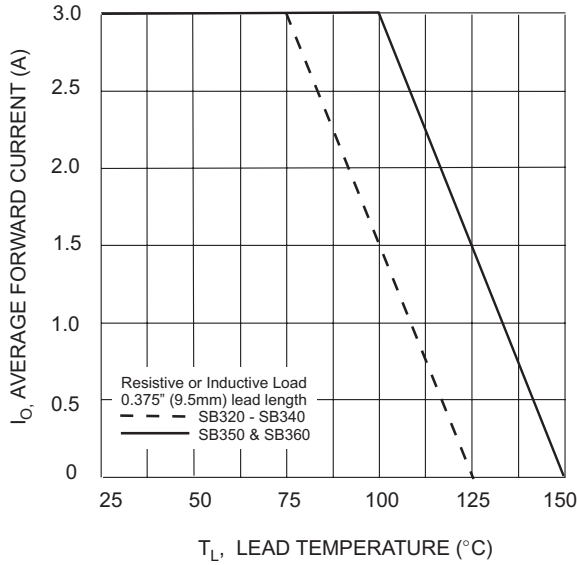


T_L , LEAD TEMPERATURE ($^{\circ}C$)
Fig. 1 Forward Current Derating Curve

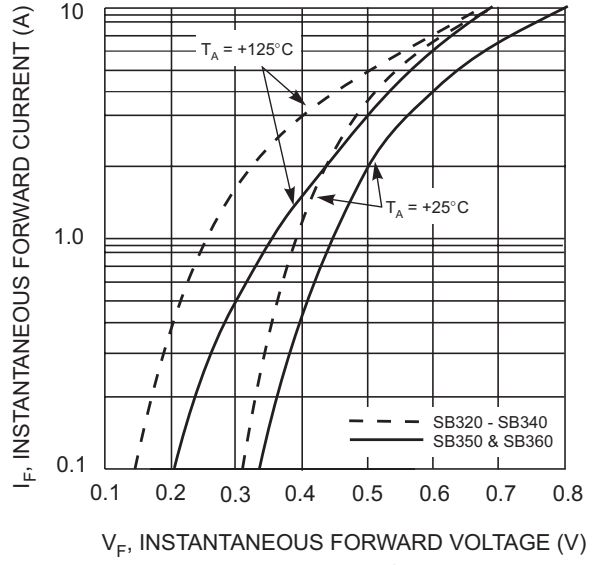


V_F , INSTANTANEOUS FORWARD VOLTAGE (V)
Fig. 2 Typical Forward Characteristics

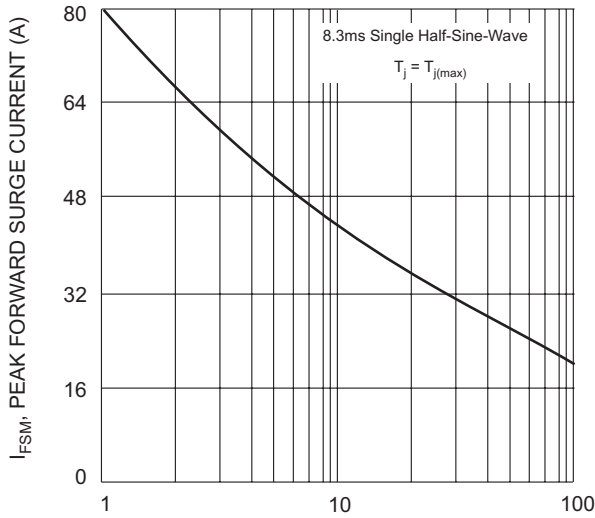

NUMBER OF CYCLES AT 60 Hz
Fig. 3 Max Non-Repetitive Peak Fwd Surge Current

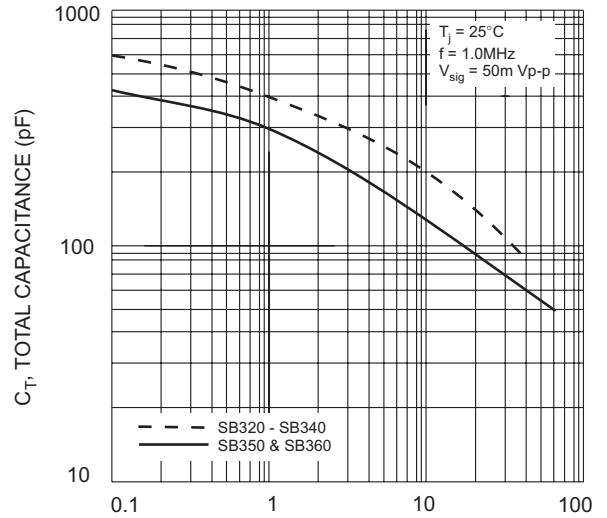

V_R , REVERSE VOLTAGE (V)
Fig. 4 Typical Total Capacitance

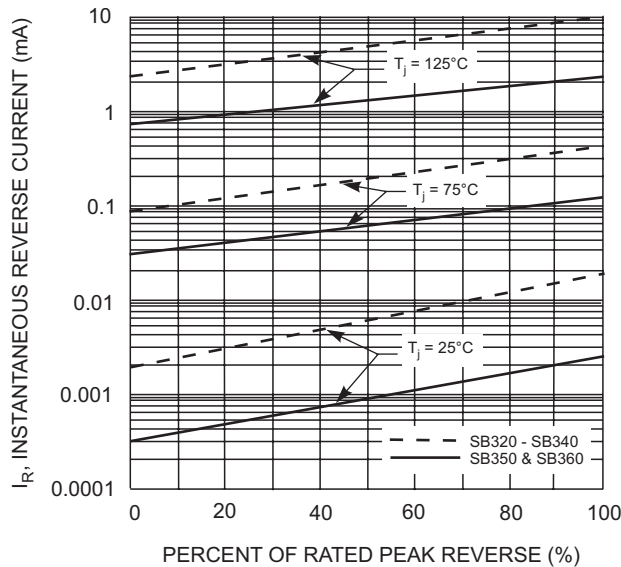

PERCENT OF RATED PEAK REVERSE (%)
Fig. 5 Typical Reverse Characteristics



Ordering Information (Note 5)

Device	Packaging	Shipping
SB320-B	DO-201AD	500/Bulk
SB330-B	DO-201AD	500/Bulk
SB340-B	DO-201AD	500/Bulk
SB350-B	DO-201AD	500/Bulk
SB360-B	DO-201AD	500/Bulk

Notes: 5. For packaging details, visit our website at <http://www.diodes.com/datasheets/ap02008.pdf>

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.