

REVISIONS																			
LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED																
A	Changes in accordance with NOR 5962-R199-93.	93-07-01	M. A. FRYE																
B	Add case outline X. Update thermal resistance in paragraph 1.3. Update boilerplate. Redrawn. -rrp	98-01-06	R. MONNIN																
C	Add table IIB. Remove vendor CAGE 27014 from source of supply for case outlines 2 and H. Add vendor CAGE 27014 to source of supply for device class V. -rrp	98-06-23	R. MONNIN																

REV																			
SHEET																			
REV																			
SHEET																			
REV STATUS	REV	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
OF SHEETS	SHEET	1	2	3	4	5	6	7	8	9	10	11	12	13	14				
PMIC N/A	PREPARED BY Rick C. Officer	DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216																	
STANDARD MICROCIRCUIT DRAWING THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE AMSC N/A	CHECKED BY Charles E. Besore																		
	APPROVED BY Michael A. Frye																		
	DRAWING APPROVAL DATE 93-01-12																		
	REVISION LEVEL C	SIZE A	CAGE CODE 67268	5962-92165															
		SHEET 1 OF 14																	

DSCC FORM 2233

APR 97

5962-E397-98


DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

 9004708 0036491 421

1. SCOPE

1.1 Scope. This drawing documents two product assurance class levels consisting of high reliability (device classes Q and M) and space application (device class V). A choice of case outlines and lead finishes are available and are reflected in the Part or Identifying Number (PIN). When available, a choice of Radiation Hardness Assurance (RHA) levels are reflected in the PIN.

1.2 PIN. The PIN is as shown in the following example:

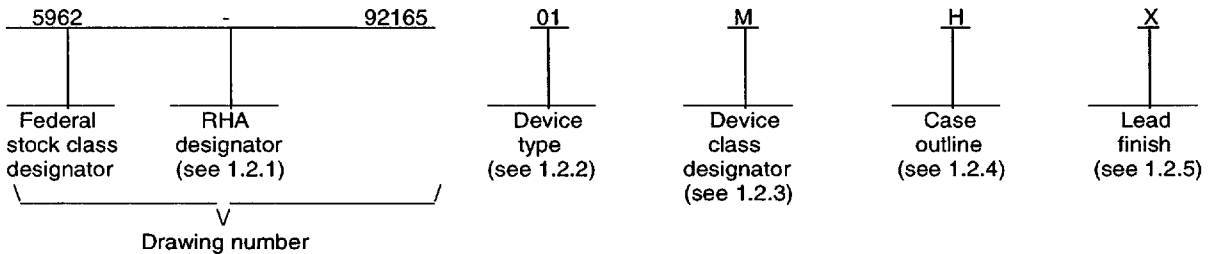

1.2.1 RHA designator. Device classes Q and V RHA marked devices meet the MIL-PRF-38535 specified RHA levels and are marked with the appropriate RHA designator. Device class M RHA marked devices meet the MIL-PRF-38535, appendix A specified RHA levels and are marked with the appropriate RHA designator. A dash (-) indicates a non-RHA device.

1.2.2 Device type(s). The device type(s) identify the circuit function as follows:

Device type	Generic number	Circuit function
01	LM6162	High speed operational amplifier

1.2.3 Device class designator. The device class designator is a single letter identifying the product assurance level as follows:

Device class	Device requirements documentation
M	Vendor self-certification to the requirements for MIL-STD-883 compliant, non-JAN class level B microcircuits in accordance with MIL-PRF-38535, appendix A
Q or V	Certification and qualification to MIL-PRF-38535

1.2.4 Case outline(s). The case outline(s) are as designated in MIL-STD-1835 and as follows:

Outline letter	Descriptive designator	Terminals	Package style
H	GDFP1-F10 or CDFP2-F10	10	Flat pack
P	GDIP1-T8 or CDIP2-T8	8	Dual-in-line
2	CQCC1-N20	20	Square leadless chip carrier
X	See figure 1	10	Flat pack

1.2.5 Lead finish. The lead finish is as specified in MIL-PRF-38535 for device classes Q and V or MIL-PRF-38535, appendix A for device class M.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-92165
		REVISION LEVEL C	SHEET 2

DSCC FORM 2234
APR 97

9004708 0036492 368

1.3 Absolute maximum ratings. 1/

Supply voltage (+V _S to -V _S)	36 V dc
Differential input voltage	±8 V dc 2/
Common mode voltage range	(+V _S -0.7 V dc) to (+V _S -0.3 V dc)
Output short circuit to GND	Continuous 3/
Operating supply voltage range	4.75 V dc to 32 V dc
Storage temperature range	-65°C to +150°C
Lead temperature (soldering, 10 seconds)	+260°C
Junction temperature (T _J)	+150°C
Power dissipation (P _D)	400 mW
Thermal resistance, junction-to-case (θ _{JC}):	
Cases H, P, and X	21°C/W
Case 2	20°C/W
Thermal resistance, junction-to-ambient (θ _{JA}):	
Case H and X	228°C/W (still air, board mount)
Case P	140°C/W (500 LFPM air flow mount)
Case 2	113°C/W (still air, board mount)
Case H	51°C/W (500 LFPM air flow mount)
Case P	90°C/W (still air, board mount)
Case 2	61°C/W (500 LFPM air flow mount)

1.4 Recommended operating conditions.

Positive supply voltage (+V _S)	+15 V dc
Negative supply voltage (-V _S)	-15 V dc
Phase margin	45°
Differential gain	0.1%
Differential phase	0.1°
Power bandwidth	4.5 MHz
Input noise voltage	10 nV/√Hz
Input noise current	1.2 pA/√Hz
Ambient operating temperature range (T _A)	-55°C to +125°C

2. APPLICABLE DOCUMENTS

2.1 Government specification, standards, and handbooks. The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

- 1/ Stresses above the absolute maximum rating may cause permanent damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.
- 2/ In order to achieve optimum ac performance, the input stage was designed without protective clamps. Exceeding the maximum differential input voltage results in reverse breakdown of the base-emitter junction of one of the input transistors and probable degradation of the input parameters (especially V_{IO} and I_{IO}).
- 3/ Continuous short-circuit operation at elevated ambient temperatures can result in exceeding the maximum allowed junction temperature of +150°C.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-92165
		REVISION LEVEL C	SHEET 3

DSCC FORM 2234
APR 97

9004708 0036493 2T4

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-38535 - Integrated Circuits, Manufacturing, General Specification for.

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-883 - Test Method Standard Microcircuits.
MIL-STD-973 - Configuration Management.
MIL-STD-1835 - Interface Standard For Microcircuit Case Outlines.

HANDBOOKS

DEPARTMENT OF DEFENSE

MIL-HDBK-103 - List of Standard Microcircuit Drawings (SMD's).
MIL-HDBK-780 - Standard Microcircuit Drawings.

(Unless otherwise indicated, copies of the specification, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Item requirements. The individual item requirements for device classes Q and V shall be in accordance with MIL-PRF-38535 and as specified herein or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein. The individual item requirements for device class M shall be in accordance with MIL-PRF-38535, appendix A for non-JAN class level B devices and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535 and herein for device classes Q and V or MIL-PRF-38535, appendix A and herein for device class M.

3.2.1 Case outline(s). The case outline(s) shall be in accordance with 1.2.4 herein and figure 1.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 2.

3.3 Electrical performance characteristics and postirradiation parameter limits. Unless otherwise specified herein, the electrical performance characteristics and postirradiation parameter limits are as specified in table I and shall apply over the full ambient operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are defined in table I.

3.5 Marking. The part shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's PIN may also be marked as listed in MIL-HDBK-103. For packages where marking of the entire SMD PIN number is not feasible due to space limitations, the manufacturer has the option of not marking the "5962-" on the device. For RHA product using this option, the RHA designator shall still be marked. Marking for device classes Q and V shall be in accordance with MIL-PRF-38535. Marking for device class M shall be in accordance with MIL-PRF-38535, appendix A.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-92165
		REVISION LEVEL C	SHEET 4

DSCC FORM 2234
APR 97

9004708 0036494 130

3.5.1 Certification/compliance mark. The certification mark for device classes Q and V shall be a "QML" or "Q" as required in MIL-PRF-38535. The compliance mark for device class M shall be a "C" as required in MIL-PRF-38535, appendix A.

3.6 Certificate of compliance. For device classes Q and V, a certificate of compliance shall be required from a QML-38535 listed manufacturer in order to supply to the requirements of this drawing (see 6.6.1 herein). For device class M, a certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-HDBK-103 (see 6.6.2 herein). The certificate of compliance submitted to DSCC-VA prior to listing as an approved source of supply for this drawing shall affirm that the manufacturer's product meets, for device classes Q and V, the requirements of MIL-PRF-38535 and herein or for device class M, the requirements of MIL-PRF-38535, appendix A and herein.

3.7 Certificate of conformance. A certificate of conformance as required for device classes Q and V in MIL-PRF-38535 or for device class M in MIL-PRF-38535, appendix A shall be provided with each lot of microcircuits delivered to this drawing.

3.8 Notification of change for device class M. For device class M, notification to DSCC-VA of change of product (see 6.2 herein) involving devices acquired to this drawing is required for any change as defined in MIL-STD-973.

3.9 Verification and review for device class M. For device class M, DSCC, DSCC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

3.10 Microcircuit group assignment for device class M. Device class M devices covered by this drawing shall be in microcircuit group number 49 (see MIL-PRF-38535, appendix A).

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. For device classes Q and V, sampling and inspection procedures shall be in accordance with MIL-PRF-38535 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein. For device class M, sampling and inspection procedures shall be in accordance with MIL-PRF-38535, appendix A.

4.2 Screening. For device classes Q and V, screening shall be in accordance with MIL-PRF-38535, and shall be conducted on all devices prior to qualification and technology conformance inspection. For device class M, screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection.

4.2.1 Additional criteria for device class M.

- a. Burn-in test, method 1015 of MIL-STD-883.
 - (1) Test condition A, B, C or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015.
 - (2) $T_A = +125^{\circ}\text{C}$, minimum.
- b. Interim and final electrical test parameters shall be as specified in table II herein.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-92165
		REVISION LEVEL C	SHEET 5

DSCC FORM 2234
APR 97

■ 9004708 0036495 077 ■

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions <u>1/</u> -55°C ≤ T _A ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits <u>2/</u>		Unit
					Min	Max	
Input offset voltage	V _{IO}		1	01	-5	+5	mV
			2, 3		-8	+8	
Input bias current	I _{IB}		1	01	-3	+3	μA
			2, 3		-6	+6	
Input offset current	I _{IO}		1	01	-350	+350	nA
			2, 3		-800	+800	
Common mode voltage range	+V _{CM}	V _S = ±15 V	1	01	13.9		V
			2, 3		13.8		
		+V _S = +5 V <u>3/</u>	1		3.9		
			2, 3		3.8		
	-V _{CM}	V _S = ±15 V	1			-12.9	
			2, 3			-12.7	
		+V _S = +5 V <u>3/</u>	1			1.8	
			2, 3			2.0	

See footnotes at end of table.

**STANDARD
MICROCIRCUIT DRAWING**
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 43216-5000

SIZE
A

REVISION LEVEL
C

5962-92165

SHEET
6

DSCC FORM 2234
APR 97

■ 9004708 0036496 T03 ■

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions <u>1/</u> -55°C ≤ T _A ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits <u>2/</u>		Unit
					Min	Max	
Common mode rejection ratio	CMRR	-12.9 V ≤ V _{CM} ≤ 13.9 V	1	01	83		dB
		-12.7 V ≤ V _{CM} ≤ 13.8 V	2, 3		79		
Power supply rejection ratio	PSRR	±10 V ≤ V _S ≤ ±16 V	1	01	83		dB
			2, 3		79		
Output voltage swing	+V _{OUT}	V _S = ±15 V, R _L = 2 kΩ	1	01	13.5		V
			2, 3		13.3		
		+V _S = ±5 V, R _L = 2 kΩ <u>3/</u>	1		3.5		
			2, 3		3.3		
	-V _{OUT}	V _S = ±15 V, R _L = 2 kΩ	1			-13.0	
			2, 3			-12.7	
		+V _S = ±5 V, R _L = 2 kΩ <u>3/</u>	1			1.7	
			2, 3			2.0	
Output short circuit current	I _{OS}	Source	1	01		-30	mA
			2, 3			-20	
		Sink	1		30		
			2, 3		20		
Total supply current	I _{CC}		1	01		6.5	mA
			2, 3			6.8	
Large signal voltage gain	A _{VOL}	V _{OUT} = ±10 V, R _L = 2 kΩ <u>4/</u>	4	01	1000		V/V
			5, 6		500		
Gain bandwidth product	GBW	f = 20 MHz	4	01	80		MHz
			5, 6		55		

See footnotes at end of table.

**STANDARD
MICROCIRCUIT DRAWING**
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 43216-5000

SIZE
A

REVISION LEVEL
C

5962-92165

SHEET
7

DSCC FORM 2234
APR 97

■ 9004708 0036497 94T ■

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions <u>1/</u> -55°C ≤ T _A ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits <u>2/</u>		Unit
					Min	Max	
Slew rate	+SR	Rising edge, V _{OUT} = -4 V to +4 V, A _V = +2, V _{IN} = 8 V step, measured at -4 V and +4 V points	4, 5, 6	01	200		V/μs
	-SR	Falling edge, V _{OUT} = +4 V to -4 V, A _V = +2, V _{IN} = 8 V step, measured at +4 V and -4 V points			200		
Settling time	t _s	10 V step at 0.1% of the fixed value, R _L = 2 kΩ, A _V = -1	9	01		300	ns
			10, 11			325	

1/ Unless otherwise specified, V_S = ±15 V, V_{CM} = 0 V, R_L ≥ 100 kΩ, and R_S ≥ 10 kΩ.

2/ The algebraic convention, whereby the most negative value is a minimum and the most positive is a maximum, is used in this table. Negative current shall be defined as conventional current flow out of a device terminal.

3/ For single supply operation, the following conditions apply: +V_S = 5 V, -V_S = 0 V, V_{OUT} = 2.5 V, and V_{CM} = 2.5 V. Each of the V_{OS}ADJUST pins are connected to -V_S to realize maximum output swing. This connection will increase the offset voltage.

4/ Voltage gain is the total output swing of 20 V that is divided by the signal required to produce that swing.

4.2.2 Additional criteria for device classes Q and V.

- a. The burn-in test duration, test condition and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document revision level control of the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015 of MIL-STD-883.
- b. Interim and final electrical test parameters shall be as specified in table II herein.
- c. Additional screening for device class V beyond the requirements of device class Q shall be as specified in MIL-PRF-38535, appendix B.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-92165
		REVISION LEVEL C	SHEET 8

DSCC FORM 2234
APR 97

■ 9004708 0036498 886 ■

Case X

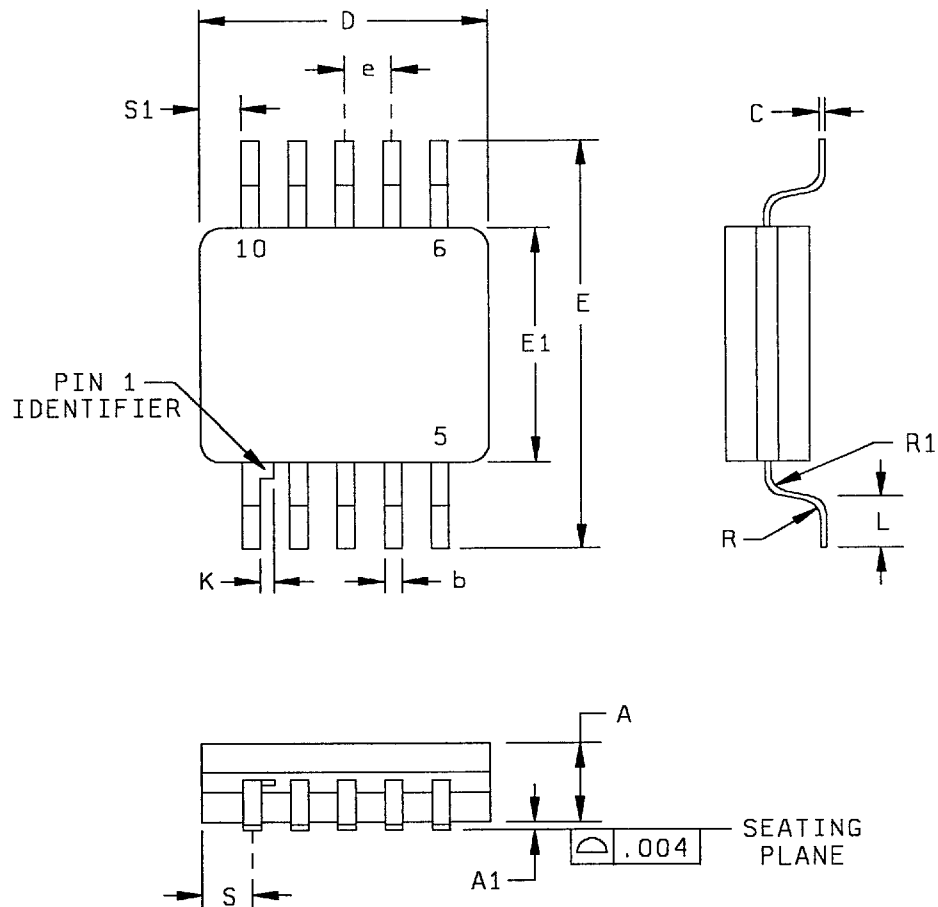


FIGURE 1. Case outline.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-92165
		REVISION LEVEL C	SHEET 9

DSOC FORM 2234
APR 97

■ 9004708 0036499 712 ■

Case X

Letter	Inches		Millimeters		Notes
	Min	Max	Min	Max	
A	.050	.080	1.27	2.03	
A1	.004	.012	0.10	0.30	
b	.015	.019	0.38	0.48	2
C	.004	.008	0.10	0.20	2
D		.270		6.86	
E	.400	.420	10.16	10.67	
E1	.236	.261	5.99	6.63	
e	.048	.052	1.22	1.32	
K	.008	.012	0.20	0.30	
L	.037	.043	0.94	1.09	
R	.013	.017	0.33	0.43	
R1	.013	.017	0.33	0.43	
S		.045		1.14	
S1	.005		0.13		

NOTES:

1. The U.S. government preferred system of measurement is the metric SI system. However, since this item was originally designed using inch pound units of measurement, in the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.
2. Maximum limit may be increased by .003 inch after lead finish is applied.

FIGURE 1. Case outline - Continued.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-92165
		REVISION LEVEL C	SHEET 10

DSCC FORM 2234
APR 97

■ 9004708 0036500 264 ■

Device type			
Case outlines	H and X	P	2
Terminal number	Terminal symbol		
1	N/C	V _{OS} ADJUST	N/C
2	V _{OS} ADJUST	-INPUT	V _{OS} ADJUST
3	-INPUT	+INPUT	N/C
4	+INPUT	-V _S	N/C
5	-V _S	N/C	-INPUT
6	N/C	V _{OUT}	N/C
7	V _{OUT}	+V _S	+INPUT
8	+V _S	V _{OS} ADJUST	N/C
9	V _{OS} ADJUST	---	N/C
10	N/C	---	-V _S
11	---	---	N/C
12	---	---	N/C
13	---	---	N/C
14	---	---	N/C
15	---	---	V _{OUT}
16	---	---	N/C
17	---	---	+V _S
18	---	---	N/C
19	---	---	N/C
20	---	---	V _{OS} ADJUST

FIGURE 2. Terminal connections.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-92165
		REVISION LEVEL C	SHEET 11

DSCC FORM 2234
APR 97

■ 9004708 0036501 170 ■

TABLE II. Electrical test requirements.

Test requirements	Subgroups (in accordance with MIL-STD-883, method 5005, table I)	Subgroups (in accordance with MIL-PRF-38535, table III)	
	Device class M	Device class Q	Device class V
Interim electrical parameters (see 4.2)	1	1	1
Final electrical parameters (see 4.2)	1,2,3,4,5, 1/ 6,9,10,11	1,2,3,4,5, 1/ 6,9,10,11	1,2,3,4,5, 1/ 6,9,10,11
Group A test requirements (see 4.4)	1,2,3,4,5, 6,9,10,11	1,2,3,4,5, 6,9,10,11	1,2,3,4,5, 6,9,10,11
Group C end-point electrical parameters (see 4.4)	1	1	1 2/
Group D end-point electrical parameters (see 4.4)	1	1	1
Group E end-point electrical parameters (see 4.4)	1	1	1

1/ PDA applies to subgroup 1.

2/ Delta limits (see table IIB) shall be required and the delta values shall be computed with reference to the previous endpoint electrical parameters.

TABLE IIB. Delta limits at +25°C.

Parameter	Symbol	Limit	Unit
Input offset voltage	V_{IO}	± 0.75	mV
Input bias current	I_{IB}	± 0.5	μA
Input offset current	I_{IO}	± 35	nA
Common mode rejection ratio	CMRR	± 5	dB

4.3 Qualification inspection for device classes Q and V. Qualification inspection for device classes Q and V shall be in accordance with MIL-PRF-38535. Inspections to be performed shall be those specified in MIL-PRF-38535 and herein for groups A, B, C, D, and E inspections (see 4.4.1 through 4.4.4).

4.4 Conformance inspection. Technology conformance inspection for classes Q and V shall be in accordance with MIL-PRF-38535 including groups A, B, C, D, and E inspections and as specified herein except where option 2 of MIL-PRF-38535 permits alternate in-line control testing. Quality conformance inspection for device class M shall be in accordance with MIL-PRF-38535, appendix A and as specified herein. Inspections to be performed for device class M shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, D, and E inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection.

- Tests shall be as specified in table II herein.
- Subgroups 7 and 8 in table I, method 5005 of MIL-STD-883 shall be omitted.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-92165
		REVISION LEVEL C	SHEET 12

DSCC FORM 2234
APR 97

9004708 0036502 037

4.4.2 Group C inspection. The group C inspection end-point electrical parameters shall be as specified in table II herein.

4.4.2.1 Additional criteria for device class M. Steady-state life test conditions, method 1005 of MIL-STD-883:

- a. Test condition A, B, C or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.
- b. $T_A = +125^{\circ}\text{C}$, minimum.
- c. Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

4.4.2.2 Additional criteria for device classes Q and V. The steady-state life test duration, test condition and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The test circuit shall be maintained under document revision level control by the device manufacturer's TRB in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.

4.4.3 Group D inspection. The group D inspection end-point electrical parameters shall be as specified in table II herein.

4.4.4 Group E inspection. Group E inspection is required only for parts intended to be marked as radiation hardness assured (see 3.5 herein).

- a. End-point electrical parameters shall be as specified in table II herein.
- b. For device classes Q and V, the devices or test vehicle shall be subjected to radiation hardness assured tests as specified in MIL-PRF-38535 for the RHA level being tested. For device class M, the devices shall be subjected to radiation hardness assured tests as specified in MIL-PRF-38535, appendix A for the RHA level being tested. All device classes must meet the postirradiation end-point electrical parameter limits as defined in table I at $T_A = +25^{\circ}\text{C} \pm 5^{\circ}\text{C}$, after exposure, to the subgroups specified in table II herein.
- c. When specified in the purchase order or contract, a copy of the RHA delta limits shall be supplied.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38535 for device classes Q and V or MIL-PRF-38535, appendix A for device class M.

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.1.1 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor prepared specification or drawing.

6.1.2 Substitutability. Device class Q devices will replace device class M devices.

6.2 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished in accordance with MIL-STD-973 using DD Form 1692, Engineering Change Proposal.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-92165
		REVISION LEVEL C	SHEET 13

DSCC FORM 2234
APR 97

■ 9004708 0036503 T73 ■

6.3 Record of users. Military and industrial users should inform Defense Supply Center Columbus when a system application requires configuration control and which SMD's are applicable to that system. DSCC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronic devices (FSC 5962) should contact DSCC-VA, telephone (614) 692-0525.

6.4 Comments. Comments on this drawing should be directed to DSCC-VA , Columbus, Ohio 43216-5000, or telephone (614) 692-0674.

6.5 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-PRF-38535 and MIL-HDBK-1331.

6.6 Sources of supply.

6.6.1 Sources of supply for device classes Q and V. Sources of supply for device classes Q and V are listed in QML-38535. The vendors listed in QML-38535 have submitted a certificate of compliance (see 3.6 herein) to DSCC-VA and have agreed to this drawing.

6.6.2 Approved sources of supply for device class M. Approved sources of supply for class M are listed in MIL-HDBK-103. The vendors listed in MIL-HDBK-103 have agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DSCC-VA.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-92165
		REVISION LEVEL C	SHEET 14

DSCC FORM 2234
APR 97

■ 9004708 0036504 90T ■

STANDARD MICROCIRCUIT DRAWING BULLETIN

DATE: 98-06-23

Approved sources of supply for SMD 5962-92165 are listed below for immediate acquisition information only and shall be added to MIL-HDBK-103 and QML-38535 during the next revision. MIL-HDBK-103 and QML-38535 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DSCC-VA. This bulletin is superseded by the next dated revision of MIL-HDBK-103 and QML-38535.

Standard microcircuit drawing PIN <u>1</u> /	Vendor CAGE number	Vendor similar PIN <u>2</u> /
5962-9216501MHA	<u>3</u> /	LM6162W/883
5962-9216501MPA	27014	LM6162J/883
5962-9216501M2A	<u>3</u> /	LM6162E/883
5962-9216501MXA	27014	LM6162WG/883
5962-9216501VPA	27014	LM6162J-QMLV
5962-9216501VXA	27014	LM6162WG-QMLV

- 1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the vendor to determine its availability.
- 2/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.
- 3/ Not available from an approved source of supply.

Vendor CAGE
number

27014

Vendor name
and address

National Semiconductor Corporation
2900 Semiconductor Drive
PO Box 58090
Santa Clara, CA 95052-8090

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.

■ 9004708 0036505 846 ■