


# SMD Power Inductor CDRH10D68R/T125




**Halogen  
Free**

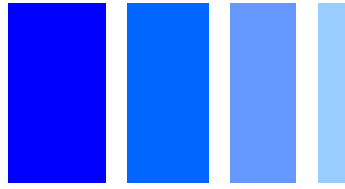

### Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 10.6 × 10.6 × 7.0 mm Max.
- Product weight: 2.7g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.
- Qualified with AEC-Q200.

### Dimension - [mm]

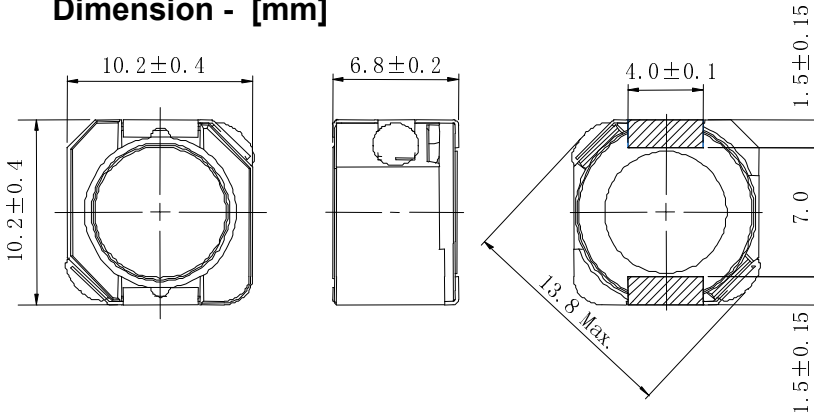


### Environmental Data

- Operating temperature range: -40°C~+125°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+125°C
- Solder reflow temperature: 260 °C peak.

### Packaging

- Carrier tape and reel packaging

### Land pattern and Schematics - [mm]

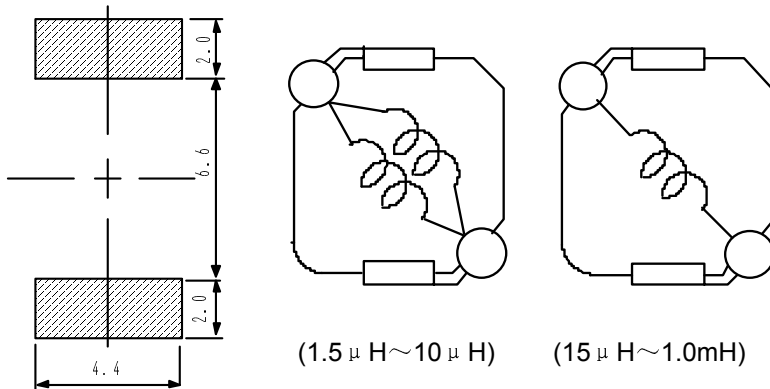

### Applications

- Automotive.

# SMD Power Inductor

## CDRH10D68R/T125



### Electrical Characteristics

Part No.	Stamp	Inductance ( $\mu$ H) [Within] ※1	D.C.R. (m $\Omega$ )[Max.] (at20°C) ※2	Saturation current (A) ※3		Temperature rise current (A) ※4
				(at20°C)	(at125°C) (Typ)	
CDRH10D68RT125NP-1R5NC	1R5	1.5 $\pm$ 30%	6.1(4.9)	11.00	8.50	10.50
CDRH10D68RT125NP-2R2NC	2R2	2.2 $\pm$ 30%	7.1(5.7)	10.50	7.50	9.50
CDRH10D68RT125NP-3R3NC	3R3	3.3 $\pm$ 30%	8.5(6.8)	7.80	5.60	8.30
CDRH10D68RT125NP-4R7NC	4R7	4.7 $\pm$ 30%	9.9(7.9)	7.15	5.17	7.60
CDRH10D68RT125NP-6R2NC	6R2	6.2 $\pm$ 30%	14.2(11.3)	5.95	4.14	6.45
CDRH10D68RT125NP-7R5NC	7R5	7.5 $\pm$ 30%	16.4(13.0)	5.50	3.89	5.55
CDRH10D68RT125NP-100PC	100	10 $\pm$ 25%	21.4(17.1)	4.40	3.60	4.40
CDRH10D68RT125NP-150PC	150	15 $\pm$ 25%	30.6(24.5)	3.60	2.85	3.60
CDRH10D68RT125NP-220PC	220	22 $\pm$ 25%	39.1(31.3)	3.10	2.47	3.10
CDRH10D68RT125NP-330PC	330	33 $\pm$ 25%	59.1(47.3)	2.60	1.85	2.60
CDRH10D68RT125NP-470PC	470	47 $\pm$ 25%	88.3(70.6)	2.00	1.60	2.00
CDRH10D68RT125NP-680PC	680	68 $\pm$ 25%	125(100)	1.80	1.24	1.80
CDRH10D68RT125NP-101PC	101	100 $\pm$ 25%	175(140)	1.50	1.05	1.50
CDRH10D68RT125NP-151PC	151	150 $\pm$ 25%	250(200)	1.23	0.86	1.23
CDRH10D68RT125NP-221PC	221	220 $\pm$ 25%	370(296)	1.00	0.73	1.00
CDRH10D68RT125NP-331PC	331	330 $\pm$ 25%	465(372)	0.80	0.55	0.91
CDRH10D68RT125NP-471PC	471	470 $\pm$ 25%	703(562)	0.68	0.50	0.72
CDRH10D68RT125NP-681PC	681	680 $\pm$ 25%	1030(828)	0.60	0.40	0.61
CDRH10D68RT125NP-102PC	102	1000 $\pm$ 25%	1560(1253)	0.45	0.33	0.49


※ 1 Measuring frequency inductance at 100kHz.

※ 2 ( ) are typical value

※ 3 Saturation current: The value of D.C. current when the inductance decreases to 65% of its nominal value.













※ 4 Temperature rise current: The value of D.C. current when the temperature rise is  $\Delta t=40^{\circ}\text{C}$  ( $T_a=20^{\circ}\text{C}$ ).

# SMD Power Inductor CDRH10D68R/T125

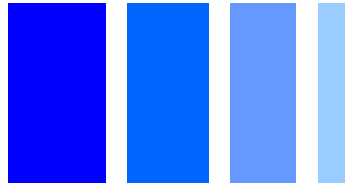


## Saturation Current & Temperature Rise Graph

— L (20°C) — L (125°C) —  $\Delta T$

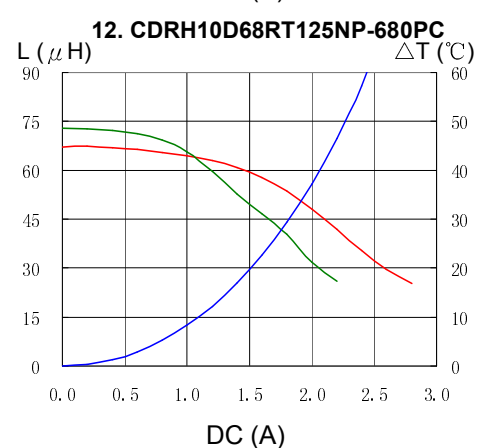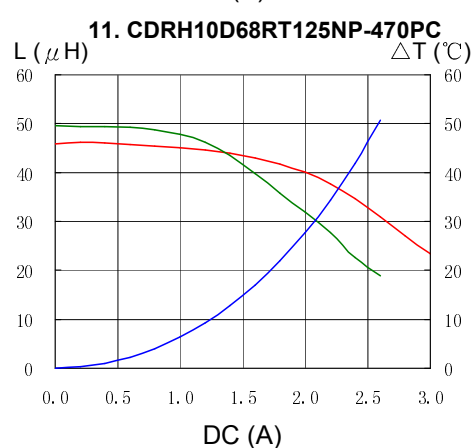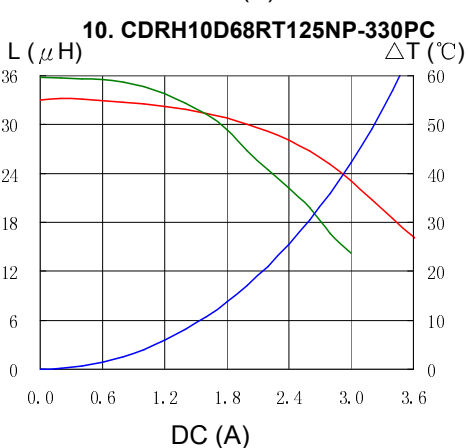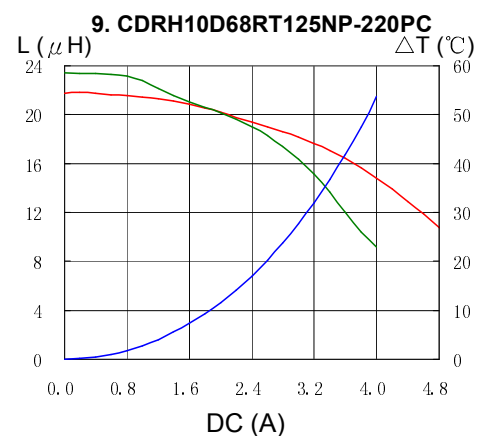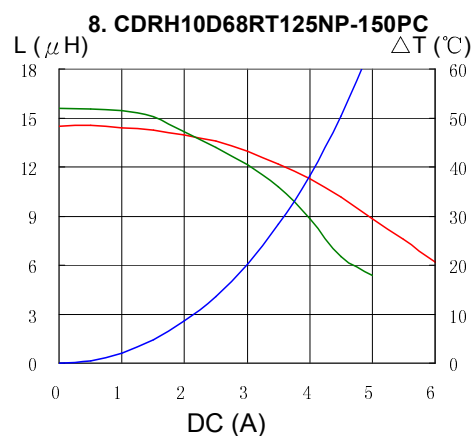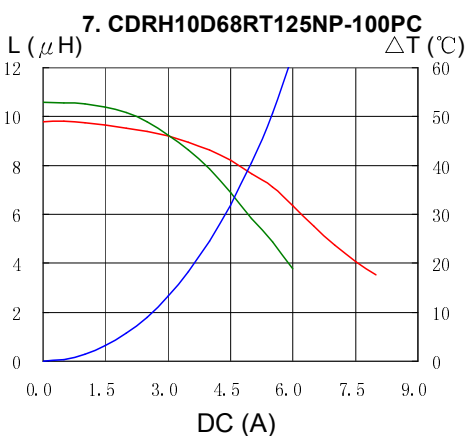
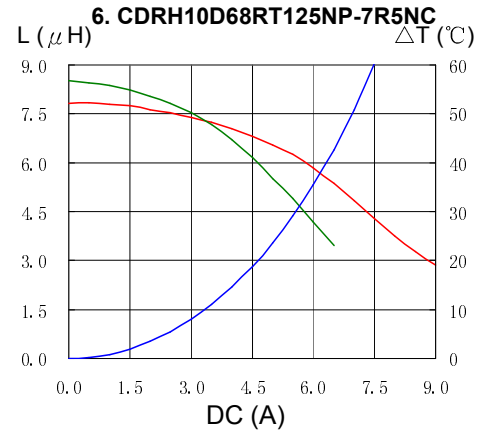
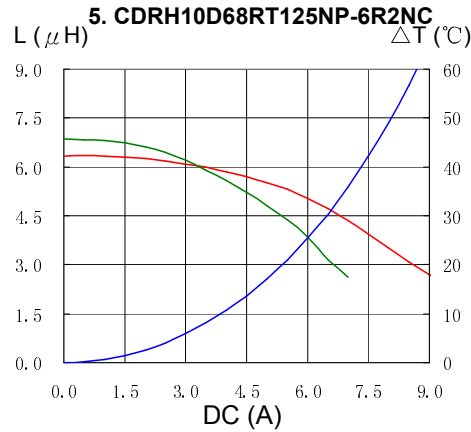
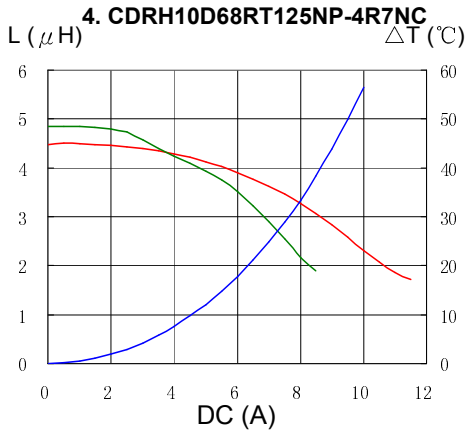
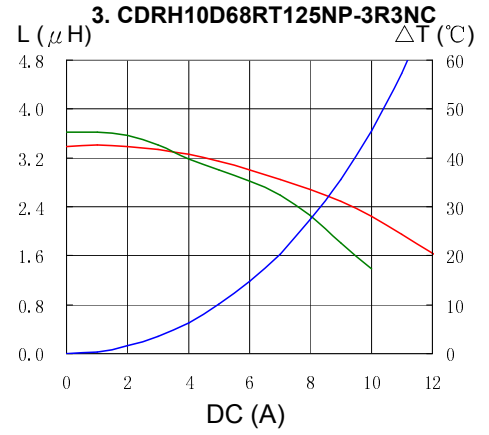
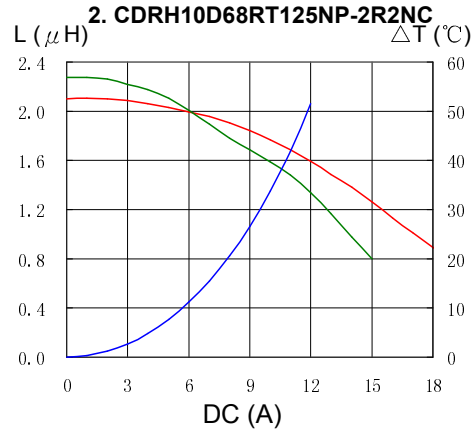
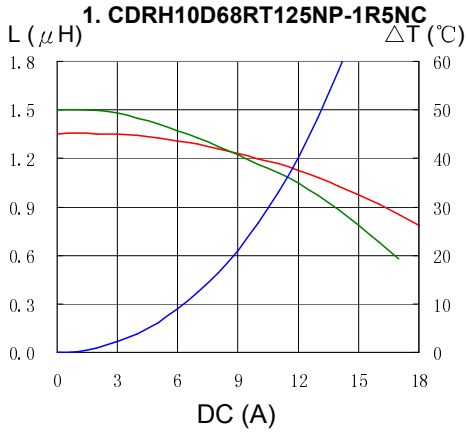


# SMD Power Inductor CDRH10D68R/T125

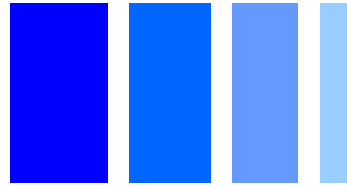

## Saturation Current & Temperature Rise Graph



— L (20°C) — L (125°C) —  $\Delta T$

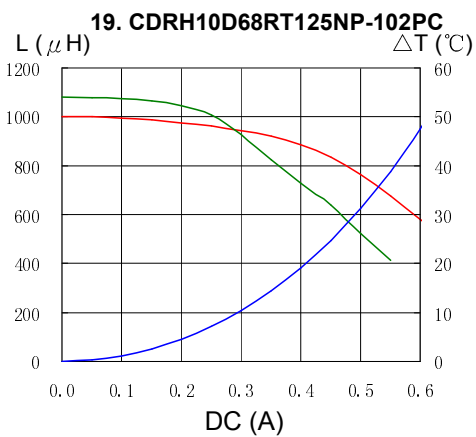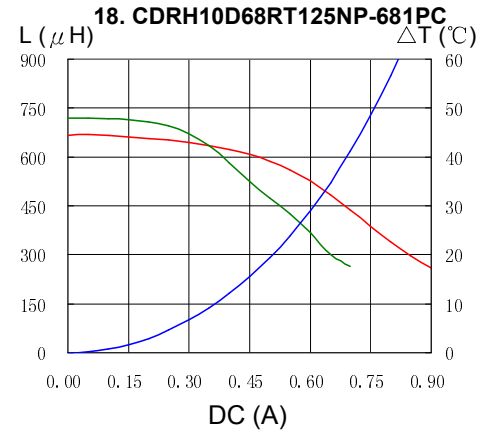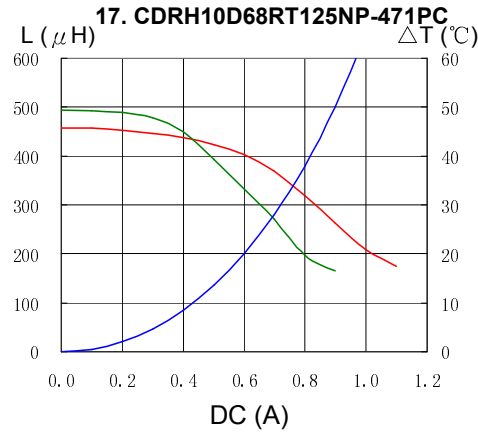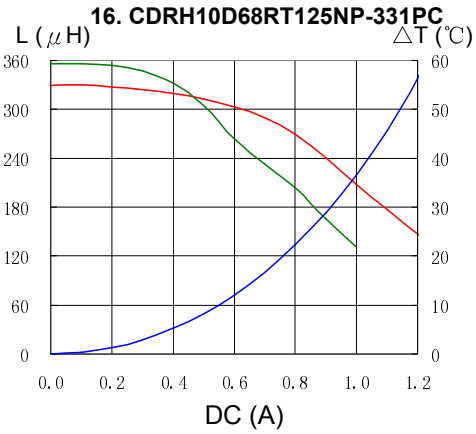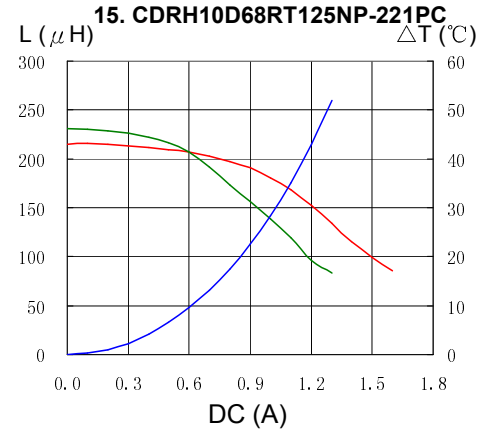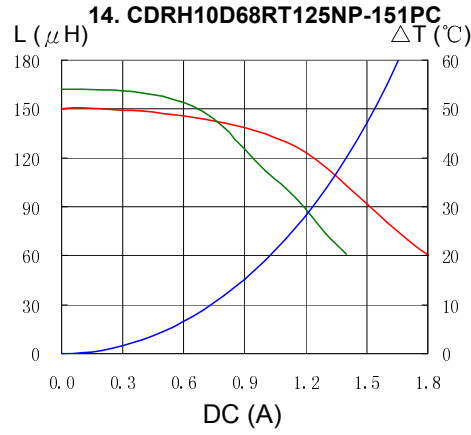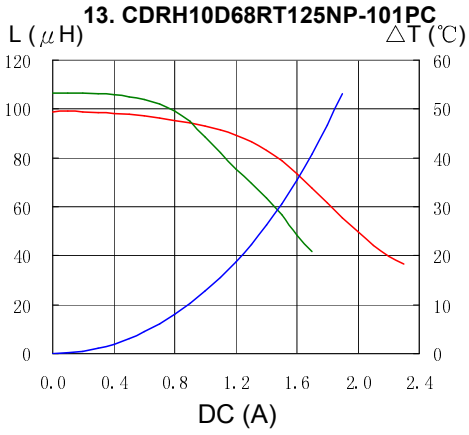

# SMD Power Inductor CDRH10D68R/T125



## Solder Reflow Condition

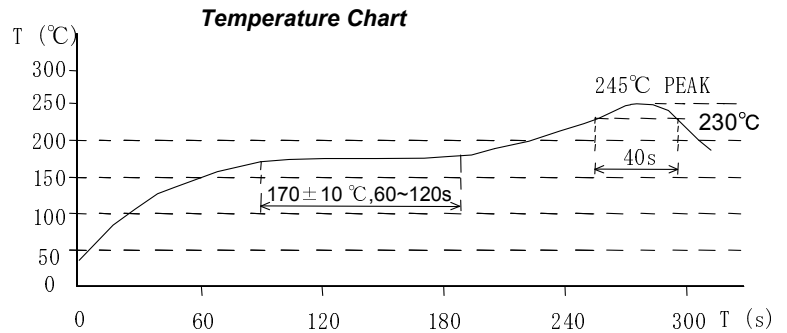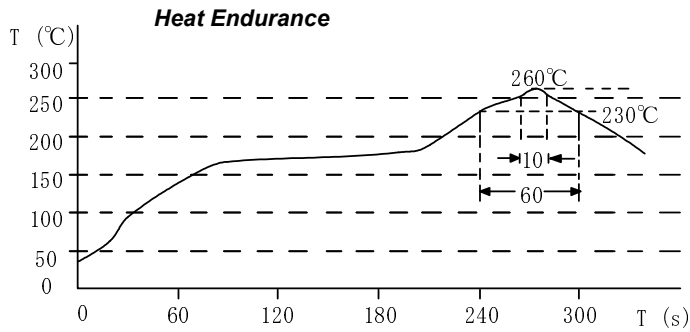

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6688

FAX.+852-2565-9600

[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Tokyo

Tel.+81-3-5202-7112

FAX.+81-3-5202-7105

[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700

FAX. +1-847-545-6720

[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-021-5836-3299

FAX.+86-021-5836-3266

[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777

FAX.+82-2-6237-0778

[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Obernzell

Tel.+49-8591-937-0

FAX. +49-8591-937-103

[contact@sumida-eu.com](mailto:contact@sumida-eu.com)

### Shenzhen

Tel.+86-755-8291-0228

FAX.+86-755-8291-0338

[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388

FAX.+65-6296-3390

[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110

FAX. +49-9181-4509-310

[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737

FAX.+886-2-8751-2738

[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-3219660

FAX.+1-408-321-9308

[sales@us.sumida.com](mailto:sales@us.sumida.com)