


**Ultra Low Dropout
 Linear Regulator
 Hermetic Package**

**OM8503SC
 OM8503SF
 +7.4Vin to +6.8Vout at 3.0A**

Product Summary

Part Number	Dropout	Io	Vin	Vout	Package
OM8503SC	0.4 V	3.0A	7.4V	6.8V	MO-078AA
OM8503SF	0.4 V	3.0A	7.4V	6.8V	8-lead Flatpack

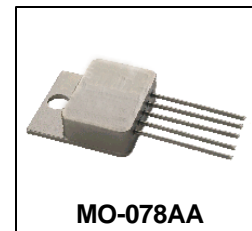

The OM8503 is an ultra low dropout linear regulator designed specifically for hi-rel applications. Housed in either a 5 pin through hole or 8 lead surface mount package these regulators provide high reliability in military/defense applications. The ultra low dropout voltage of 0.4V @ 3A makes the part particularly useful for applications requiring low noise and higher efficiency.

Features:

- Ultra low dropout voltage of 0.4 volt significantly reduces power consumption
- Low noise, higher efficiency
- Remote shutdown permits power sequencing to be easily implemented
- Hermetic MO-078AA (TO-258AA) and 8-lead flat pack ensure higher reliability
- Available H-level screened

Absolute Maximum Ratings

Symbol	Parameter	Value	Units
I_o	Output Current	3.5	A
V_{in}	Input Voltage	+8.0	V
P_{TOT}	Power Dissipation TC=25 °C	19	W
R_{THJC}	Thermal Resistance, Junction to Case (MO-078AA)	6.5	°C/W
R_{THJC}	Thermal Resistance, Junction to Case (8 lead flatpack)	6.5	°C/W
T_J	Operating Junction	-55 to +125	°C
T_{STG}	Storage Temperature Range	-65 to +150	°C
T_L	Lead Temperature	300	°C


Electrical Characteristics @ TA= 25°C (Unless Otherwise Specified)



Parameter	Conditions	Symbol	Min.	Typ.	Max	Unit
Output Voltage	Vin= 7.4V, Io= 3.0A	Vout	6.732	6.8	6.868	V
Input Voltage Range- Operating	Io= 3.0A		7.2		8.0	V
Line Regulation	7.1 ≤ Vin ≤ 7.7, Io= 3.0A	Vline	-100		+100	mV
	6.7 ≤ Vin ≤ 8.1, Io= 50mA		-5		+5	mV
Load Regulation	Vin= 7.4V 10ma ≤ Iout ≤ 3.0A	Vload	-20		+20	mV
Dropout Voltage	Io= 3.0A, Vout= 6.8V	Vdrop			0.4	V
Current Limit	Vin= 7.4V, Overcurrent Latchup	I _{latch}	3.0			A
Ripple Rejection	F= 120 Hz., Vout= Vref		65			dB
Shutdown Source Current	Vshdn= 5V	Ishdn		200		uA
Shutdown Pin Threshold	Isource= 200uA	Vshdn	1.0		1.6	V
Output Voltage at Shutdown	Vin= 7.4V, Io= 50mA, Shdn= +5.0V	Vout (shdn)	-0.1		+0.1	V

Electrical Characteristics TA= -55 to +125°C

Parameter	Conditions	Symbol	Min.	Typ.	Max	Unit
Output Voltage	Vin= 7.4V, Io= 3.0A	Vout	6.46	6.8	7.14	V
Input Voltage Range- Operating	Io= 3.0A		7.2		8.0	V
Line Regulation	7.1 ≤ Vin ≤ 7.7, Io= 3.0A	Vline	-150		+150	mV
	6.7 ≤ Vin ≤ 8.1, Io= 50mA		-150		+150	mV
Load Regulation	Vin= 7.4V 10ma ≤ Iout ≤ 3.0A	Vload	-150		+150	mV
Dropout Voltage	Io= 3.0A, Vout= 6.8V	Vdrop			0.4	V
Current Limit	Vin= 7.4V, Overcurrent Latchup	I _{latch}	3.0			A
Ripple Rejection	F= 120 Hz., Vout= Vref		65			dB
Shutdown Source Current	Vshdn= 5V	Ishdn		200		uA
Shutdown Pin Threshold	Isource= 200uA	Vshdn	1.0		1.6	V
Output Voltage at Shutdown	Vin=7.4V, Io= 50mA, Shdn= +5.0V	Vout (shdn)	-0.1		+0.1	V

Simplified Schematic

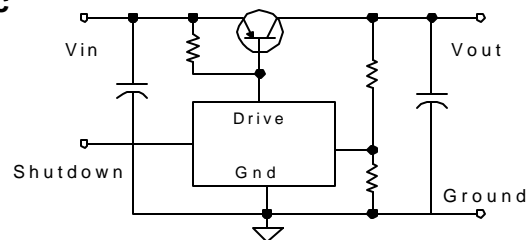

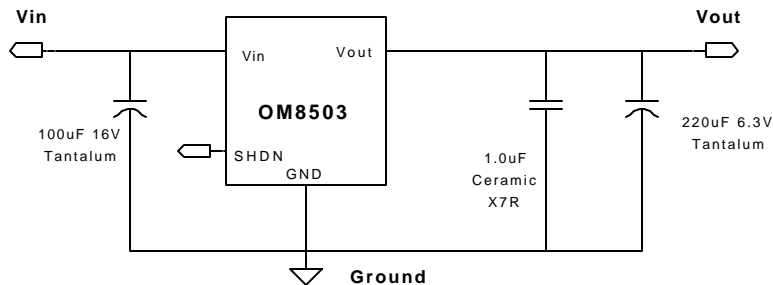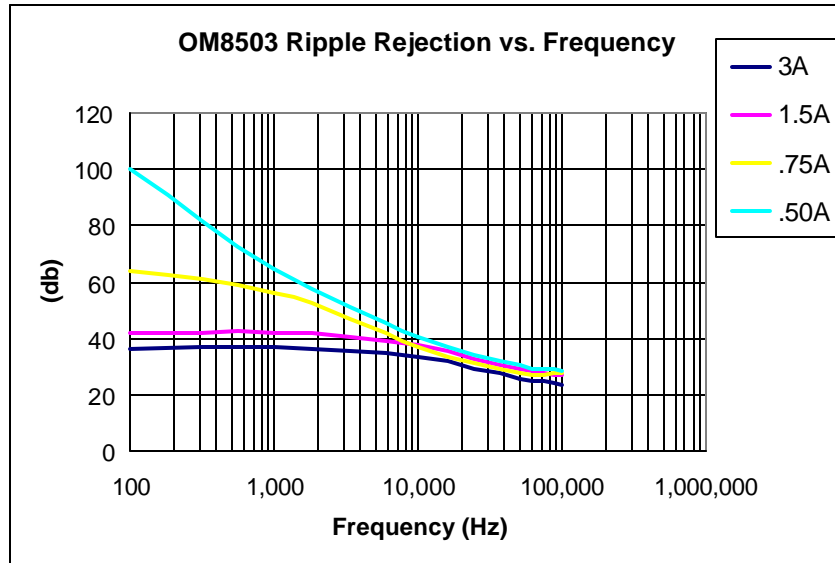

In order to maintain regulation and stability specified additional input and output bulk capacitors are recommended. Capacitors recommended above should be low ESR tantalums with tolerances of +/- 20% max. Internal to the product are a 4.7uF input capacitor and a 4.7uF output capacitor in parallel with a 0.33uF ceramic capacitor.

Shutdown: The regulator can be shutdown by applying a voltage >1.6V to pin 4. The regulator will restart when the SHDN pin is pulled below the shutdown threshold of 1.0V. If remote shutdown is not required, pin 4 should be connected to GND to insure a safe "off" state.

Part Number Nomenclature				
OM	8503	X	X	X
Omnirel	Device	S=Isolated N=Non-Isolated	Package	Screening

Part Number	Package Description	Screening
OM8503SCP	MO-078AA 5 - Lead	100% Final Electrical
OM8503SCH	MO-078AA 5 - Lead	Class H per MIL-PRF-38534
OM8503SFP	8 -Lead Flat Pack	100% Final Electrical
OM8503SFH	8 -Lead Flat Pack	Class H per MIL-PRF-38534

MIL-PRF-38534 Screening Requirements

TEST/INSPECTION	SCREENING LEVEL	MIL-STD-883
	Class H	Method
Pre Seal Burn-In	Optional	1030
Nondestructive Bond Pull	N/A	2023
Internal Visual	100%	2017
Temperature Cycle	100%	1010
Constant Acceleration	100%	2001
Mechanical Shock	100%	2002
PIND	N/A	2020
Pre Burn-In Electrical	Optional	
Burn-In	100%	1015
Final Electrical	100%	
Seal	100%	1014
Radiographic	N/A	2012
External Visual	100%	2009