

Coaxial Directional Coupler

50Ω

0.5 to 500 MHz

ZMDC-10-1+
ZMDC-10-1



CASE STYLE: M21

Connectors	Model	Price	Qty.
SMA	ZMDC-10-1(+)	\$49.95	(1-9)
BRACKET (OPTION "B")		\$5.00	(1+)
BRACKET (OPTION "BR")		\$1.50	(1+)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

INPUT	3
OUTPUT	2
COUPLED	1

Features

- excellent mainline loss, 0.65 dB typ.
- excellent directivity, 32 dB typ.
- rugged shielded case

Applications

- HF/VHF/UHF
- amateur radio
- instrumentation

Directional Coupler Electrical Specifications


FREQ. RANGE (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)						DIRECTIVITY (dB)						VSWR (:1)	POWER INPUT (W)	
	Nom.	Flatness	L		M		U		L		M		U			Typ.	L
f_L - f_U			Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Max.
0.5-500	11.5±0.5	±0.6	0.85	1.3	0.65	1.0	0.85	1.3	32	25	32	25	22	15	1.2	1.5	3.0

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]
1. Mainline loss includes theoretical power loss at coupled port.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		Cpl
				In	Out	
0.50	0.73	11.62	75.22	63.60	25.33	20.56
0.90	0.69	11.57	75.75	64.18	28.71	21.79
4.00	0.58	11.45	74.20	62.75	34.21	24.05
48.00	0.60	11.49	60.95	49.46	34.66	24.10
124.00	0.63	11.55	52.70	41.15	31.03	23.50
210.00	0.67	11.62	47.91	36.29	27.67	22.54
260.00	0.70	11.66	45.71	34.05	26.27	21.97
320.00	0.73	11.71	42.88	31.17	24.90	21.32
420.00	0.81	11.80	38.25	26.46	23.14	20.45
500.00	0.88	11.86	34.83	22.98	21.97	19.97


Outline Drawing

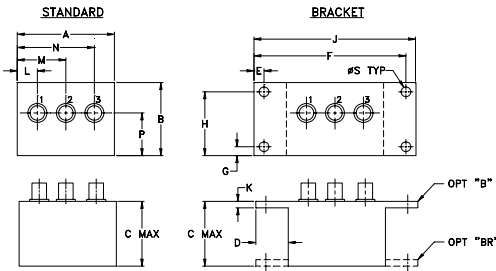


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
1.50	1.13	1.00	.50	.155	2.345	.138	.987
38.10	28.70	25.40	12.70	3.94	59.56	3.51	25.07
J	K	L	M	N	P	S	wt
2.50	.10	.31	.75	1.19	.66	.150	grams
63.50	2.54	7.87	19.05	30.23	16.76	3.81	40.0


ZMDC-10-1 MAINLINE LOSS

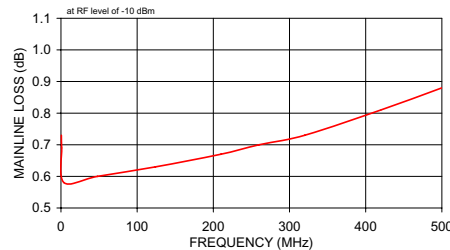


ZMDC-10-1 COUPLING & DIRECTIVITY

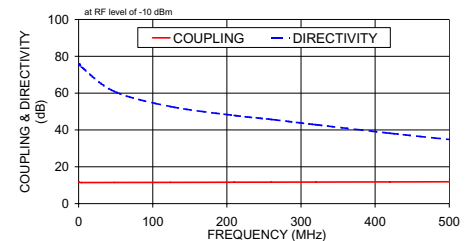

ZMDC-10-1 RETURN LOSS

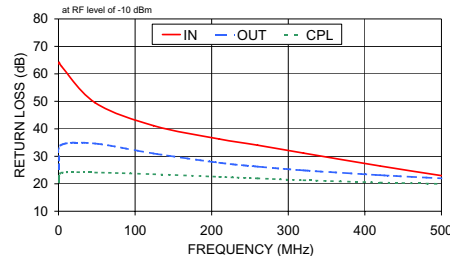

Electrical Schematic



* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com
I/F/R/F MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. B
M119986
ZMDC-10-1
WZ/TD/CP/AM
090917