



**PASTERNAK ENTERPRISES, INC.**  
 PO Box 16759  
 Irvine, CA 92623-6759

Toll Free: (866) 727-8376  
 Direct: +1 (949) 261-1920  
 FAX: +1 (949) 261-7451  
 Sales: sales@pasternack.com  
 Tech Support: techsupport@pasternack.com

**PE51006**  
**Wideband**  
**Mobile Antenna,**  
**406 - 512 MHz, 2 dB**

**Product Features**

- 106 MHz bandwidth
- No tuning required
- NMO Mount base

**Description**


The PE51006 antenna offers excellent bandwidth and low VSWR across the 406 to 512 MHz UHF band. The base and matching coil design is able to withstand high shock environments. The antenna mates with the popular NMO mount design. See the Pasternack catalog or website for the widest selection of NMO cable configurations.

**Electrical Specifications <sup>(1)</sup>**

Parameter	Units	Value
Impedance	Ohms	50
Frequency	MHz	406 - 512
VSWR across bandwidth		< 2.0:1
Gain, ground plane	dB	2.0
Gain, no ground plane	dB	0
Power Rating	Watts	150

**Mechanical Specifications <sup>(1)</sup>**

Parameter	Value
Antenna Height	Approximately 12"
Whip Diameter	0.10"
Weight	0.6 lbs.
Whip Material	Stainless Steel
Base Coil Housing	Molded polymer jacket & nickel and chrome plated brass bushing
Mating Mount	NMO

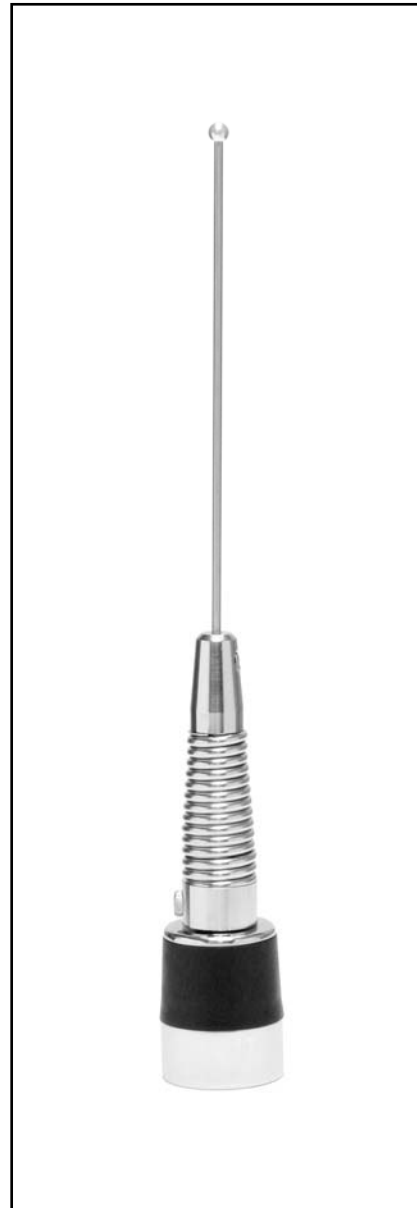

**Ordering Information**

Part Number	Description
PE51006	Wideband Mobile Antenna, 106 MHz BW @ 2:1 VSWR, No GP required

(1) Pasternack reserves the right to change specifications or information without notice.  
[www.pasternack.com](http://www.pasternack.com)