

SiBar Thyristor Surge Protectors TVBxxxRSC-L Series

Table SB1 - Electrical Characteristics

Part Number	V _{DM} Max. (V)	V _{BO} Max. (V)	I _H Min. (mA)	V _T Max. (V)	C1 (Typ) @ 50V _{DC} Bias (pF)	C2 (Typ) @ 2V _{DC} Bias (pF)	Off-State Current @VDM (μA)
TVB006RSC-L	6	25	50 (typ)	4	---	75	5
TVB025RSC-L	25	40	150	4	---	65	5
TVB035RSC-L	35	55	150	4	---	55	5
TVB065RSC-L	65	88	150	4	45	90	5
TVB090RSC-L	90	125	150	4	40	80	5
TVB120RSC-L	120	160	150	4	35	75	5
TVB140RSC-L	140	180	150	4	30	65	5
TVB170RSC-L	170	220	150	4	30	60	5
TVB190RSC-L	190	260	150	4	30	60	5
TVB220RSC-L	220	295	150	4	30	60	5
TVB270RSC-L	275	350	150	4	30	60	5
TVB300RSC-L	320	400	150	4	25	50	5
TVB360RSC-L	360	460	150	4	25	50	5
TVB400RSC-L	400	540	150	4	20	45	5


Notes: All electrical characteristics are measured at 25°C.
 V_{DM} measured per UL497B pulse requirements: at max. off-state leakage current (IDM) = 5 μA.
 V_{BO} measured at 100V/μs.

Table SB2 – Surge Current Rating

Part Number	TIA-968		Telcordia GR-1089*		IEC61000-4-5	ITU K.20/21/45*			
	Type A	Type B				I _{PP} (A)	I _{TSM} Min. (A)	di/dt (A/μs)	dV/dt (V/μs)
TVBxxxRSC-L	150	140	100	500	400	5 x 310 μs (VOC: 10 x 700μs)	41	500	2000

Notes: *Lightning current wave forms for applicable industry specification.
 I_{TSM}, peak on-state surge current is measured at 60 Hz, one cycle.
 di/dt: critical rate-of-rise of on-state current (pulsed power amplifier Vmax = 600V; C = 30μF).
 dV/dt: critical rate-of-rise of off-state voltage (linear wave form, V₀ = rated V_{BO}, T_i = 25°C)

Figure SB1 - Voltage-Current Characteristics

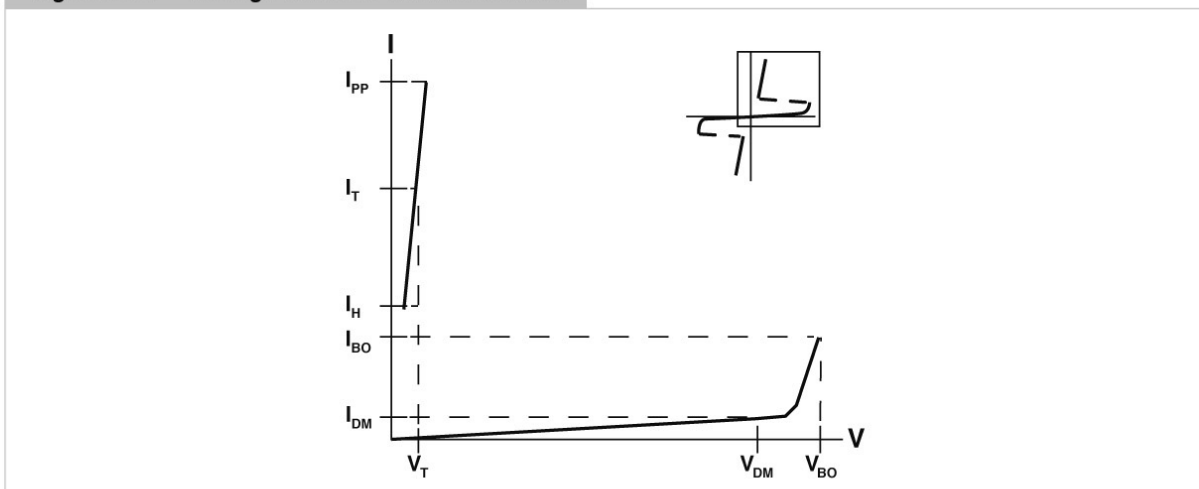

The voltage current (V-I) is useful in depicting the electrical characteristics of the SiBar thyristor surge protectors in relation to each other.

SiBar Thyristor Surge Protectors TVBxxxRSC-L Series

Figure SB2 - Dimension Figure

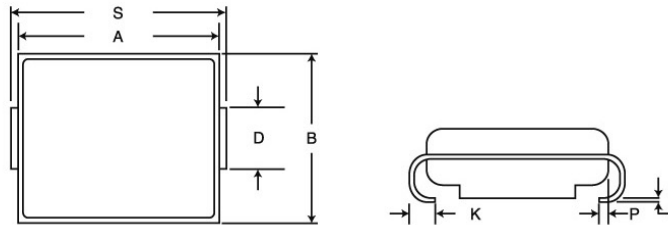


Table SB3 – Dimensions in Millimeters

Dimension	A		B		C		D	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
TVBxxxRSC-L	4.06 (0.160)	4.57 (0.180)	3.30 (0.130)	3.94 (0.155)	1.90 (0.075)	2.41 (0.095)	1.95 (0.077)	2.20 (0.086)

Dimension	H		J		K		P	S	
	Min.	Max.	Min.	Max.	Min.	Max.	Ref	Min	Max.
TVBxxxRSC-L	0.051 (0.002)	0.200 (0.008)	0.150 (0.006)	0.31 (0.012)	0.76 (0.030)	1.27 (0.050)	0.51 (0.202)	5.21 (0.205)	5.59 (0.220)

Notes: *D dimension is measured within dimension P.
TVB series devices use industry standard SMB package type.
All devices are bidirectional and may be oriented in either direction for installation

Table SB4 – Physical Characteristics and Environmental Specifications

Lead material	Matte tin finish (-L devices)
Encapsulating material	Epoxy, meets UL94V-0 requirements
Solderability	per MIL-STD-750, Method 2026
Solder heat withstand	per MIL-STD-750, Method 2031
Solvent resistance	per MIL-STD-750, Method 1022
Mechanical shock	per MIL-STD-750, Method 2016
Vibration	per MIL-STD-750, Method 2056
Storage temperature (°C)	-55 to 150
Operating temperature (°C)	-40 to 125
Junction temperature (°C)	150
Maximum Lead Temperature for Soldering Purpose; for 10s (°C)	260

Table SB5 – Reliability Tests

Test	Conditions	Duration
High temperature, reverse bias	+100°C, 50VDC bias	1000 hours
High humidity, high temperature, reverse bias	85% RH, +85°C, 50VDC bias	1000 hours
High temperature storage life	+150°C	1000 hours
Temperature cycling	-65°C to +150°C, 15 minute dwell	1000 cycles
Autoclave	100% RH, +121°C, 15 PSI	96 hours

SiBar Thyristor Surge Protectors TVBxxxRSC-L Series

Figure SB7 - Recommended Pad Layout

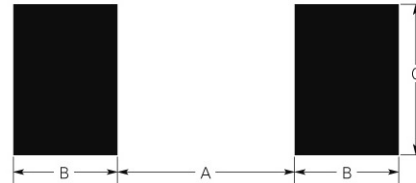


Table SB6 – Packaging and Marking Information

Part Description	Tape and Reel Quantity	Standard Package	Part Marking	Recommended Pad Layout (millimeters/inchs)			Agency Recognition*
				Dimension A (Nom.)	Dimension B (Nom.)	Dimension C (Nom.)	
TVB006RSC-L	2,500	10,000	06RC	2.261 (0.089)	2.159 (0.085)	2.743 (0.108)	UL
TVB025RSC-L	2,500	10,000	25RC	2.261 (0.089)	2.159 (0.085)	2.743 (0.108)	UL
TVB035RSC-L	2,500	10,000	35RC	2.261 (0.089)	2.159 (0.085)	2.743 (0.108)	UL
TVB065RSC-L	2,500	10,000	65RC	2.261 (0.089)	2.159 (0.085)	2.743 (0.108)	UL
TVB090RSC-L	2,500	10,000	90RC	2.261 (0.089)	2.159 (0.085)	2.743 (0.108)	UL
TVB120RSC-L	2,500	10,000	12RC	2.261 (0.089)	2.159 (0.085)	2.743 (0.108)	UL
TVB140RSC-L	2,500	10,000	14RC	2.261 (0.089)	2.159 (0.085)	2.743 (0.108)	UL
TVB170RSC-L	2,500	10,000	17RC	2.261 (0.089)	2.159 (0.085)	2.743 (0.108)	UL
TVB190RSC-L	2,500	10,000	19RC	2.261 (0.089)	2.159 (0.085)	2.743 (0.108)	UL
TVB220RSC-L	2,500	10,000	22RC	2.261 (0.089)	2.159 (0.085)	2.743 (0.108)	UL
TVB270RSC-L	2,500	10,000	27RC	2.261 (0.089)	2.159 (0.085)	2.743 (0.108)	UL
TVB300RSC-L	2,500	10,000	30RC	2.261 (0.089)	2.159 (0.085)	2.743 (0.108)	UL
TVB360RSC-L	2,500	10,000	36RC	2.261 (0.089)	2.159 (0.085)	2.743 (0.108)	UL
TVB400RSC-L	2,500	10,000	40RC	2.261 (0.089)	2.159 (0.085)	2.743 (0.108)	UL

*UL497B, File # E179610